


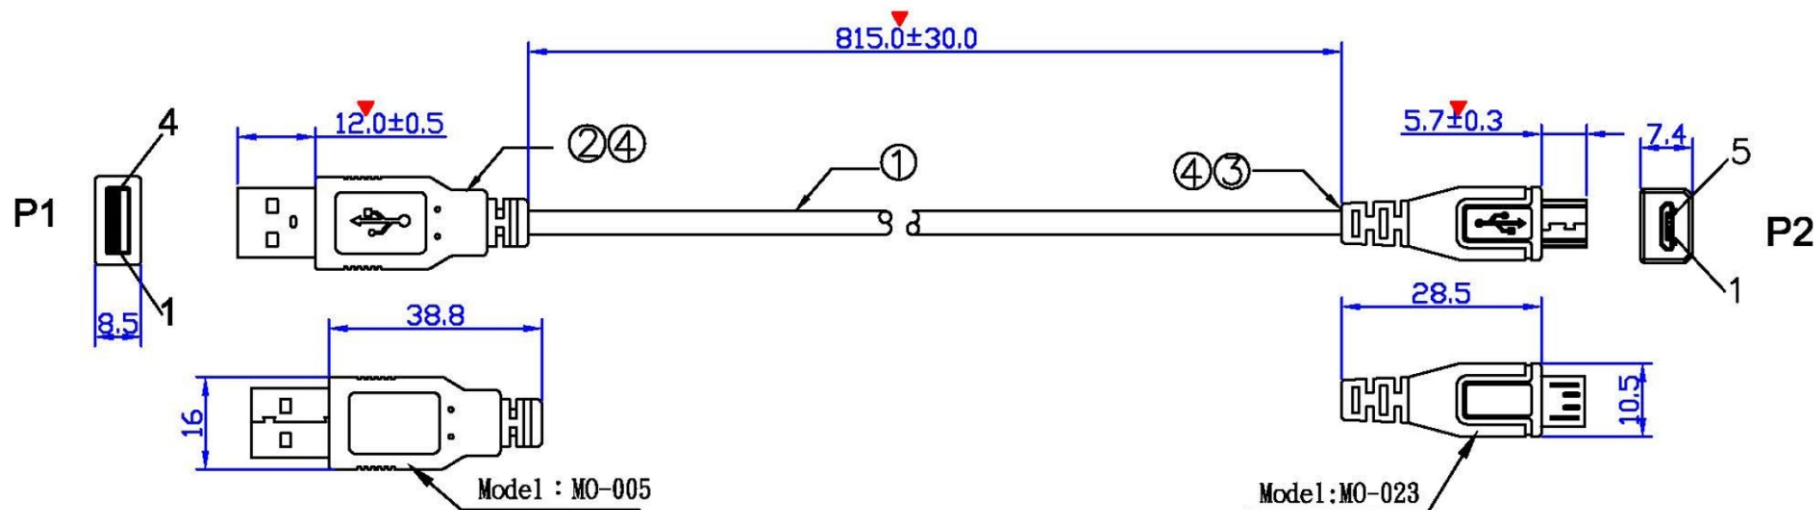

Electrical Properties:

1. It should be no any open/short, miswiring and intermittent failures .
2. The cable shall be 100% electrical test .
3. Voltage test: DC 300V 10MS;
Insulation resistance: 5.0M ohm/min;
Conductance resistance: 5.0 ohm/max .

Machinery Character:

1. ALL dimension are "mm/inch" except specified.
2. The cable should be clean, free of oiled/flash/burred.
3. Cable Ass'y shall be RoHS Compliant .

Marked "▼" Should Be FAI DIM.

4	PVC: 45P PVC, Color: Black	G	12
3	P2 Conn: Micro USB 公头, 一体焊线式, 黑胶芯, 普通型.	PCS	1
2	P1 Conn: USB 2.0 A Type Male , Pin G/F.	PCS	1
1	Cable: UL2725 28AWG*1pair+28AWG*2C+AL/MY+braid, 2.0 Rev, OD=3.7±0.15mm , Jacket Color : Black .	MM	
Item	DESCRIPTION	UNIT	QTY

PIN OUT

P1		P2	
1	—————	1	Red
2	—————	2	White
3	—————	3	Green
4	—————	5	Black
S	—————	S	Braid

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIBUB-5B4A28-M81C5-LF

SERIES

LEADFREE

815mm

MALE TO MALE

28 AWG

5 PIN B TYPE TO 4 PIN A TYPE

DESCRIPTION: