


注意MICRO 方向

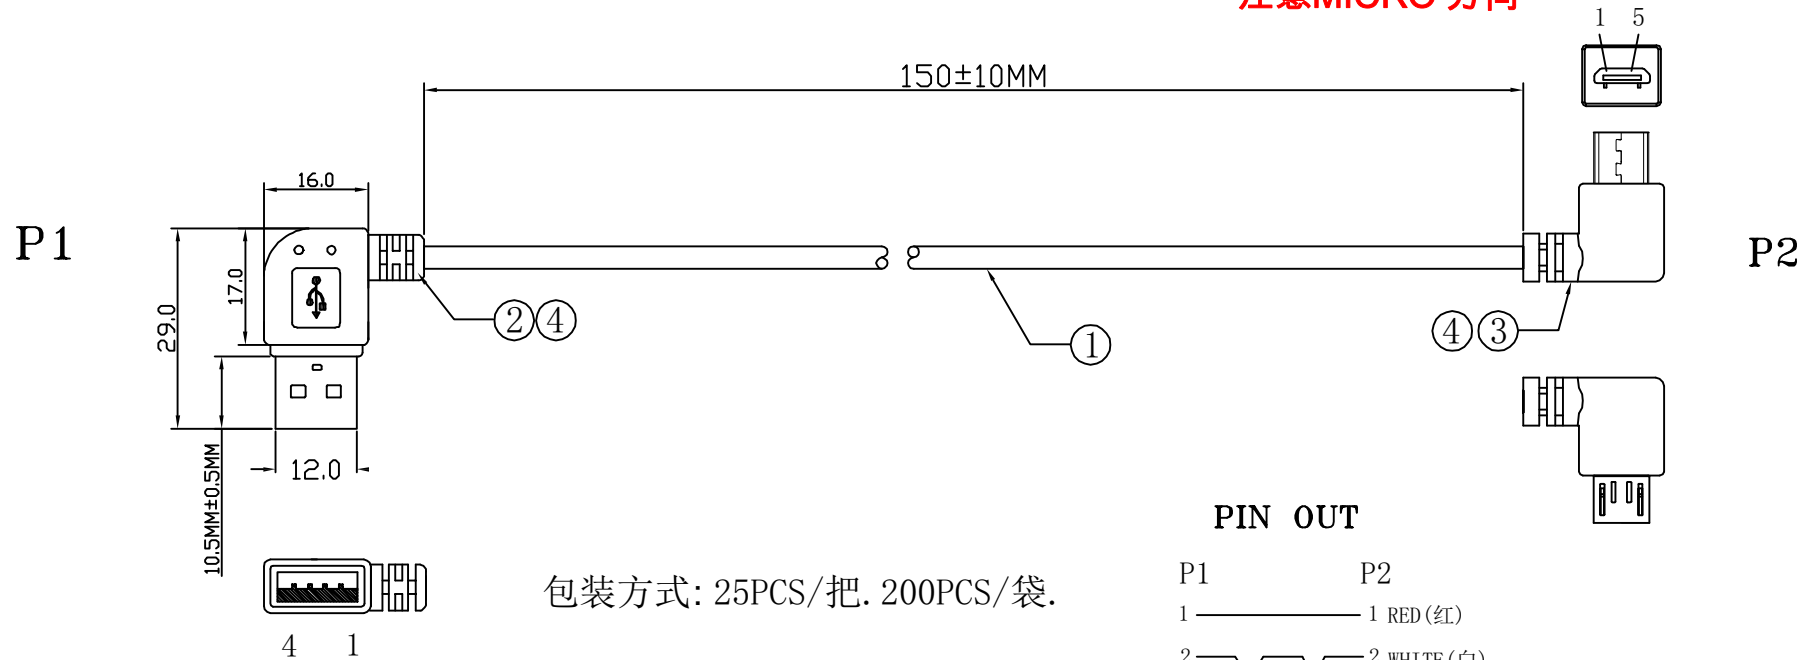

包装方式: 25PCS/把. 200PCS/袋.

PIN OUT

P1	P2
1	1 RED (红)
2	2 WHITE (白)
3	3 GREEN (绿)
4	5 BLACK (黑)
SHELL	BRAID
	SHELL (编织)

ELECTRONIC TEST CONDITION:
100% OPEN SHORT & MISWIRE TEST.
CONDCTIVE RESISTANCE:2Ω/MAX
INSULATION RESISTANCE:20MΩ/MIN.AT DC 300V

PART LIST:本产品均符合“ROHS”环保标准, 用的材料均为相当品。

4	PVC:45P BLACK.		KG/K
3	MICRO USB:5P GOLD FLASH CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:BLACK	1	SET
2	USB AM: GOLD FLASH CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:WHITE	1	SET
1	CABLE: CABLE UL2725 28AWG*1P+28AWG*2C+AB CABLE BLACK OD:3.5MM. L=200MM.	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBUB-5BR4AR28-M15C-LF

SERIES

LEADFREE

150mm

MALE TO MALE

28 AWG

5 PIN B TO 4 PIN A 90°

DESCRIPTION: USB AM 90度侧弯 TO MICRO 5P 90度侧弯 CABLE BLACK L=150MM