


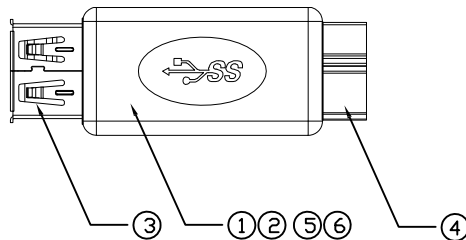


CONN#1



CONN#2

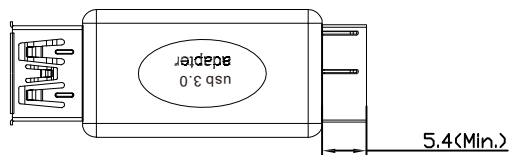

PIN ASSIGNMENT:

CONN.#1

CONN.#2

1	_____	1
2	_____	2
3	_____	3
4	_____	5
5	_____	9
6	_____	10
7	_____	8
8	_____	6
9	_____	7

SHELL _____

SHELL _____

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TESTING
- WITHSTANDING VOLTAGE:DC 300V 0.1Sec
- INSULATION RESISTANCE:20M Ohms(Min)
- CONDUCTIVE RESISTANCE:1.0 Ohms(Max)

NO.	DESCRIPTION	QTY.	MATERIAL
6	OVERMOLD	5g	PVC 45P BLUE UL94V-0
5	INNERMOLD	1.7g	PE LOW DENSITY
4	CONN#2	1	USB3.0 MicroB 短體銅殼鍍銀端子鍍金15U"
3	CONN#1	1	USB 3.0 AF 銅殼鍍銀端子鍍金15U"
2	CABLE	1	電子線 7/0.12TC L=0.025M
1	CABLE	9	電子線 7/0.12TC L=0.023M

MIBUB-EM-10B9A-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. MIBUB-EM-10B9A

DWG NO. MIBUB-EM-10B9A

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

X. ±
.X ± 0.50
.XX ± 0.25
.XXX ± 0.10
ANG

DESCRIPTION:

CABLE ASSEMBLY,
USB 3.0 A(F) TO USB 3.0 Micro

AREA

REVISIONS

DATE

焯倫股份有限公司