



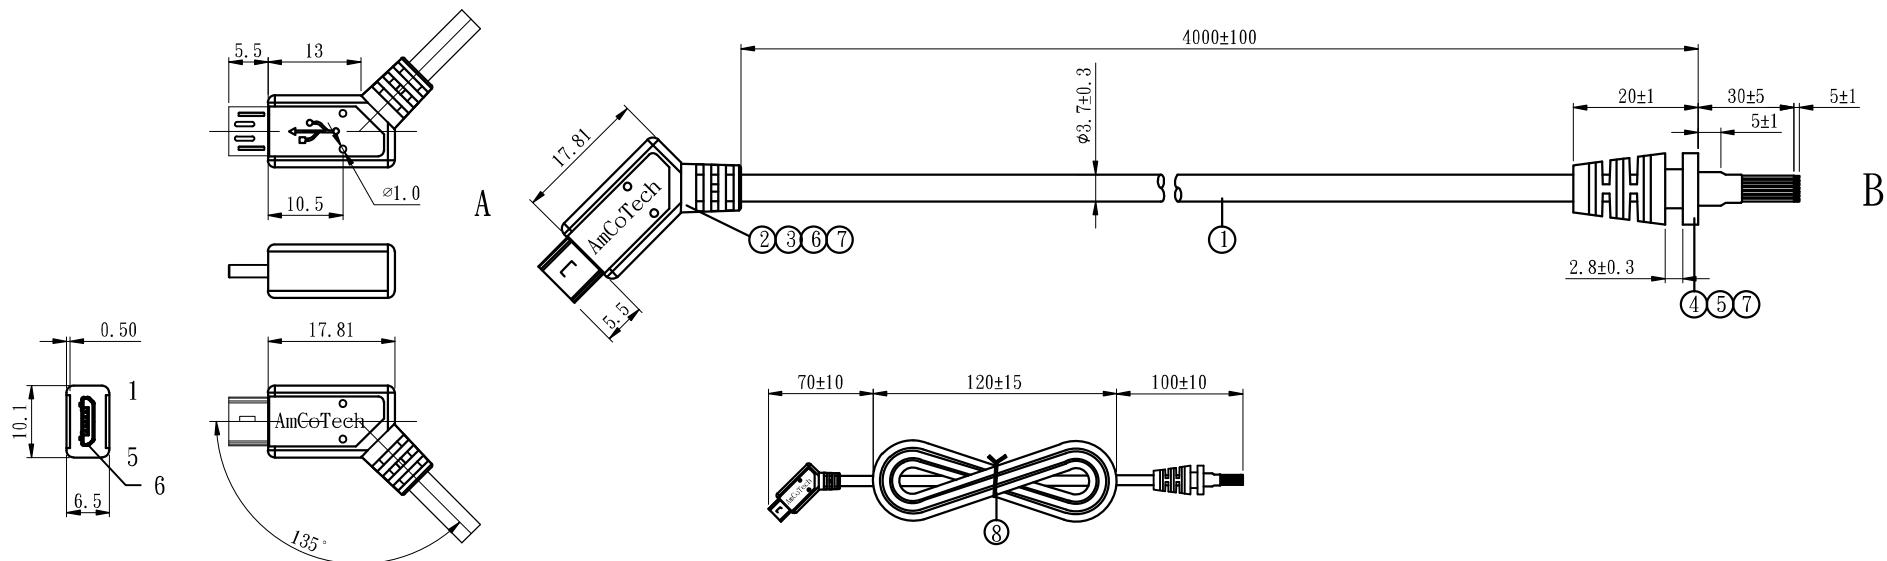

10	CARTON	1	52.5*33*23cm	628.5
9	WATERPROOF	1	650*950*0.04mm	62.85
8	TIES	1	150mm COLOR:BLACK	
7	OUTSIDE MOLDED	2	PVC 50P COLOR:GRAY	
6	INTERNAL MOLDED	1	PE	
5	TUBE	1	φ4.0*10mm COLOR:BLACK	
4	TUBE	1	φ1.0*30mm COLOR:BLACK	
3	TUBE	1	φ1.0*8mm COLOR:BLACK	
2	CONNECTOR	1	plug: Micro USB 5P B type plug plated gold cover nickel	
1	CABLE	1	Cable: (5C+1): Grey PVC Jacket 3.7dia. White/Green:0.85dia & twisted (copper-wire:0.12/7 brass plated tin & stranded and cover HDPE). Black/Yellow/Red: 0.65dia(copper-wire:0.12/7 brass plated tin & stranded and cover HDPE). Drain wire(bare copper wire:0.12/4)+AEB(0.12/4) UL2725 (VER:2.0)	33.7
NO	P/NAME	Q'TY	DESCRIPTION	WEIGHT UNIT: g

PIN ASSIGNMENT:

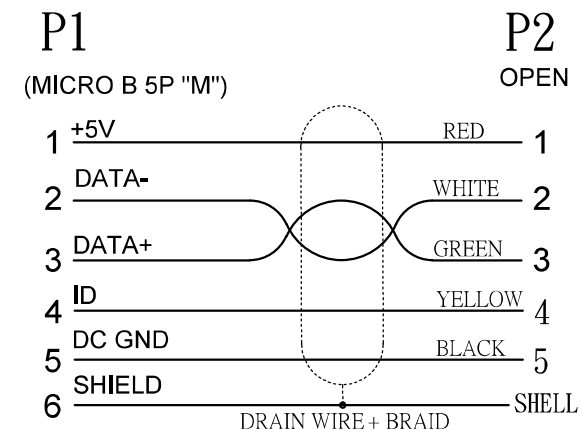

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X ± 0.30
X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

MIBX1-5BA0028GESR-M4M-LF

SERIES

5 PIN B TYPE
ANGLE

SR

GRAY
28 AWG

MALE


400CM

LEADFREE

DESCRIPTION: MICRO USB BM TO OPEN(SR)

煜倫股份有限公司

www.morethanall.com

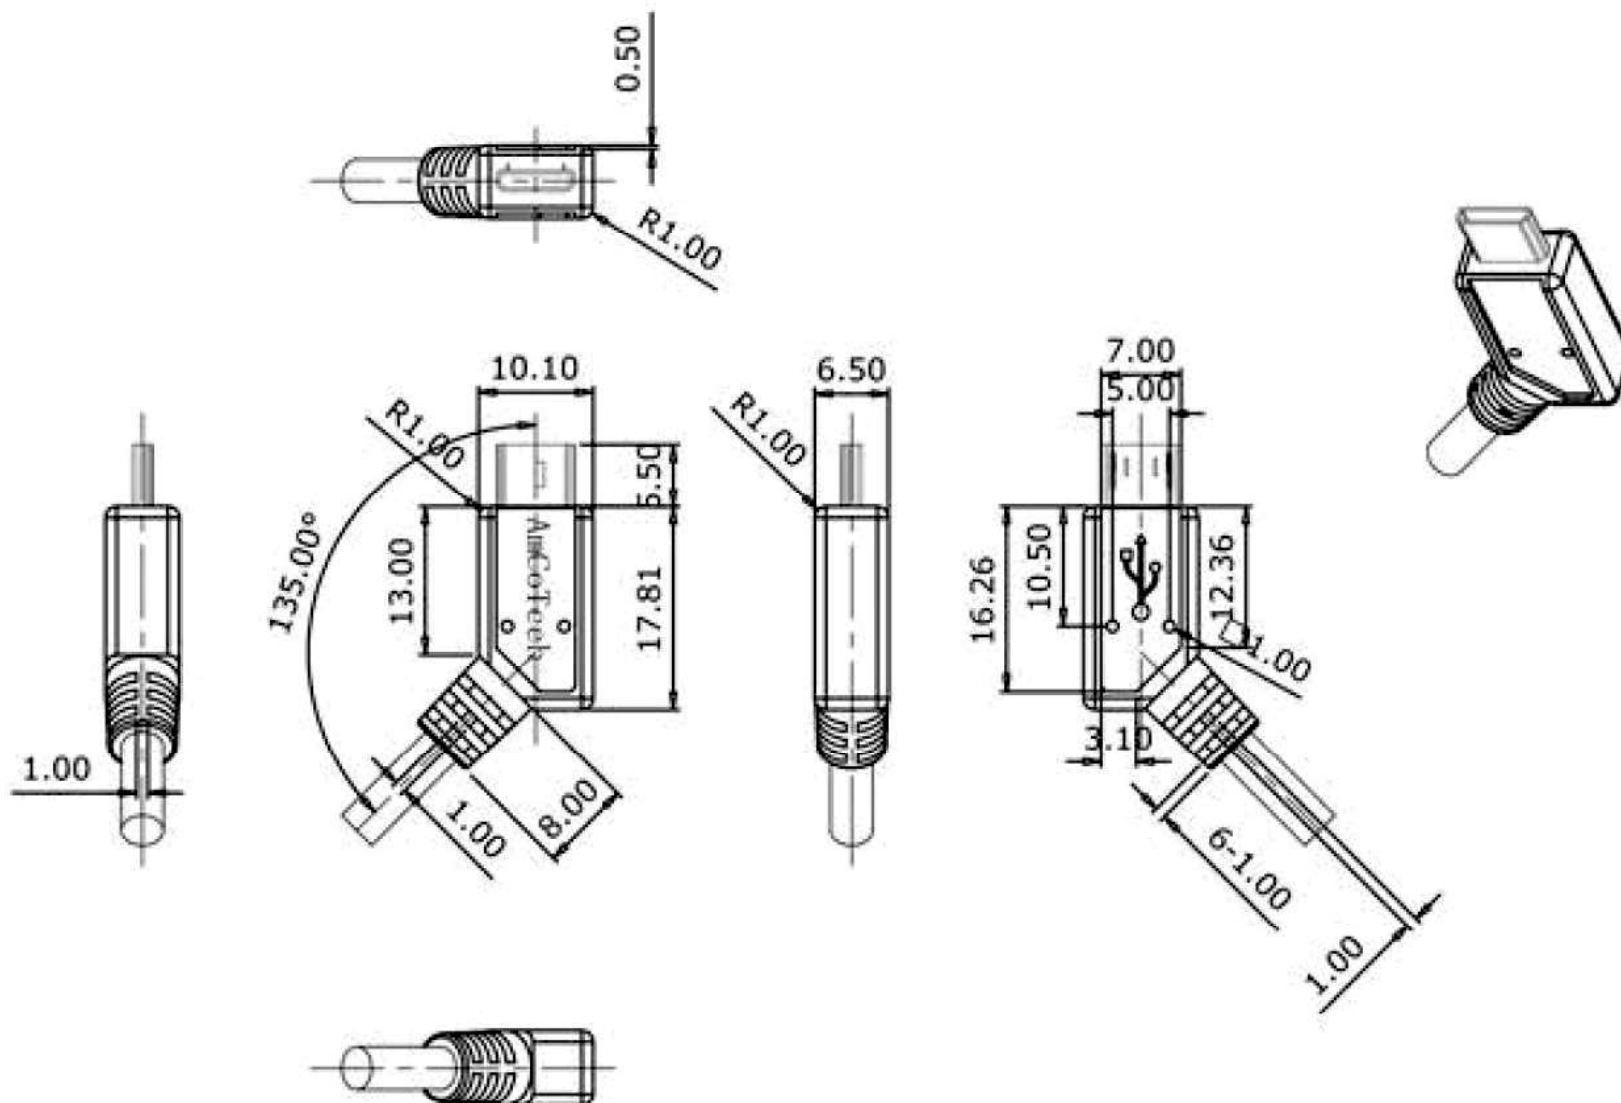

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

MIBX1-5BA0028GESR-M4M-LF

SERIES

5 PIN B TYPE
ANGLE

SR

GRAY
28 AWG


MALE

LEADFREE
400CM

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com

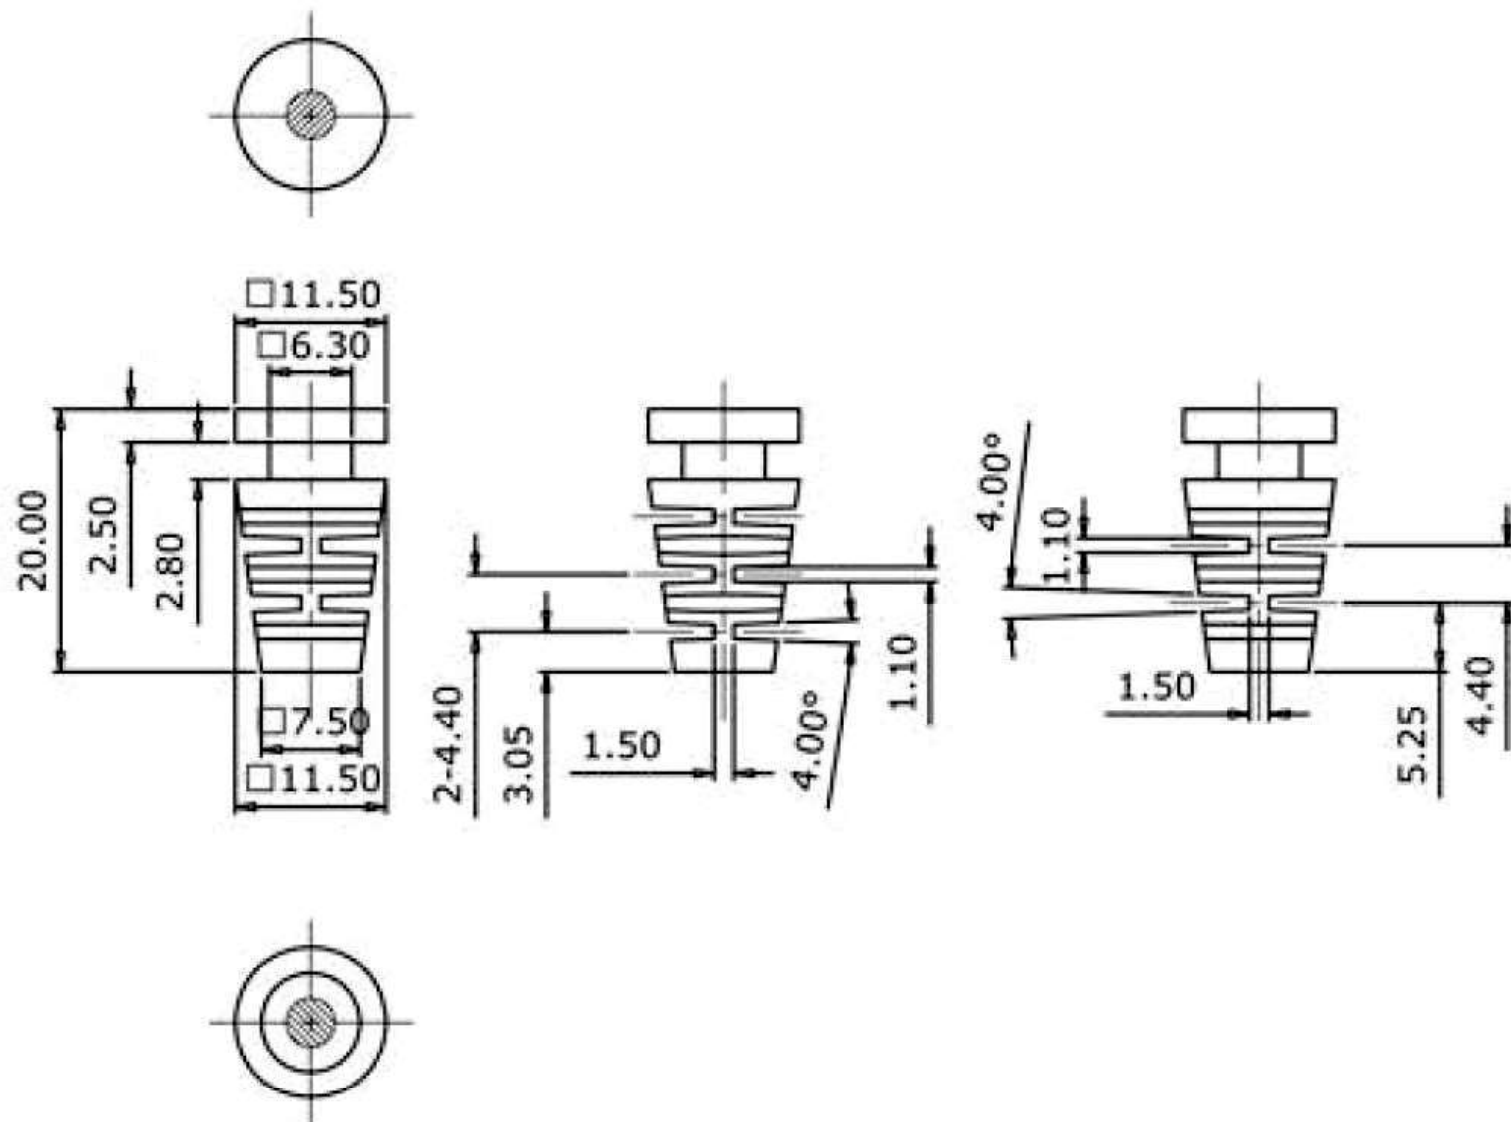

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

MIBX1-5BA0028GESR-M4M-LF

SERIES

5 PIN B TYPE
ANGLE

SR


GRAY
28 AWG

LEADFREE
400CM
MALE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com

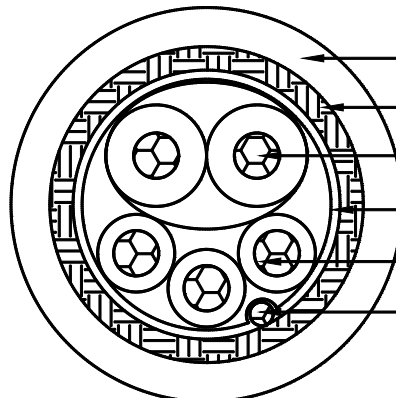SPECIFICATION		UL2725 28AWG/1P+28AWG/3C+AL/MY+DW+BRAID+JACKET		CROSS SECTION			
ITEM		SPECIFICATION		 JACKET BRAID 28AWG/1P AL/MY 28AWG/3C DW			
CONDUCTOR	AWG	28AWG/1P	28AWG/3C				
	MATERIAL	TINNER COPPER	TINNER COPPER				
	COND.SIZE	7/0.127mm	7/0.127mm				
INSULATION	AVG.THICK	0.23mm	0.13mm				
	MATERIAL	HD-PE	HD-PE				
	OD	0.85±0.05mm	0.65±0.05mm				
SHIELD	MATERIAL	AL/MY (Face outside)					
	COVERAGE	100%					
	OVERLAP	25%					
DRAIN	MATERIAL	BARE COPPER					
	COND.SIZE	7/0.12mm					
BRAID	MATERIAL	AL-MG(铝镁合金丝)					
	COVERAGE	75%					
	COND.SIZE	16/4/0.12mm					
JACKET	AVG.THICK	0.50mm					
	MATERIAL	80℃ 70P/PVC					
	COLOR	BEIGE/HALF MATT (CUL14162/WARE GRAY 2C)					
	OD	3.70±0.10mm					
				MARKING			
				E238846  AWM 2725 80℃ 30V VW-I			
				CHINGLUNG			
				PRINTING COLOR		BLACK	
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTIES		APPROVED		CUSTOMER	
1.Rating:TEMP 80℃ VOLTAGE 30V				CHECKED		REV	160510002
2.Conductor Resistance:AT20℃ MAX 28AWG:237.25Ω/km				DRAWING	Liulei	DATE	10-May-16