



包裝方式: 單PCS八字理线, 200PCS袋.



PIN OUTS

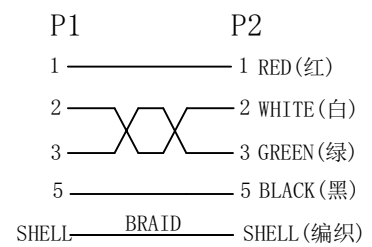

ELECTRONIC TEST CONDITION:
 100% OPEN SHORT & MISWIRE TEST.
 CONDUCTIVE RESISTANCE: 2Ω/MAX
 INSULATION RESISTANCE: 20MΩ/MIN. AT DC 300V

PART LIST: 本产品均符合"ROHS"环保标准, 用的材料均为相当品。

4	OUTER MOLDED: 45PVC BLACK.		KG/K
3	MICRO USB M : 5P GOLD CONNECTOR, NICKEL PLAIED SHELL, PLASTLC: BLACK.	1	PCS
2	MICRO USB F : 5P GOLD CONNECTOR, NICKEL PLAIED SHELL, PLASTLC: BLACK.	1	PCS
1	CABLE: UL2725 28AWG*1P+28AWG*2C+AL+B. OD: 3.5MM COLOR: BLACK.	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

MIBX2-5B5B28-Exxx-LF
 SERIES
 LEADFREE
 10C: 100mm
 15C: 150mm
 MALE TO FEMALE
 28 AWG
 5 PIN TO 5 PIN B TYPE

DESCRIPTION: USB MICRO F TO MICRO M 5P CABLE BLACK