


ELECTRONIC TEST:

1. 100% TEST,(Open,Short,Miss Wire).
2. Conduct Resistance: 5 Ω / max.
3. Insulation Resistance: 10M Ω /min.
4. Hi-Pot: 300v /10ms.

Packing

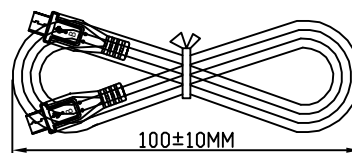

PIN OUTS

P1	P2
1	1 RED 28AWG
2	2 WHITE 28AWG
3	3 GREEN 28AWG
4	4 BLACK 28AWG
SHELL	BRAID SHELL

3	PVC : 45P BLACK COLOR.			KG/K
2	MICRO USB:5P GOLD CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:BLACK. MISB-PS-5B-LF		2	PCS
1	CABLE:UL2725 28AWG*1P+28AWG*2C+AB OD:3.5MM CABLE: BLACK JACK.		1.0	M
ITEM	STANDARD SPECIFICATION		Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

MIBX2-5B5B28-M1M-LF

SERIES

LEADFREE

1000mm
MALE TO MALE
28 AWG
5 TO 5 PIN B TYPE

DESCRIPTION: MICRO 5P B/M TO MICRO 5P B/M CABLE BLACK L= 1000MM