



PIN OUT

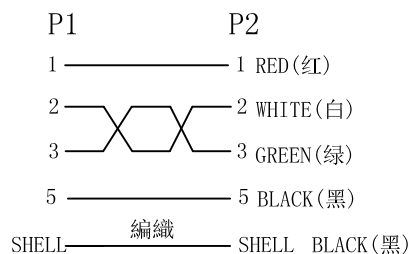

包装方式: 单PCS理线. 10PCS/扎. 100PCS/袋.



ELECTRONIC TEST CONDITION:
100% OPEN SHORT & MISWIRE TEST.
CONDCTIVE RESISTANCE:2Ω/MAX
INSULATION RESISTANCE:20MΩ/MIN.AT DC 300V

PART LIST:本产品均符合"ROHS"环保标准, 用的材料均为相当品。

ITEM	STANDARD SPECIFICATION	Q' TY	UNIT
3	黑色PVC 45P外模料		KG/K
2	MICRO USB:5P GOLD 1U" CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:BLACK	2	SET
1	CABLE: UL2725 28AWG*1P+28AWG*2C+AB OD:3.5MM 黑色外被 L=1500MM.	1	PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBX2-5B5B28-M1M5-LF

SERIES

LEADFREE
1500mm
MALE TO MALE
28 AWG
5 PIN TO 5 PIN B TYPE

DESCRIPTION: USB MICRO 5P 双头 CABLE BLACK L=1500MM