


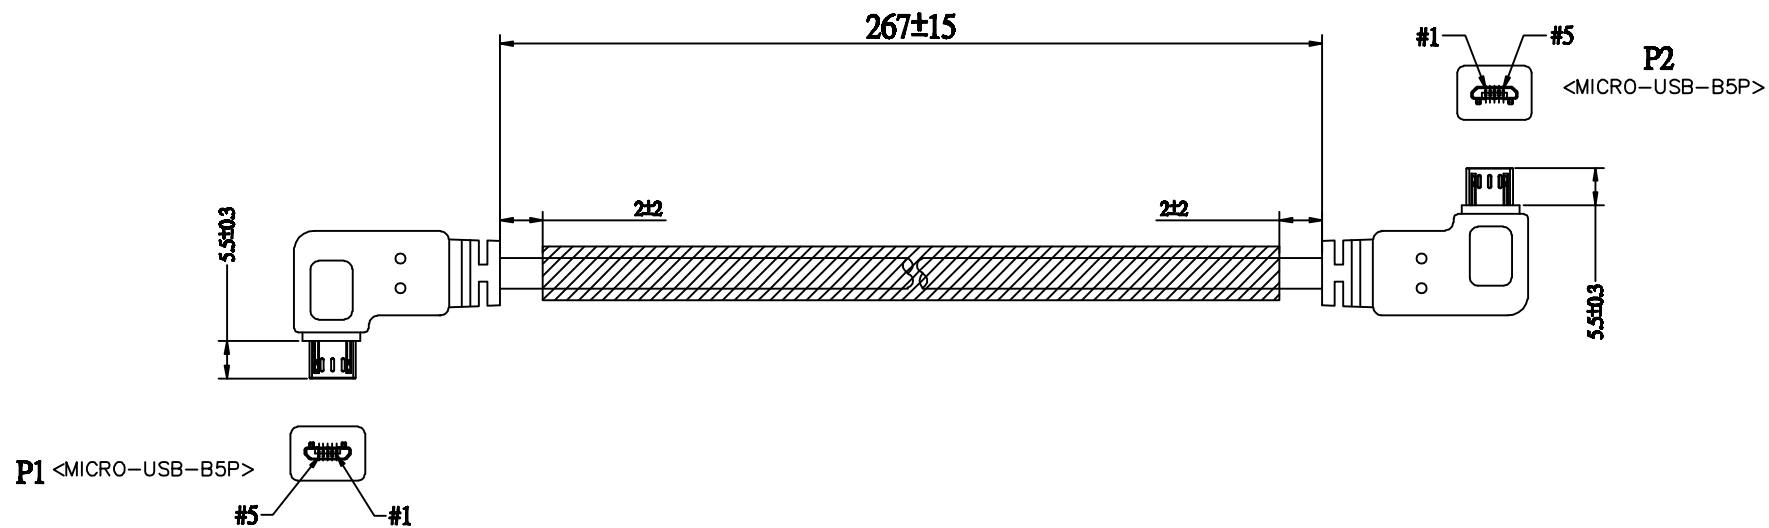

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	3
3	GREEN	2
5	BLACK	5
S	BRAID	S

NO	PART NO.	DESCRIPTION	QTY	UNIT
3	TUBE	TUBE-HT-OD: 4.5MM	3.0	G
2	CONNECTOR	MICRO-USB-B-5PIN<BK> 成型式	2	SET
1	CABLE	28*1P+26*2C+AB,BK10,OD: 4.0MM UL2725<REV: 2.0>	0.33	M

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

MIBX2-5BR5BRBS2628-M26C7

SERIES

267mm


MALE TO MALE

26.28 AWG

BOTH SIDE

5 PIN B TYPE 90° TO 5 PIN B TYPE 90°

DESCRIPTION: **MICRO USB B TYPE M/M L:267mm**

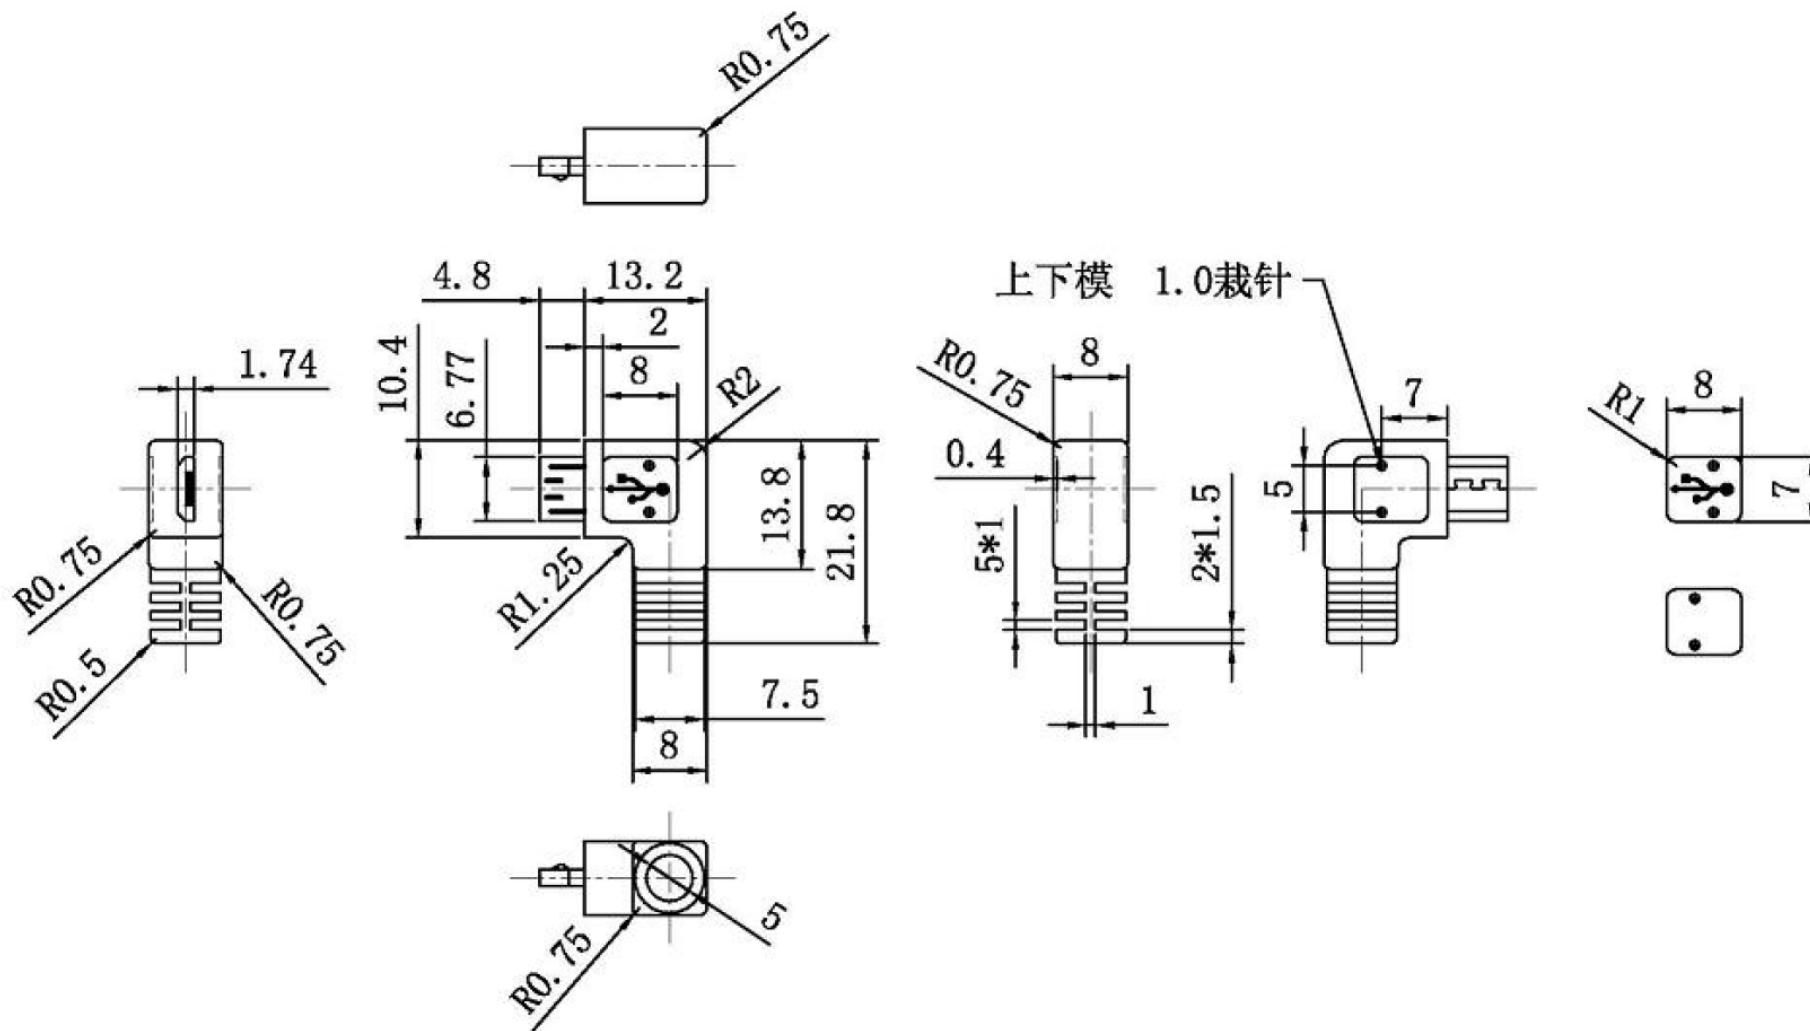

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBX2-5BR5BRBS2628-M26C7

SERIES

267mm

MALE TO MALE

26.28 AWG

BOTH SIDE

5 PIN B TYPE 90° TO 5 PIN B TYPE 90°

DESCRIPTION: MICRO USB B TYPE M/M L:267mm