


SPECIFICATIONS:

CONTACT RESISTANCE—<3M Ω
 INSULATION RESISTANCE—>1G Ω
 DIELECTRIC STRENGTH—1500V/DC
 LIFE TIME(MATING CYCLES)>1000

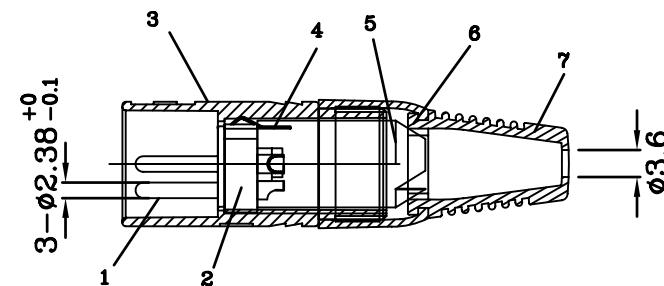

A-A SECTION

7	PVC-BLACK
6	POM-BLACK
5	POM-BLACK
4	BRASS-NICKEL PLATED
3	ZINC
2	PBT-BLACK
1	BRASS
	MATERIAL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIC-PA-04-LF
 SERIES T LEADFREE
 04WAY
 ASSEMBLY
 MALE

DESCRIPTION: