

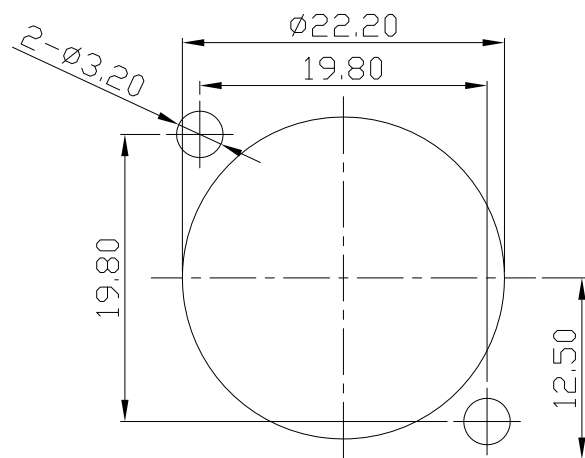
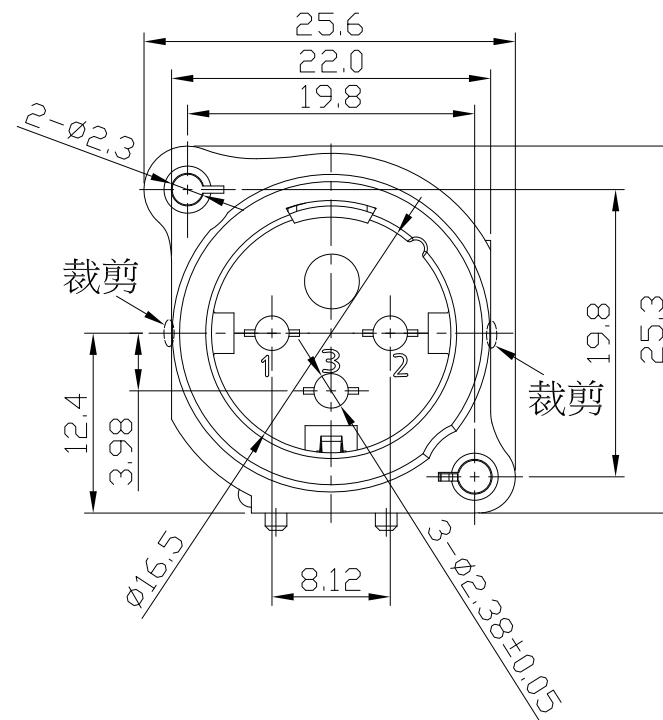


P.C.B. LAYOUT(±0.1)
(TOP VIEW)

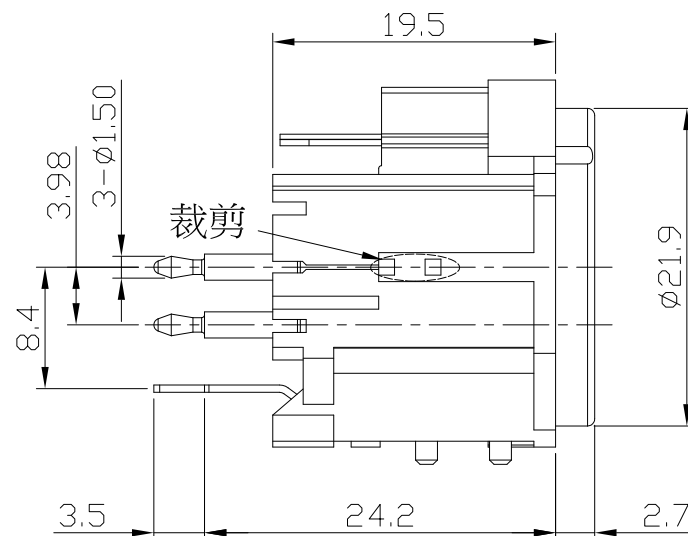

PANEL CUT OUT
(FRONT SIDE)

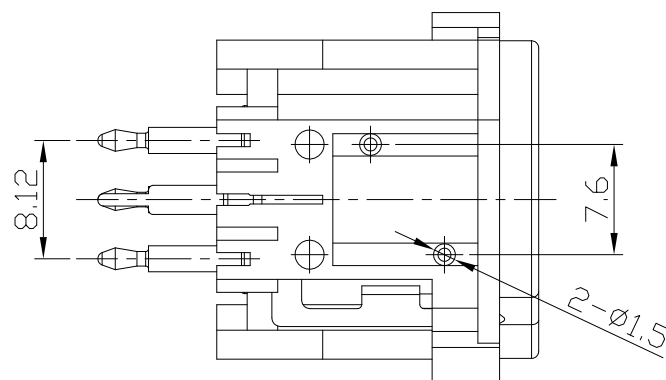

Recommend the use of screws :
M2.5~M3.0

4	SLEEVE	1	P. B. S	Ni
3	PIN	3	BRASS	Au
2	LATCH LOCK	1	SK7	Ni
1	BODY	1	NYLON	BLACK
NO	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIC-PD-03-LF

SERIES | LEADFREE
03 WAY
DIP 180°
MALE

DESCRIPTION: