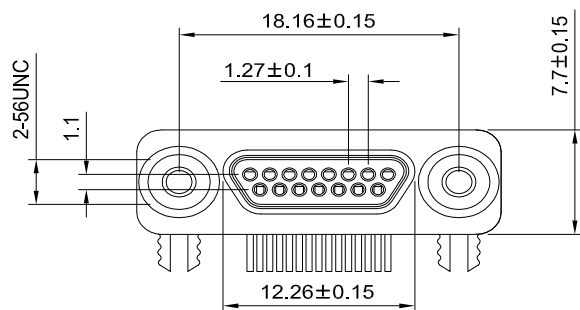


ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING: 1 AMPERE
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
CONTACT RESISTANCE: 25 MILLIOHMS MAX.

MATERIALS





CONTACTS: PHOSPHOR BRONZE
INSULATOR: THERMOPLASTIC 94V-0
SHELL: COLD ROLLER STEEL

FINISHES

CONTACT: 15 μ " MIN. GOLD ON MATING END;
120 μ " MIN. TIN-LEAD ON TERMINATION END;
ALL UNDERPLATED 50 μ " MIN. NICKEL
SHELL: 120 μ " MIN. NICKEL OR BRIGHT TIN OVER
80 μ " MIN. COPPER

ENVIRONMENT

OPERATION TEMPERATURE: -55°C TO + 85°C

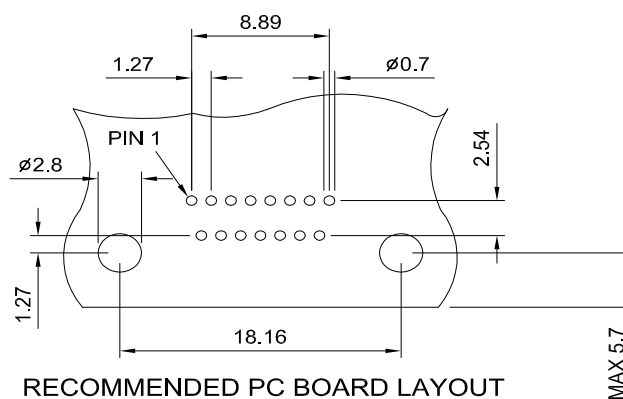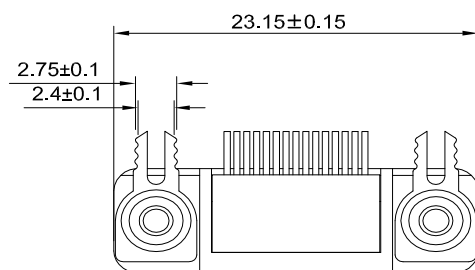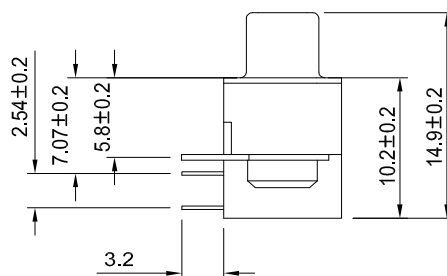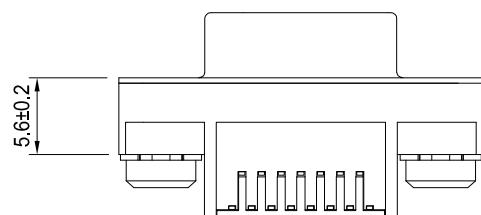

RECOMMENDED PC BOARD LAYOUT

(15 POSITION ONLY)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MID-PRN-15-LF
SERIES NUT DIP 90° MALE
LEADFREE
15 WAY

DESCRIPTION: Micro Miniature 15P Right Angle