
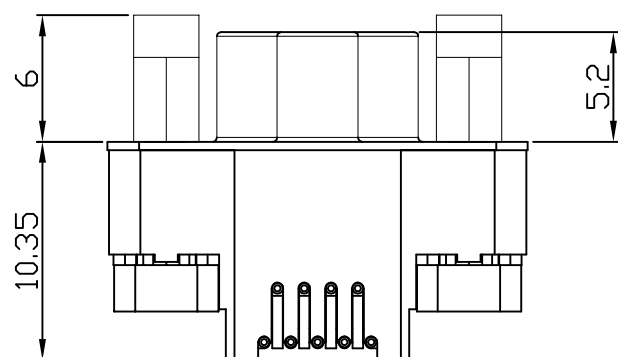
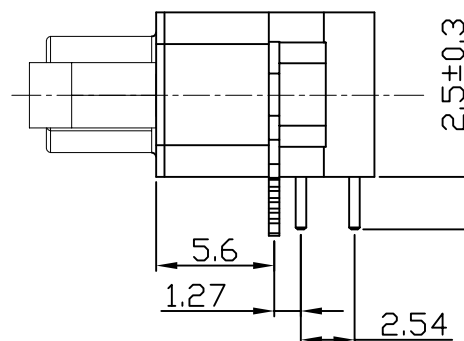


P/N	NUMBER OF PINS	A	B	C	D	E	F	G
MID-SRNJ-09	9	19.93	14.35	5.08	14.35	10.41	14.35	8.80
MID-SRNJ-15	15	23.75	18.16	8.89	18.16	14.22	18.16	12.60
MID-SRNJ-25	25	30.10	24.51	15.23	24.51	20.57	24.51	18.95

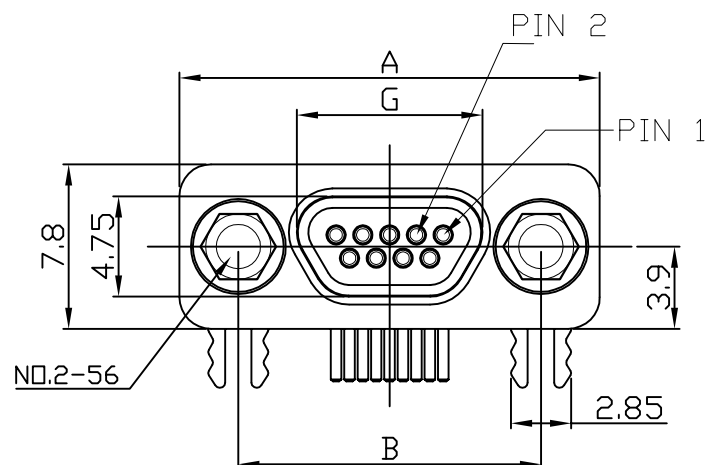

1. MATERIAL :

- 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : BRASS
- 1-3. FRONT SHELL : SPCC
- 1-4. SHELL : BRASS
- 1-5. GROUND : BRASS
- 1-6. SCREW : BRASS

2. FINISH :


- 2-1. CONTACT : GOLD 15u" ON CONTACT AREA
MATTE TIN 60u" ON SOLDER AREA
- 2-2. FRONT SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
- 2-3. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL
- 2-4. GROUND : NICKEL PLATED 60u" ~ 100u" OVER ALL
- 2-5. SCREW : NICKEL PLATED 60u" ~ 100u" OVER ALL

3. ELECTRICAL SPECIFICATION :


- 3-1. Rated current : 1A
- 3-2. Voltage : 30V AC

4. Environmental :

- 4-1. Operation Temperature : -40℃~+125℃

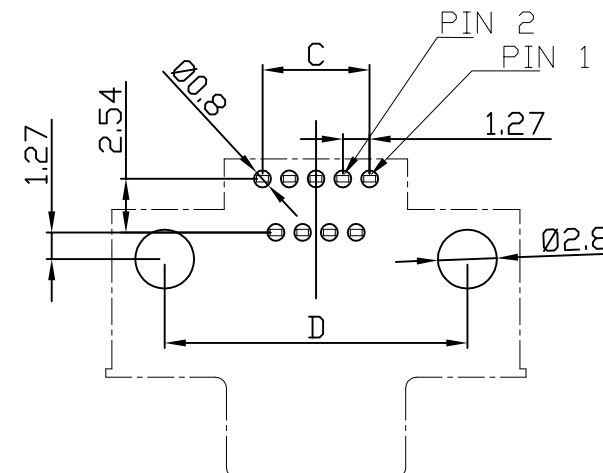

P.C.B. LAYOUT

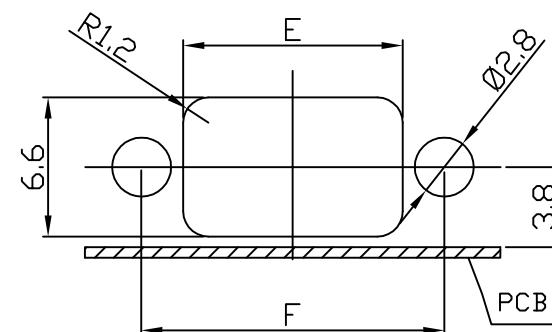

PANEL CUT-OUT

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ± 1°

ORDER INFORMATION

MID-SRNJ-xx-LF
SERIES
LEADFREE
09~25 WAY
JACKSCREW
NUT
DIP 90°
FEMALE

DESCRIPTION: MICRO D-SUB 9-25P(F) 板上90°帶螺絲