


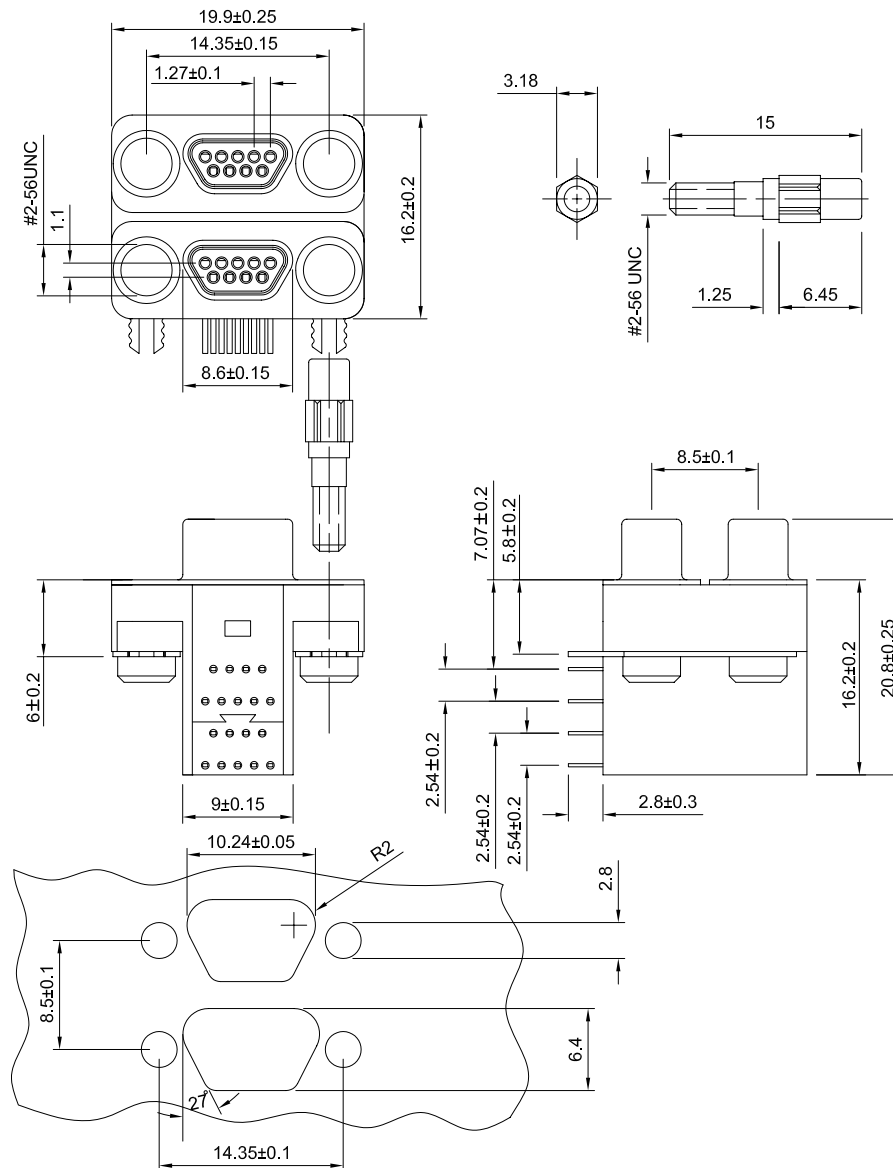

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING: 1 AMPERE
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
CONTACT RESISTANCE: 45 MILLIOHMS MAX.

MATERIALS

CONTACTS: COPPER ALLOY
INSULATOR: THERMOPLASTIC 94V-0
SHELL: COLD ROLLER STEEL


FINISHES

CONTACT: 15 μ " MIN. GOLD ON MATING END;
TIN ON TERMINATION END;
ALL UNDERPLATED NICKEL

SHELL: BRIGHT TIN OVER COPPER

ENVIRONMENT

OPERATION TEMPERATURE: -55°C TO + 85°C

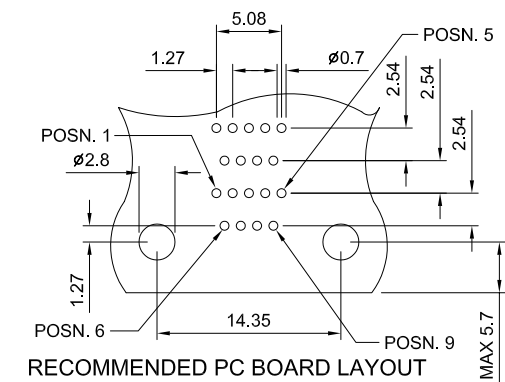

RECOMMENDED PC BOARD LAYOUT

(18 POSITION ONLY)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MIDB1-MR-0909-LF

SERIES LEADFREE
09 TO 09 WAY
DIP 90°
MALE

DESCRIPTION: Micro miniature dual port 9P right angle