



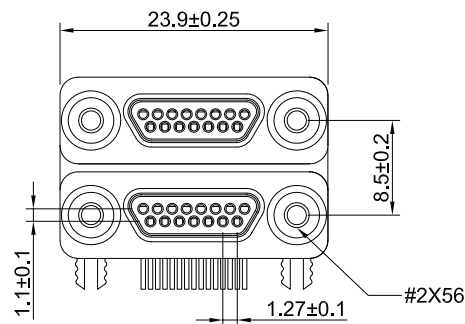
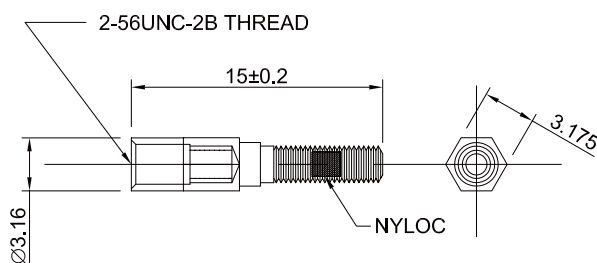


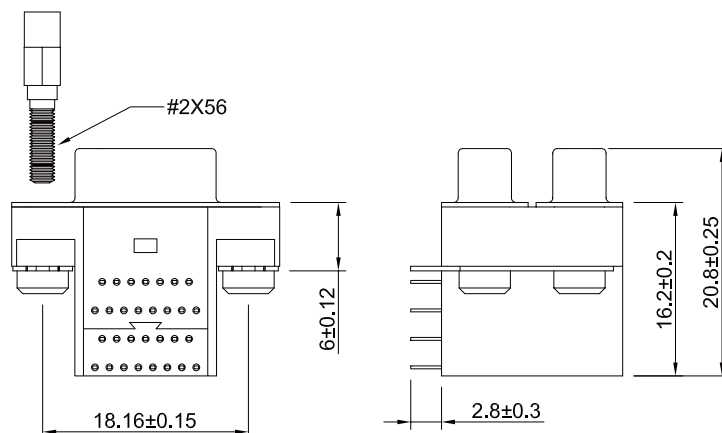

ELECTRICAL CHARACTERISTICS
 CONTACT CURRENT RATING:1AMPERE
 DIELECTRIC WITHSTANDING VOLTAGE:500 VAC
 INSULATION RESISTANCE:1000 MEGOHMS MIN.
 CONTACT RESISTANCE:45 MILLIOHMS MAX.
MATERIALS
 CONTACTS:PHOSPHOR BRONZE
 INSULATOR:THERMOPLASTIC 94V-0
 SHELL:COLD ROLLER STEEL
FINISHES
 CONTACT:15μ" MIN. GOLD ON MATING END;
 TIN-LEAD ON TERMINATION END;
 ALL UNDERPLATED NICKEL
 SHELL:BRIGHT TIN OVER COPPER
ENVIRONMENT
 OPERATION TEMPERATURE: -55°C TO + 85°C
NOTES
 1.MATERIAL:STEEL,NICKEL PLATED.
 2.SHIP WITH FOUR STAND-OFFS

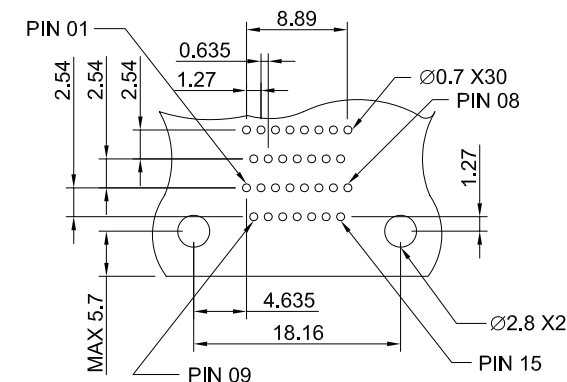

REFERRAL TORQUE = 2 kgf-cm ~ 2.5 kgf-cm

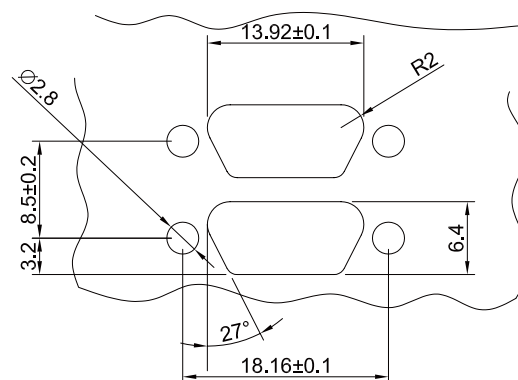

RECOMMENDED PC BOARD LAYOUT
 TOLERANCE:±0.05
 (30 POSITION ONLY)

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.25
 .XX ± 0.20
 .XXX ± 0.15
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIDB1-MR-1515-LF

SERIES LEADFREE
 15 TO 15 WAY
 DIP 90°
 MALE

DESCRIPTION: Micro Miniature Dual Port 15P Right Angle