

Features:

- Material: Phosphor bronze
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm

Specifications:


- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Ordering Information

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
MIF-FT-26	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
MIF-FT-20	Tin-plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.5

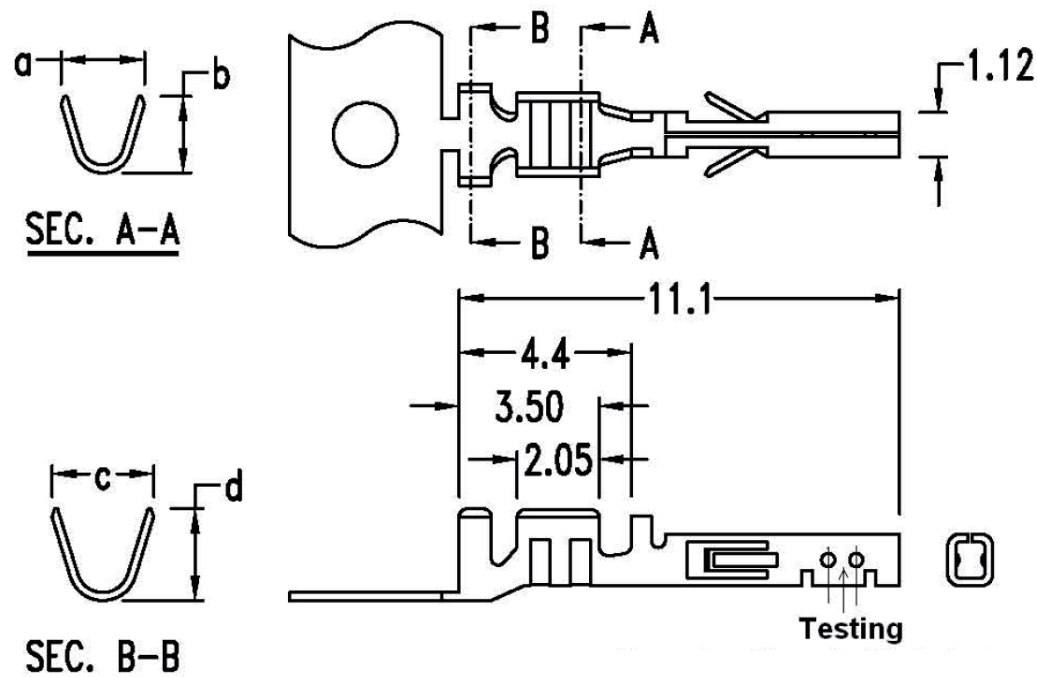

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MIF-FT-xx-LF
SERIES T LEADFREE
26:26 AWG
20:20 AWG
TERMINAL
FEMALE

DESCRIPTION: