

Features:

- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon
- Standard color: Black

Specifications:

Current rating:




Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Amps	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000mΩ Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2	3.0±0.08	6.85	7.21	10.9	6	15.0±0.15	18.85	19.21	22.9	10	27.0±0.20	30.85	31.21	34.9
3	6.0±0.10	9.85	10.21	13.9	7	18.0±0.15	21.85	22.21	25.9	11	30.0±0.20	33.85	34.21	37.9
4	9.0±0.10	12.85	13.21	16.9	8	21.0±0.15	24.85	25.21	28.9	12	33.0±0.20	36.85	37.21	40.9
5	12.0±0.10	15.85	16.21	19.9	9	24.0±0.15	27.85	28.21	31.9					

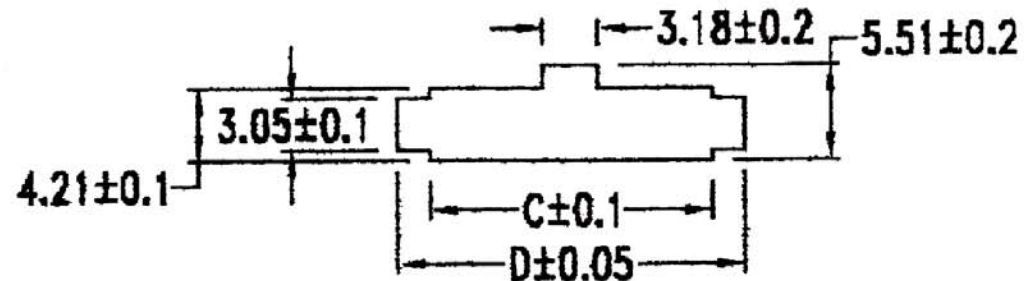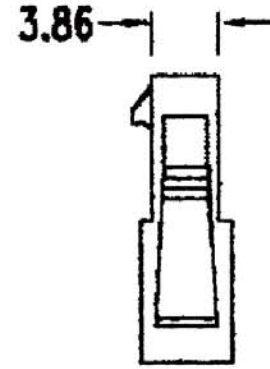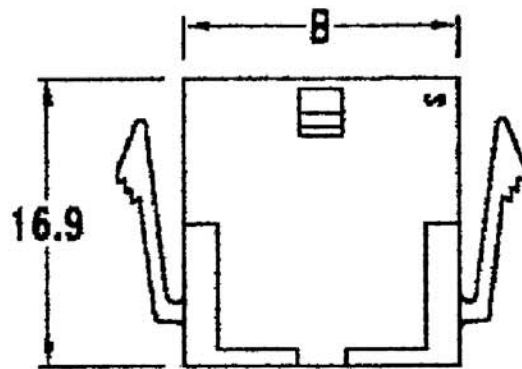

PANEL OPENING [Recommended panel thickness: .062" (1.57mm)]

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MIF-PH-1Xxx-LF
SERIES | LEADFREE
| 1X02:02WAY
| 1X12:12WAY
HOUSING
MALE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com