

Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon 66
- Standard color: Black
- Recommended panel thickness: 1.57mm

Specifications:



- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000M Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.
(carry rated current load)
- Ambient temperature range: -25°C ~ 85°C

Dimensional Information

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2		4.0	4.21	7.90	14	18.0	22.0	22.20	25.88
4	3.0	7.0	7.21	10.90	16	21.0	25.0	25.20	28.88
6	6.0	10.0	10.21	13.89	18	24.0	28.0	28.20	31.88
8	9.0	13.0	13.21	16.89	20	27.0	31.0	31.22	34.87
10	12.0	16.0	16.21	19.89	22	30.0	34.0	34.22	37.87
12	15.0	19.0	19.21	22.89	24	33.0	37.0	37.22	40.87

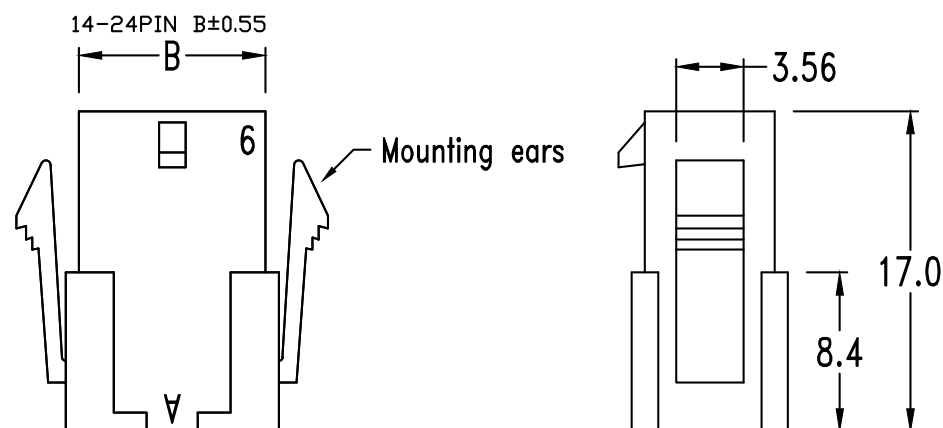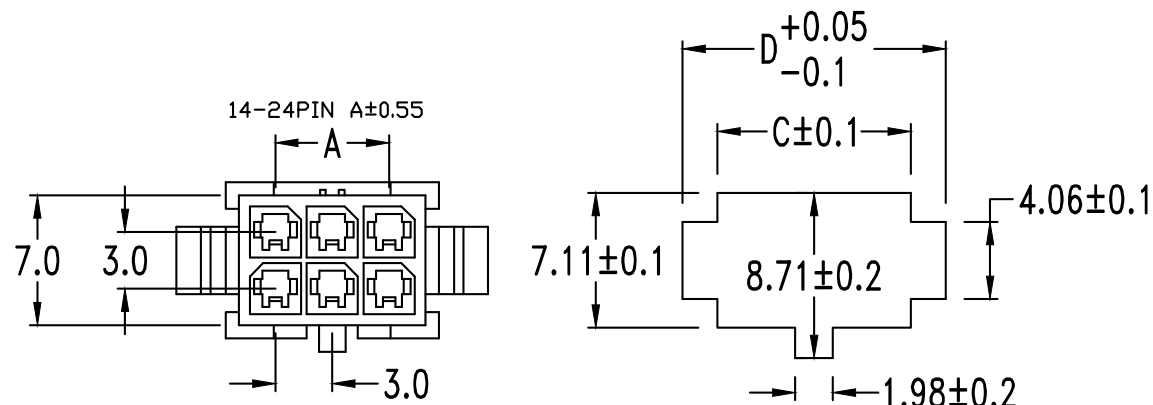

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE _____

SIZE A4

PROJECT

TOLERANCES ARE

X. $\pm$
 .X $\pm$ 0.40
 .XX $\pm$ 0.25
 .XXX $\pm$ 0.08
 ANG $\pm$

照片框

ORDER INFORMATION

MIF-PH-2Xxx-LF

SERIES

— LEADFREE

2X01:02WAY

2X12:24WAY

HOUSING

MALE

DESCRIPTION: .118"(.300mm) Dual Row Plug Housing