

Features:

- 2 ~ 12 circuits available
- Material: UL 94V-0 nylon
- Standard color: Black

Specifications:

- Current rating:


Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000m Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0±0.08	6.85	6	15.0±0.15	18.85	10	27.0±0.20	30.85
3	6.0±0.10	9.85	7	18.0±0.15	21.85	11	30.0±0.20	33.85
4	9.0±0.10	12.85	8	21.0±0.15	24.85	12	33.0±0.20	36.85
5	12.0±0.10	15.85	9	24.0±0.15	27.85			

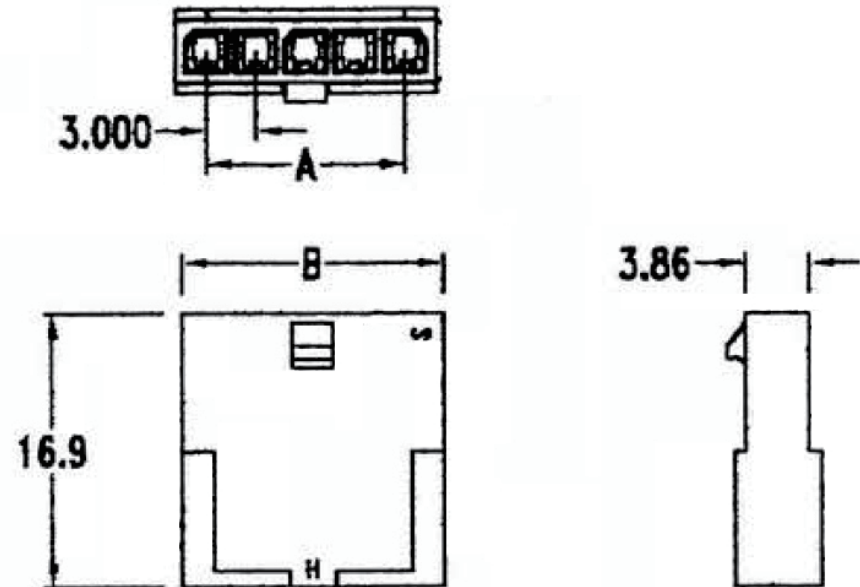

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION



DESCRIPTION: