
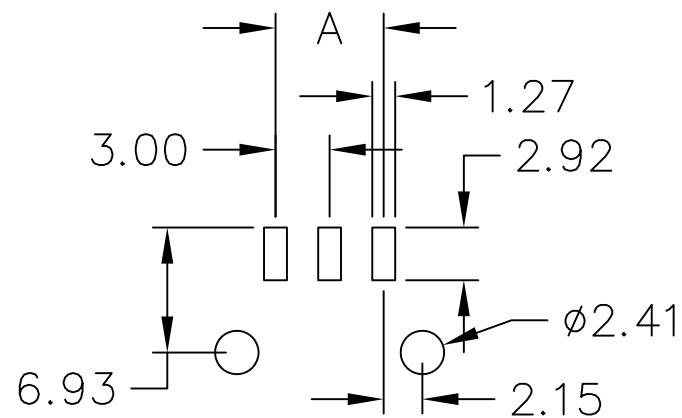
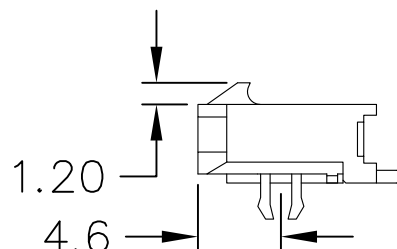
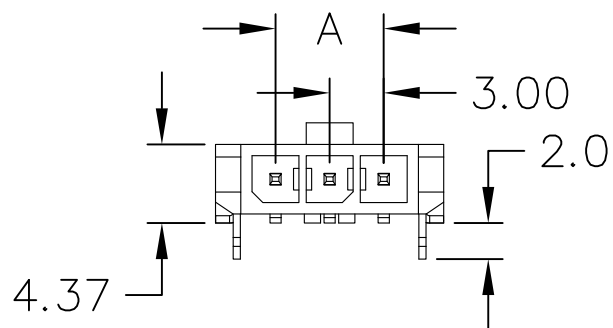





Recommended P.C.B Layout

## Features:

- 2 ~ 12 circuits available
- Material: LCP
- Tin-plated brass pin

## Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

| POLES | DJIM A | DIM B |
|-------|--------|-------|
| 2     | 3.0    | 9.65  |
| 3     | 6.0    | 12.65 |
| 4     | 9.0    | 15.65 |
| 5     | 12.0   | 18.65 |
| 6     | 15.0   | 21.65 |
| 7     | 18.0   | 24.65 |
| 8     | 21.0   | 27.65 |
| 9     | 24.0   | 30.65 |
| 10    | 27.0   | 33.65 |
| 11    | 30.0   | 36.65 |
| 12    | 33.0   | 39.65 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MIF-PWZ-1Xxx-LF  
SERIES LEADFREE  
1X02:02WAY  
1X12:12WAY  
MALE CLIP  
90°SMT

DESCRIPTION: