
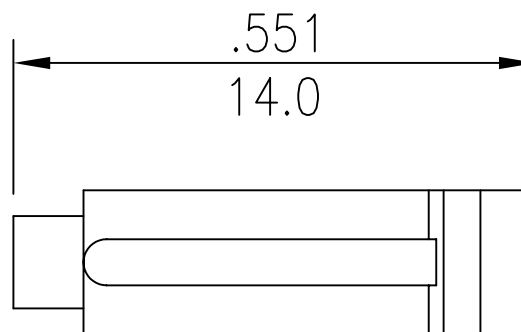


\* Material: Polyester, UL94V-0

### Specifications

- \* Current rating: 3A AC, DC
- \* Voltage rating: 250V AC, DC
- \* Temperature range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- \* Insulation resistance:  $1,000\text{M}\Omega$  min.
- \* Withstand voltage: 1,500V AC/minute

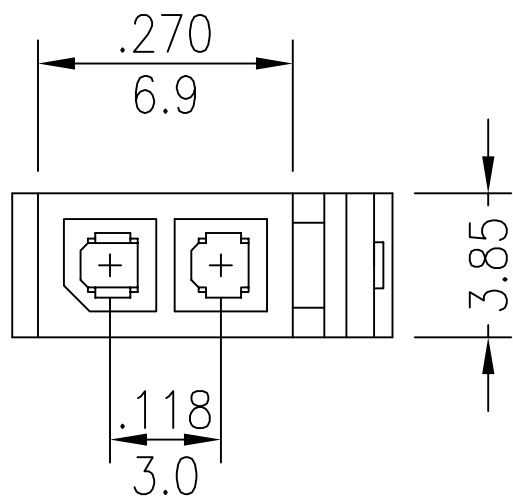

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

P PROJECTION

X.±

.X±

.XX±

.XXX±

ANG ±

照片框

ORDER INFORMATION

MIF-SH-2X01-LF  
SERIES | LEADFREE  
| 02WAY  
HOUSING  
FEMALE

DESCRIPTION: 3.0mm MICKO FIT