

Specifications:

Current rating:5.0Amps

Voltage rating:250V AC,DC

Contact resistance:10m ohm Max


Insulation resistance:1,000M ohm min.

Dielectric Withstanding:1,500V AC/Minute

Operating Temperature:-25°C ~ +105°C

Materials:

Insulator:High Temp. Plastic(UL94V-0)

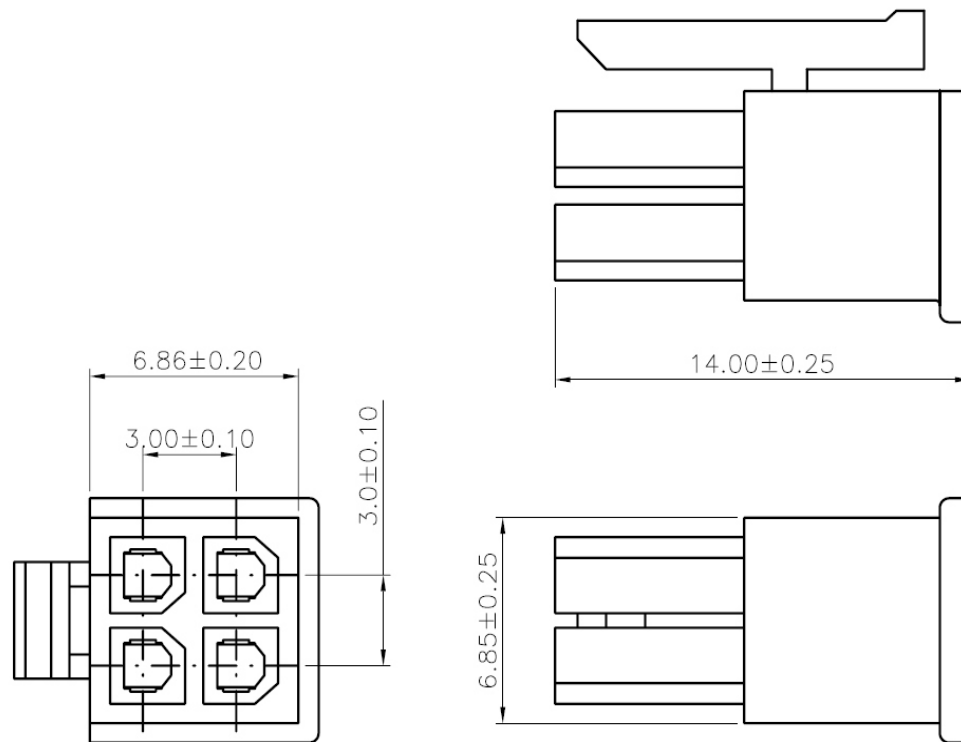

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIF-SH-2X02-LF
SERIES | LEADFREE
| 04WAY
HOUSING
FEMALE

DESCRIPTION: