

Specifications:

Current rating:5.0Amps

Voltage rating:250V AC,DC

Contact resistance:10m ohm Max



Insulation resistance:1,000M ohm min.

Dielectric Withstanding:1,500V AC For One Minute

Operating Temperature:-25°C ~ +105°C

Materials:

Insulator:High Temp.Plastic(UL94V-0)

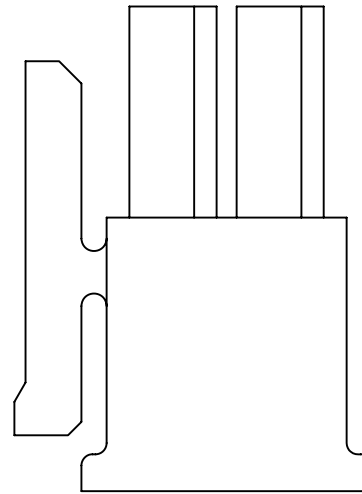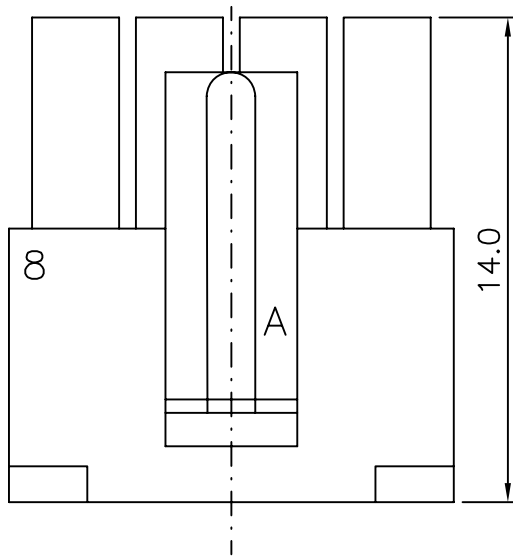

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

MIF-SH-2X04-LF  
SERIES | LEADFREE  
| 08WAY  
HOUSING  
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 3.0mm Pitch Receptacle Housing