

Features:




- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon
- Standard color: Black

Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000M Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.
(carry rated current load)

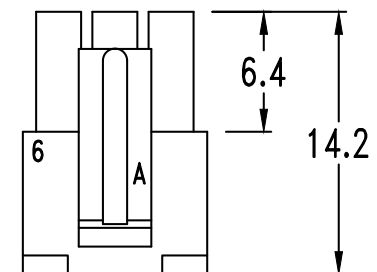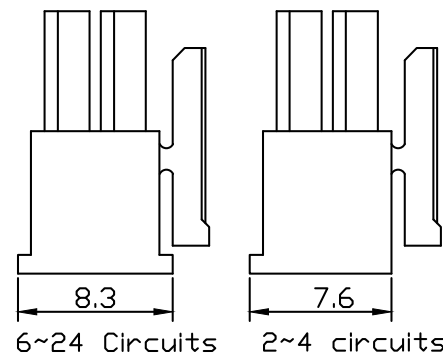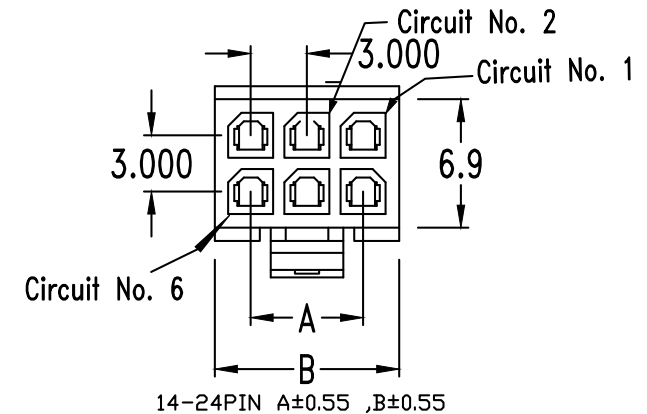

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		4.0	6	6.0	10.0	10	12.0	16.0	14	18.0	22.0	18	24.0	28.0	22	30.0	34.0
4	3.0	7.0	8	9.0	13.0	12	15.0	19.0	16	21.0	25.0	20	27.0	31.0	24	33.0	37.0

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.08
ANG $\pm$

照片框

ORDER INFORMATION

MIF-SH-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X12:24WAY
HOUSING
FEMALE

DESCRIPTION: