

P1

MIC-4P ϕ 16mm


P2

MX3.0-2*2PH

MIF2XLR-0404-A33C-LF
LEADFREE

RoHS Compliant

WIRING DIAGRAM

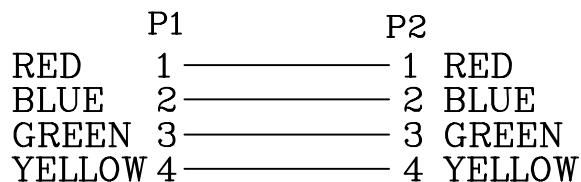

6				
5	TERMINAL	4	PCS	MX3.0-TP-FEMALE
4	HOUSING	1	PCS	MX3.0-2*2PH-MALE
3	TUBE	4	PCS	SHRINK TUBE ϕ 2.5*10mm #BK
2	CONNECTOR	1	PCS	MIC 4P JACK ϕ 16mm
1	CABLE	380	mm	UL2464 24AWG 4C OD:4.0mm #BLACK
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION



PART NO. MIF2XLR-0404-A33C

DWG NO. MIF2XLR-0404-A33C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X \pm 0.2
.XX \pm
.XXX \pm
AWG

DESCRIPTION: MIC 4P JACK/MX3.0-2*2PH/0.33M

AREA

REVISIONS

HK

DATE

煜倫股份有限公司