


NOTES:

- 100% OPEN,SHORT & MISWIRE TESE.
- CONDUCTIVE RESISTANCE:2Ω/MAX.
- INSULATION RESISTANCE:5MΩ/MIN.AT DC 200V

WIRING DIAGRAM

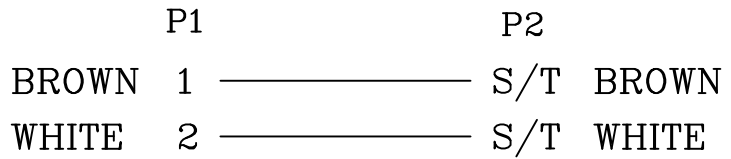

4	TUBE	1	PCS	HEAT SHRINK TUBE 6*10mm BLUE
3	HOUSING	1	PCS	MX3.0-1*2P-M
2	TERMINAL	2	PCS	MX3.0-TP-F
1	CABLE	1	PCS	NONUL 22AWG*2C(WHITE,BROWN) OD:3.5mm #GRAY L:205mm
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION



PART NO. MIFX1-0200HTLB-F21C	
DWG NO. MIFX1-0200HTLB-F21C	
FILE NO.	DRAWING BY
UNIT / mm	SCALE 1:1

RoHS Compliant

CHECKED BY CY	DRAWING BY
PROJECTION	

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:	3.0 MICRO FIT 2P/TIN L:210mm GRAY			
AREA	REVISIONS	HK	DATE	

煜倫股份有限公司