


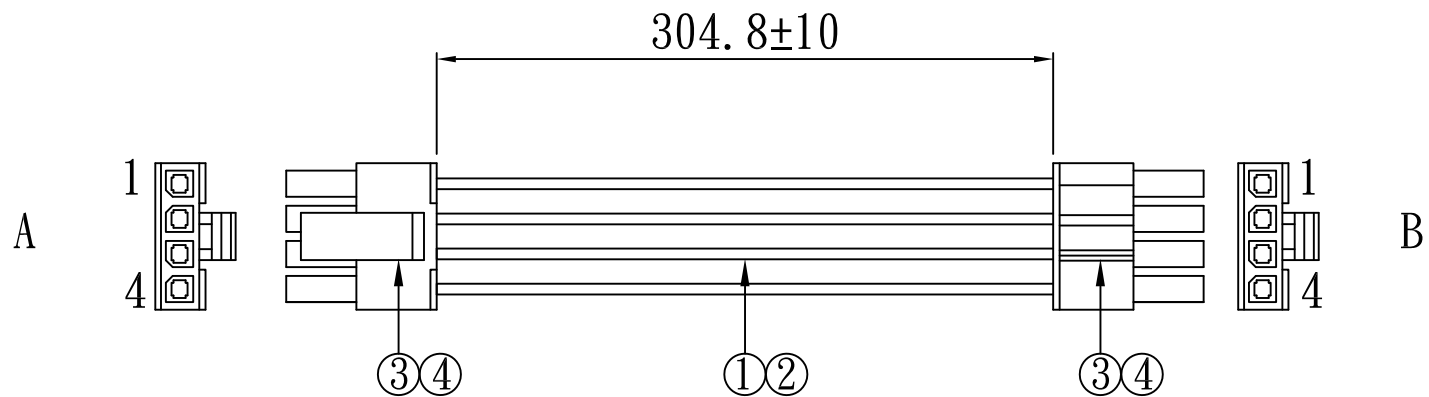

A	Color	B
1	Yellow	1
2	Black	2
3	Black	3
4	Yellow	4

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1007 #20 Yellow	2PCS	E108485
	WIRE:	UL1007 #20 Black	2PCS	E108485
2	HOUSING:	MIF-SH-1X04	2PCS	E115256
3	TERMINAL:	MIF-FT-20	8PCS	
4				
5				
6				
7				

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIFX2-040420-F12N-LF

SERIES

LEADFREE

304.8mm

FEMALE TO FEMALE

20 AWG

04 TO 04 WAY

DESCRIPTION: CABLE ASSY