


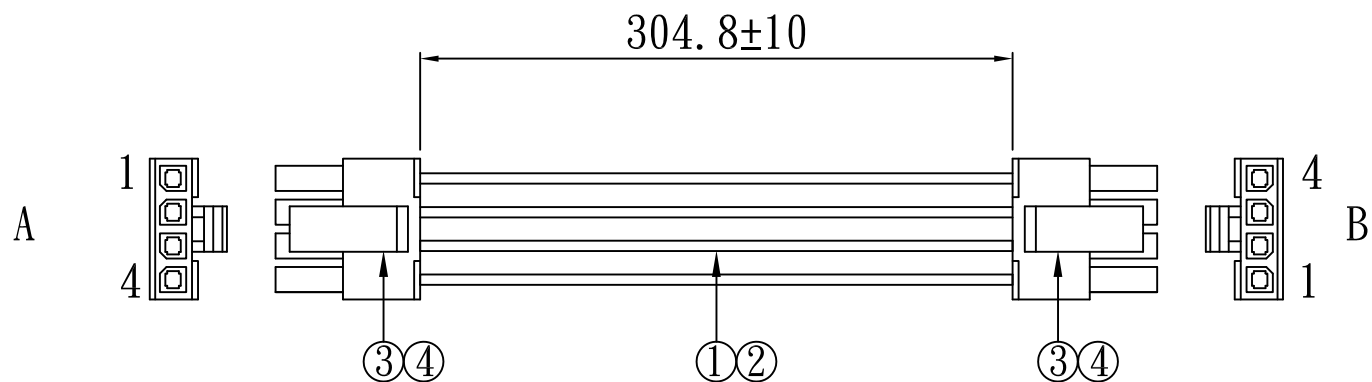

A	COLOR	B
1	YELLOW	4
2	BLACK	3
3	BLACK	2
4	YELLOW	1

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1007 #20 YELLOW	2PCS	E108485
	WIRE:	UL1007 #20 BLACK	2PCS	E108485
2	HOUSING:	MIF-SH-1X04	2PCS	E115256
3	TERMINAL:	MIF-FT-20	8PCS	
4				
5				
6				
7				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MIFX2-040420W2-F12N-LF

SERIES

WIRE



20 AWG
04 TO 04 WAY

LEADFREE

304.8mm

FEMALE TO FEMALE

DESCRIPTION: CABLE ASS"Y

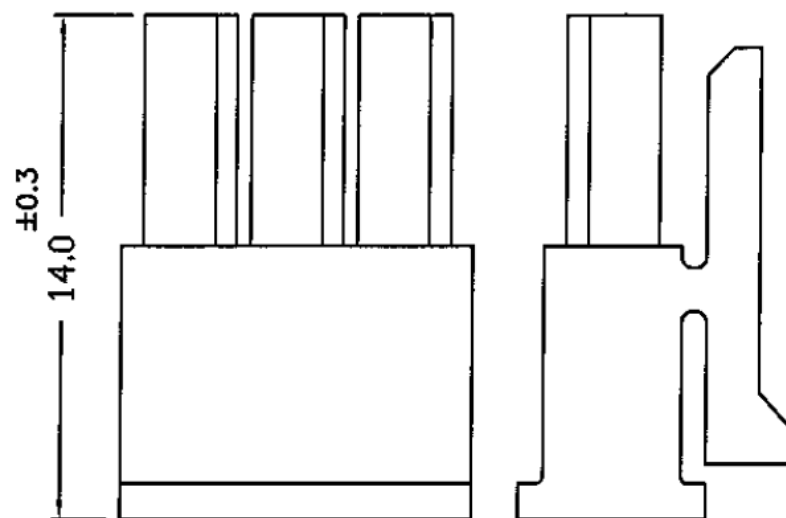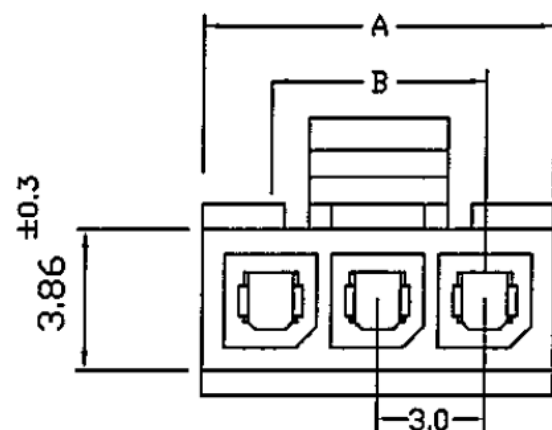

MAT'L: NYLON 66 UL94V-0
CURRENT RATING: 5A AC,DC
VOLTAGE RATING: 250V AC,DC

PART NO.	A	B
MIF-SH-1X02	6.85	3.0
MIF-SH-1X03	9.85	6.0
MIF-SH-1X04	12.85	9.0
MIF-SH-1X05	15.85	12.0
MIF-SH-1X06	18.85	15.0
MIF-SH-1X07	21.85	18.0
MIF-SH-1X08	24.85	21.0
MIF-SH-1X09	27.85	24.0
MIF-SH-1X10	30.85	27.0
MIF-SH-1X11	33.85	30.0
MIF-SH-1X12	36.85	33.0

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

MIF-SH-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X12:12WAY
HOUSING
FEMALE

DESCRIPTION: 3.00mm PITCH HOUSING-RECEPTACLE, SINGLE ROW, MICRO-FIT