
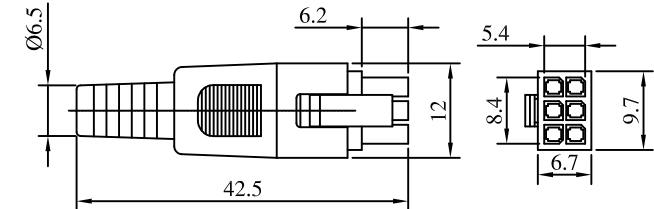


接線圖

P1	顏色	P2
1	白	1
2	黃	2
3	綠	3
4	藍	4
5	紅	5
6	黑	6

繞線方式:



TOLERANCE ±0.5 UNLESS SPECIFIC

檢測標準:

耐壓測試: 1mA 800V AC/1秒

絕緣阻抗: 2M ohm

導通阻抗: 10 ohm

4.	Terminal	12		MIF-FT-22
3.	CABLE	1		UL2464 #26*6C OD:Ø5
2.	MOLD	2	D-68	PVC 黑色
1.	PLUG	2		MIF-SH-2X03
ITEM	DESCRIPTION	Q'TY	PART NO.	REMARK.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

MIFX2-B03B0326R1-F5M-LF

SERIES

LEADFREE

5000mm

FEMALE TO FEMALE

ROUND CABLE

26 AWG

06 TO 06 WAY

DESCRIPTION: