
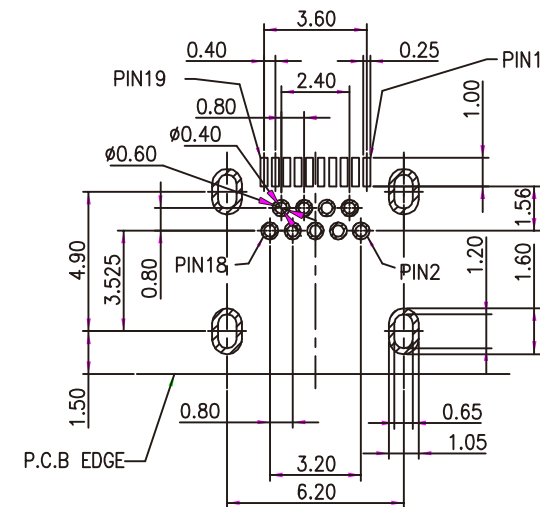


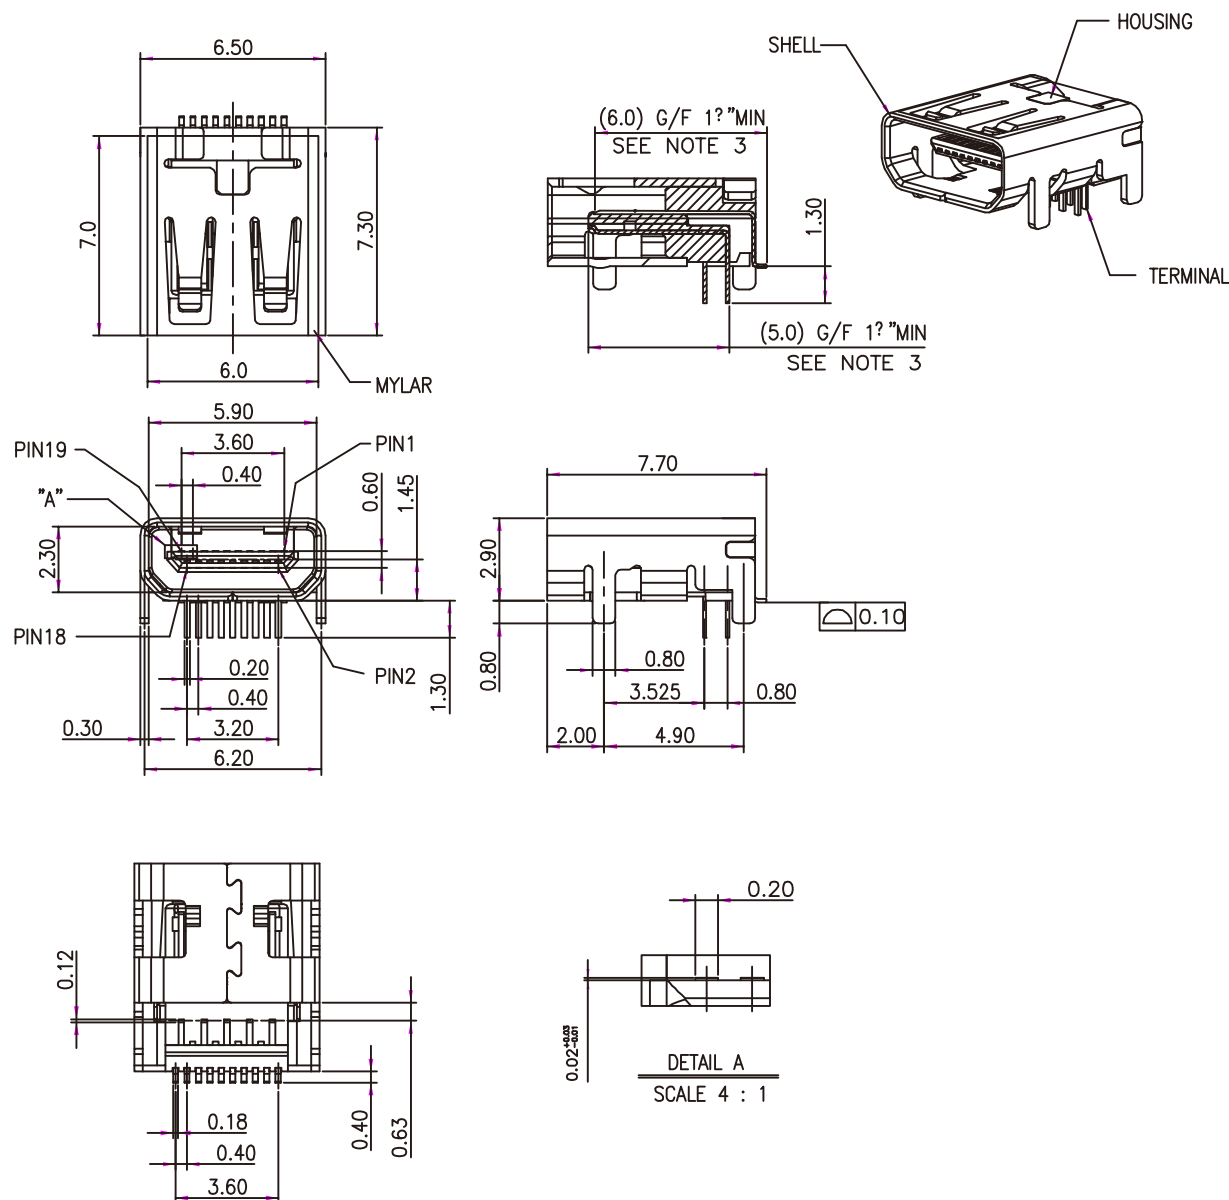

NOTES:

- UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
- MATERIAL:
HOUSING: LCP+ 30% G.F, UL94V-0 COLOR: BLACK
TERMINAL: COPPER ALLOY, THICKNESS = 0.12 ± 0.01 mm.
SHELL: STEEL ALLOY, THICKNESS = 0.30 ± 0.01 mm
- FINISH:
TERMINAL: Contact Area: Gold Flash Over Ni(50u" ~ 120u")
Solder Area: Gold Flash Over Ni(50u" ~ 120u")
SHELL: PLATING NICKEL 50u" ~ 120u" OVERALL
- LEAD-FREE AND ROHS COMPLIANT PRODUCT
- HSF CONCRFT LEVER1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIHDMI-SRWMM-19-LF

SERIES

LEADFREE

19 WAY

METAL FOOT

90°SMT

DIP 90°

FEMALE

DESCRIPTION: DMI D TYPE CONN. STD.(SMT+DIP) TYPE