
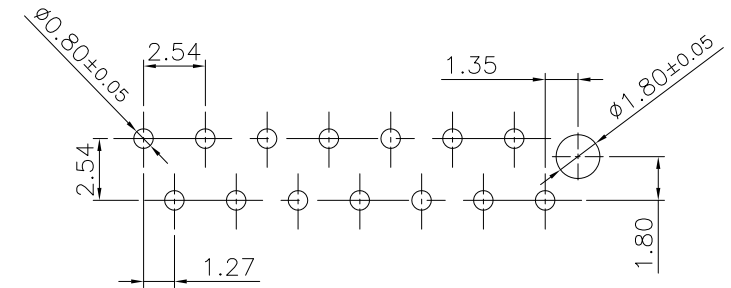


Specifications:
 Current Rating:1.5A AC/DC
 Voltage Rating:230V AC/DC
 Contact Resistance:20m Ohm Max
 Insulation Resistance:1000M Ohm Min
 Withstanding Voltage:AC 500V AC/Minute
 Operating Temperature Range:-40°C To +105°C

Materials and Finish:
 Insulator:High Temp Plastic(UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze
 Finish:Tin Plated



PCB Layout

Pos	Dimension		Pos	Dimension	
	A	B		A	B
4	8.45	2.54	16	23.69	17.78
6	10.99	5.08	18	26.23	20.32
8	13.53	7.62	20	28.77	22.86
10	16.07	10.16	22	31.31	25.40
12	18.61	12.70	24	33.85	27.94
14	21.15	15.24	26	36.39	30.48

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±






PJECTION

照片框

ORDER INFORMATION

MIM-IPBK-xx-LF
 SERIES | LEADFREE
 | 04~26WAY
 | BLACK
 | IDC PLUG

DESCRIPTION: 2.54mm IDC Connector

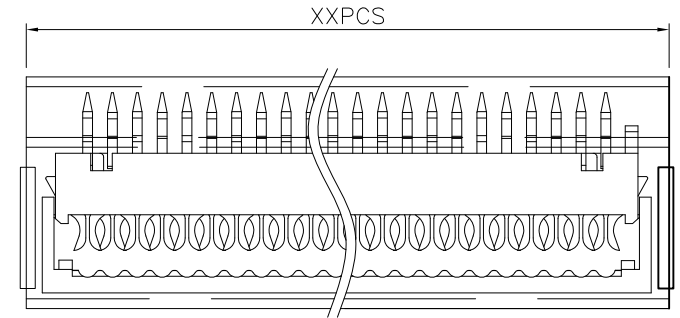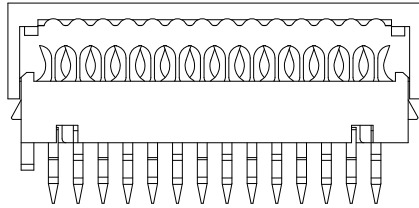

Note:

1.Dimension

Tube Size:635(L) (mm)

Inner Carton Size:650(L)X140(W)X125(H) (mm)

Carton Size:680(L)X280(W)X300(H) (mm)


2.Quantity:

XX Pcs/Tube


180 Tube/Inner Carton

4 Inner Carton/Carton

Pin.	Pcs/Tube	Pcs/Inner Carton	Q'TY/Carton
4	72	12960	51840
6	56	10080	40320
8	45	8100	32400
10	38	6840	27360
12	32	5760	23040
14	28	5040	20160
16	25	4500	18000
18	23	4140	16560
20	21	3780	15120
22	19	3420	13680
24	17	3060	12240
26	16	2880	11520



Inner Carton

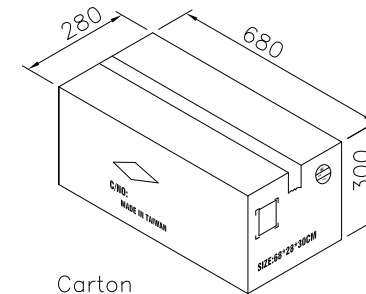

Carton

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

MIM-IPBK-xx-LF
SERIES | LEADFREE
| 04~26WAY
BLACK
IDC PLUG

DESCRIPTION: 2.54mm IDC Connector