


Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:30V AC, DC
 Contact tesistance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 500V AC/minute
 Operating Temperature:-40°C ~ +105°C

Materials:
 Insulator:Nylon 9T(UL94V-0)
 Contact material:Phosphor Bronze
 Finish:Tin Plated

Pos	Dim.A	Dim.B	Dim.C	Pos	Dim.A	Dim.B	Dim.C
4	9.70	3.81	5.60	16	24.94	19.05	20.84
6	12.24	6.35	8.14	18	27.48	21.59	23.38
8	14.78	8.89	10.68	20	30.02	24.13	25.92
10	17.32	11.43	13.22	22	32.56	26.67	28.46
12	19.86	13.97	15.76	24	35.10	29.21	31.00
14	22.40	16.51	18.30	26	37.64	31.75	33.54

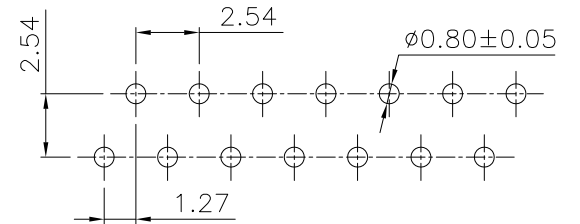

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

MIM-SRL-xx-LF
 SERIES L L L LEADFREE
 04-26WAY
 LATCH
 DIP 90°
 FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2.54mm PCB Connector 90° Type