

## SPECIFICATIONS

### Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze

### Electrical



Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.


Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40°C to +105°C

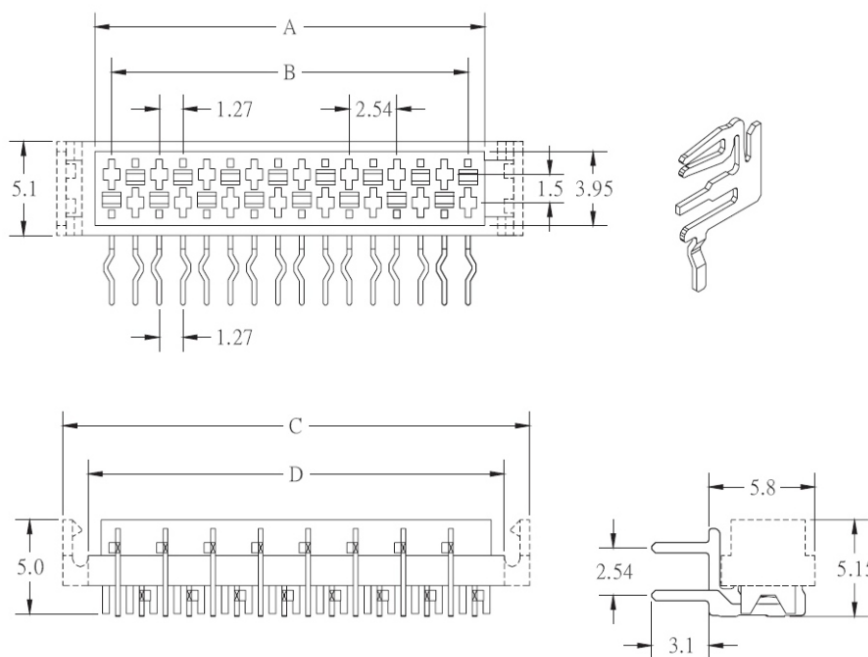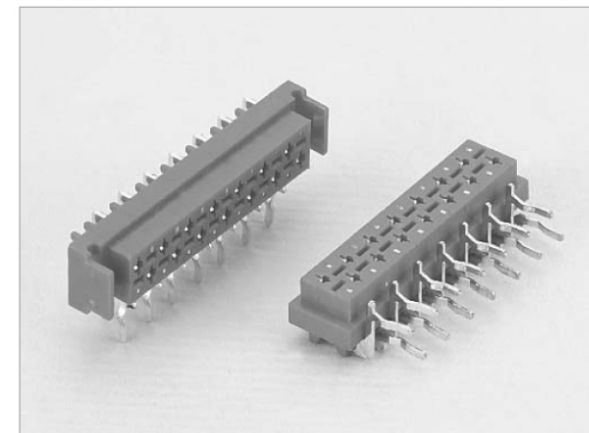

| POSITION | A     | B     | C     | D     |
|----------|-------|-------|-------|-------|
| 4        | 5.59  | 3.81  | 9.68  | 6.98  |
| 6        | 8.13  | 6.35  | 12.22 | 9.52  |
| 8        | 10.67 | 8.89  | 14.76 | 12.06 |
| 10       | 13.21 | 11.43 | 17.30 | 14.60 |
| 12       | 15.75 | 13.97 | 19.84 | 17.14 |
| 14       | 18.29 | 16.51 | 22.38 | 19.68 |
| 16       | 20.83 | 19.05 | 24.92 | 22.22 |
| 18       | 23.37 | 21.59 | 27.46 | 24.76 |
| 20       | 25.91 | 24.13 | 30.00 | 27.30 |
| 22       | 28.45 | 26.67 | 32.54 | 29.84 |
| 24       | 30.99 | 29.21 | 35.08 | 32.38 |
| 26       | 33.53 | 31.75 | 37.62 | 34.92 |

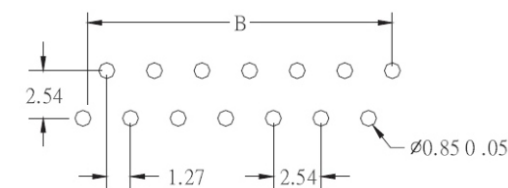

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIM-SRx-xx-LF

SERIES

LEADFREE

04~26WAY

BLANK:WITHOUT/LOCK

L:WITH/LOCK

DIP 90°

FEMALE

DESCRIPTION: