


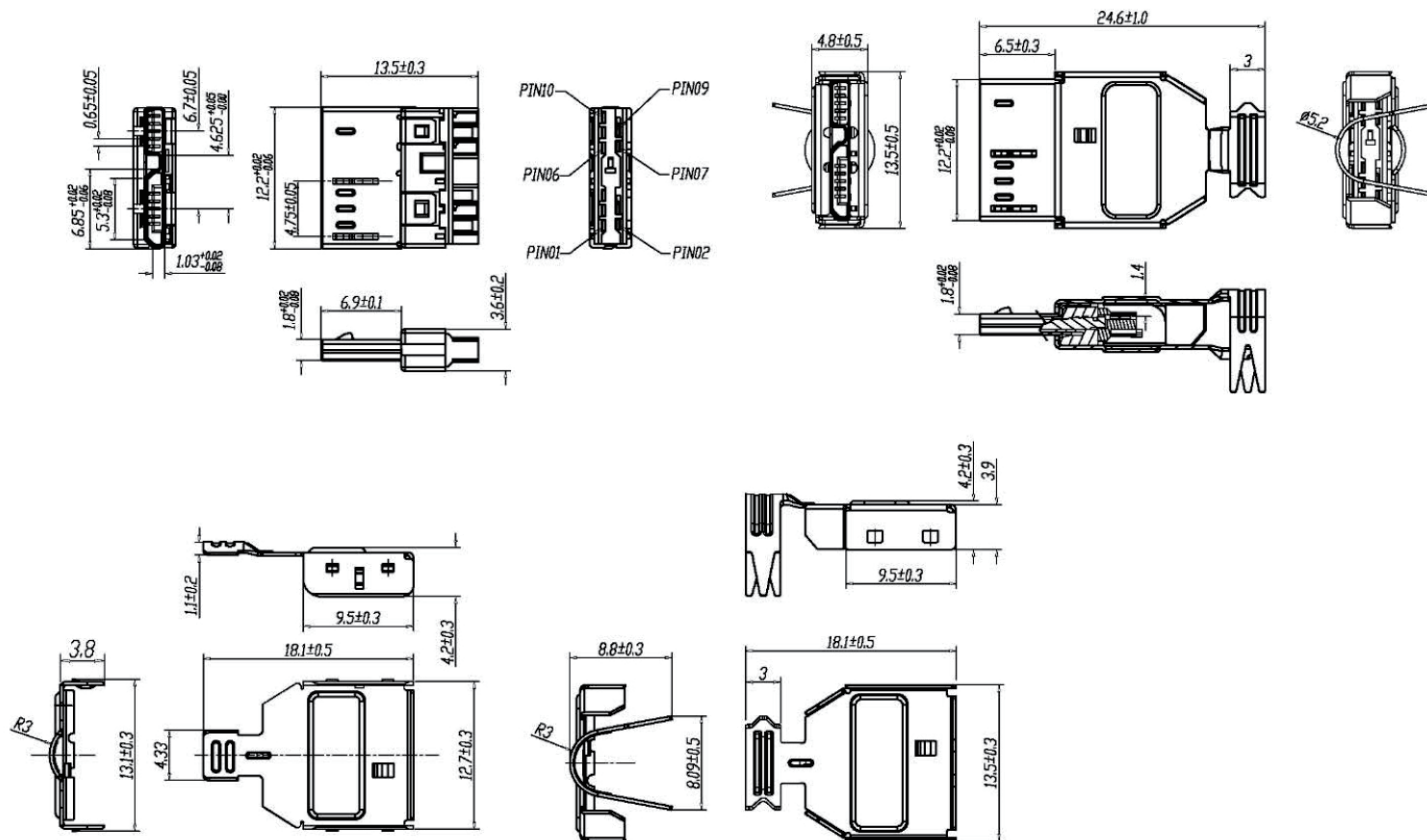

Note:

1.Material:

1.1 Housing:PBT+30%GF,UL94V-0.

1.2 Shell:SPCC.

1.3 Contact:PHOSPHOR BRONZE

2.FINISH:

2.1 CONTACT Plate with Gold Plate 15U"

2.2 shell:Nickel over all plating

3.Specification:

3.1 Dielectric withstanding voltage:100V(AC)

3.2 Contact resistance:50mΩ Max

3.3 Insulation resistance:100MΩ Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-PSxx-10B-LF

SERIES | LEADFREE
10 PIN B TYPE

MALE | WH:WHITE
BK:BLACK
BL:BLUE
SOLDER

DESCRIPTION: