
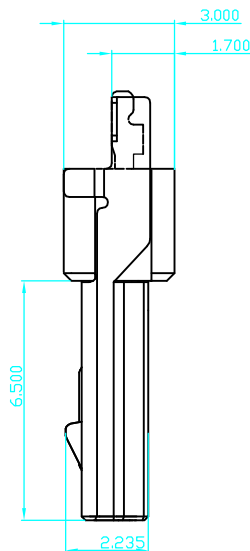


Recommended P.C.B Layout
TOLERANCE±0.05

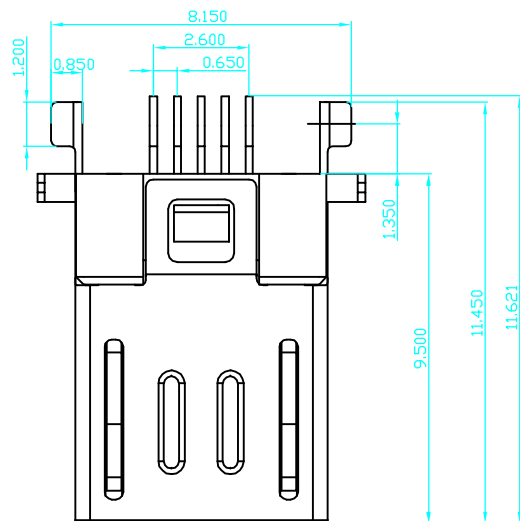

NOTES:

1.MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC
- 1.2 CONTACT: COPPER ALLOY
- 1.3 SHELL:SUS
- 1.4 LATCH:SUS

2.FINISH:

- 2.1 CONTACT: (SEE P/N.),50μ" MIN. NICKEL UNDERPLATING OVER ALL
- 2.2 STAINLESS STEEL:50μ"MIN. SOLDERABLE NICKEL PLATED.

03	Terminal	C5191	5	Gold plated within connect area ,Tin plated within solder area
02	Housing	LCP	1	UL94-V0, Color is black LCP
01	Shell	SUS/SPCC	1	Plating nickle or gold overall
序号 NO.	品名 PART NAME.	材料 MATERIAL	用量 Q TY	备注说明 NOTE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MISB-PWE-5B-LF
SERIES T T T LEADFREE
5 PIN B TYPE
EAR
90°SMT
MALE

DESCRIPTION: