

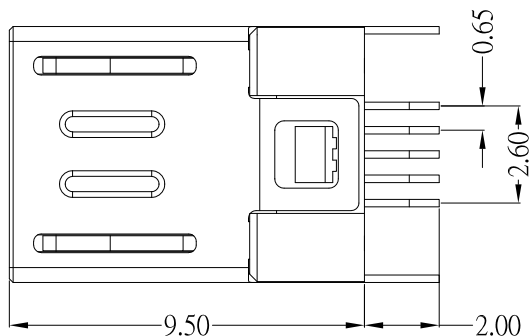
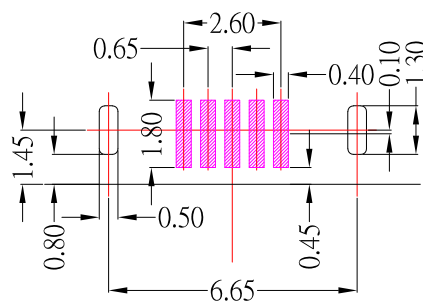


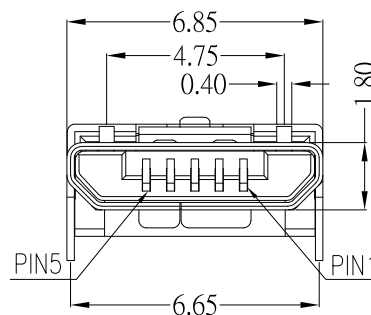

| CONTACT NUMBER | SIGNAL NAME |
|----------------|-------------|
| PIN 1          | VBUS        |
| PIN 2          | D-          |
| PIN 3          | D+          |
| PIN 4          | ID          |
| PIN 5          | GND         |

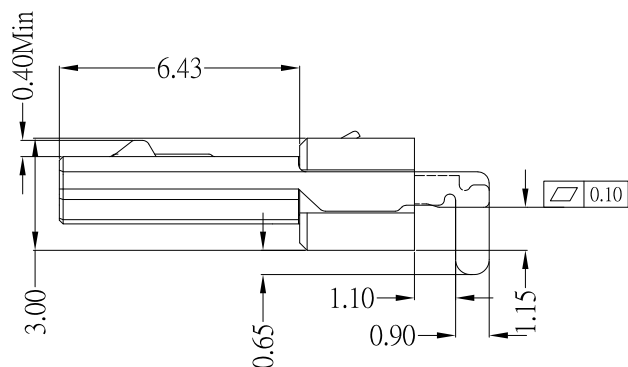

PCB LAYOUT

## SPECIFICATIONS

### Electrical:

- 1.Current Rating: 1.8A(pin1&pin5) ; 1.0A(other pin)
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 100 V AC
- 5.Insulation Resistance: 100 MΩ Min

### Material:

- 1.Housing: PA9T
- 2.Contact: Phosphor Bronze
- 3.Shell: SUS
- 4.Hook: SUS

### Finish:

- 1.Contact: Plated Gold in Mating Area ;  
Tin Plated on Solder Balls ;  
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

## RoHS Compliant

### TOLERANCES ARE

|               |        |
|---------------|--------|
| Up to 5       | ± 0.2  |
| Above 5 ~ 15  | ± 0.3  |
| Above 15 ~ 30 | ± 0.4  |
| Above 30 ~ 50 | ± 0.5  |
| Angle         | ± 0.3° |

照片框

## ORDER INFORMATION

|                  |
|------------------|
| MISB-PWM1R-5B-LF |
| SERIES           |
| LEADFREE         |
| 5 PIN B TYPE     |
| REEL             |
| METAL FOOT       |
| 90°SMT           |
| MALE             |

DESCRIPTION: MICRO USB 5P/M 板端 SMT TYPE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

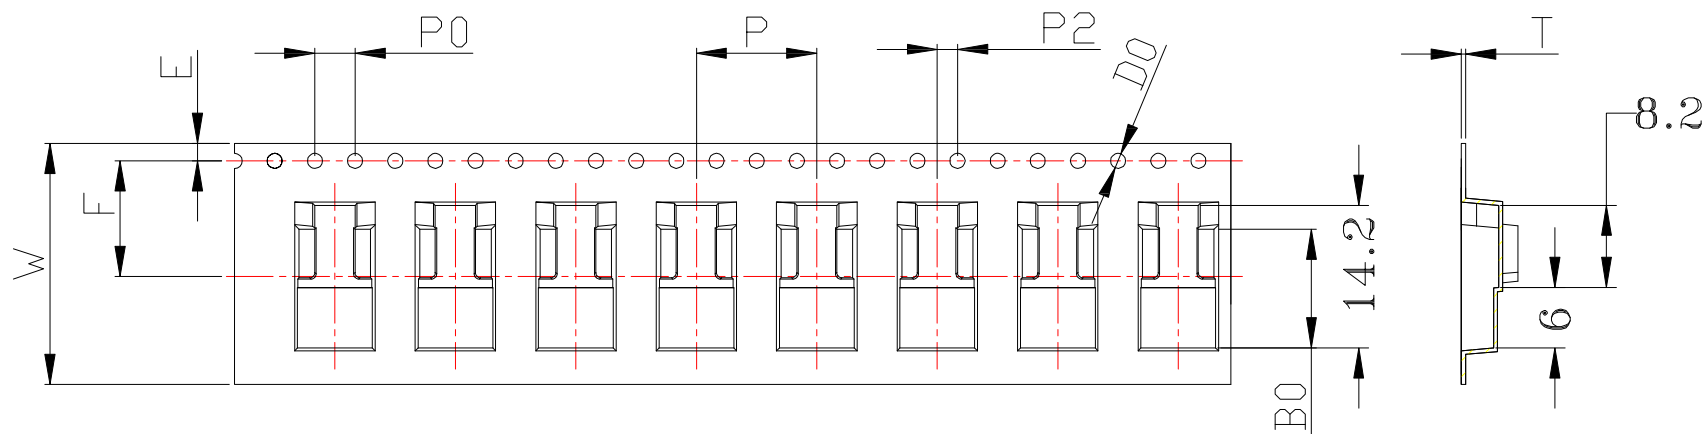


備注:

1.材質:黑色 PS

2.厚度:0.40±0.05mm

3.13"卷輪每卷長度:12.6 Meters

4.13"卷輪包裝元件顆粒數:1,000 PCS

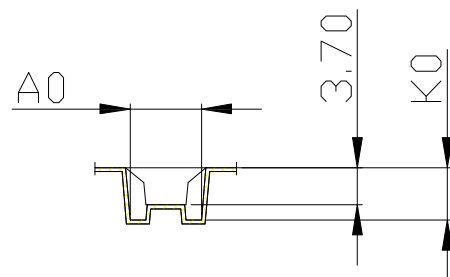

| W                                      | A <sub>0</sub>                         | B <sub>0</sub>                         | K <sub>0</sub>                         | K <sub>1</sub> | P                                      | F                                       | E                                      | D <sub>0</sub>                         | D <sub>1</sub> | P <sub>0</sub>                         | P <sub>2</sub>                         | T                                      |
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------|----------------------------------------|-----------------------------------------|----------------------------------------|----------------------------------------|----------------|----------------------------------------|----------------------------------------|----------------------------------------|
| 24.0 <sup>+0.30</sup> <sub>-0.30</sub> | 7.10 <sup>+0.10</sup> <sub>-0.10</sub> | 11.8 <sup>+0.10</sup> <sub>-0.10</sub> | 5.20 <sup>+0.10</sup> <sub>-0.10</sub> |                | 12.0 <sup>+0.10</sup> <sub>-0.10</sub> | 11.50 <sup>+0.10</sup> <sub>-0.10</sub> | 1.75 <sup>+0.10</sup> <sub>-0.10</sub> | 1.50 <sup>+0.10</sup> <sub>-0.00</sub> |                | 4.00 <sup>+0.10</sup> <sub>-0.10</sub> | 2.00 <sup>+0.10</sup> <sub>-0.10</sub> | 0.40 <sup>+0.05</sup> <sub>-0.05</sub> |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-PWM1R-5B-LF

SERIES  
LEADFREE  
5 PIN B TYPE  
REEL  
METAL FOOT  
90°SMT  
MALE

DESCRIPTION: REEL PACKING