


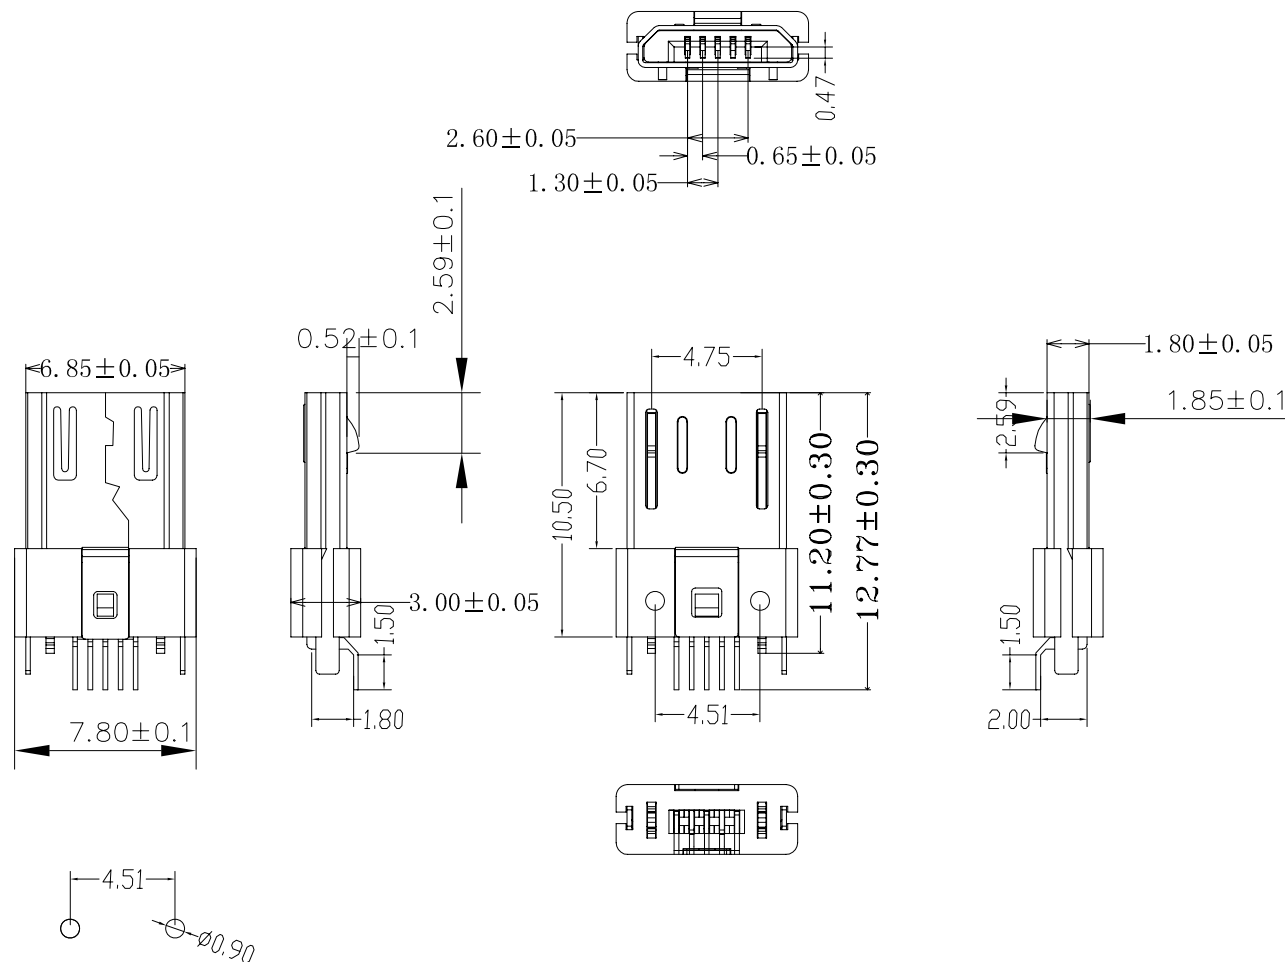

NOTES:

1. ELECTRICAL (电气特性) :
 - 1.1. THE VOLTAGE & CURRENT RATE (额定电压和电流) :
30V AC, 1.0A Max;
 - 1.2. WITHSTANDING VOLTAGE (耐压强度) :
500VAC / 1 minute 漏电流 0.5mA Max;
 - 1.3. CONTACT RESISTANCE (导通阻抗) :
30mΩ ohms Max AT 100mA;
 - 1.4. INSULATE RESISTANCE (绝缘阻抗) :
1000M ohms Min AT 20° C DC1000 V ;
2. MECHANICAL (物理特性) :
 - 2.1. MATING FORCE (插入力) : 35N Max;
 - 2.2. UNMATING FORCE (拔出力) : 7N Min;
 - 2.3. LIFE TEST (寿命测试) : 5000 cyc les Min;
200 cyc les/hour;
 3. SALT SPRAY TEST TIME: 12H Min ; (盐雾测试至少12小时)
 4. THE DIMENSIONS MARKED " " SHALL BE CHECKED
(标注 " " 尺寸必须重点检验)

3	Shell	SPCC or Brass T=0.30mm	1	See Order Information
2	Housing	Thermoplastic pbt	1	See Order Information
1	Contact	T=0.25mm BRASS		Gold Flash on Contact And Tin on Tail
NO.	Part Name	Material		Color&Plating
PARTS LIST				

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-PWP-5B-LF
SERIES T T T LEADFREE
5 PIN B TYPE
POST
90° SMT
MALE

DESCRIPTION: Micro usb 5p超薄SMT型