

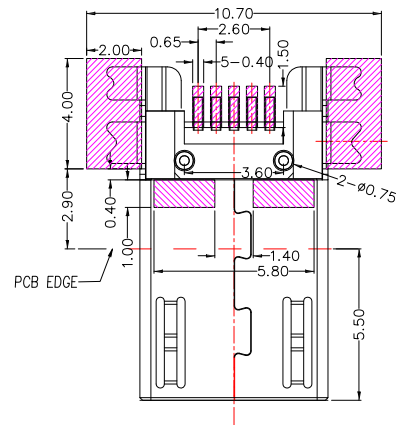

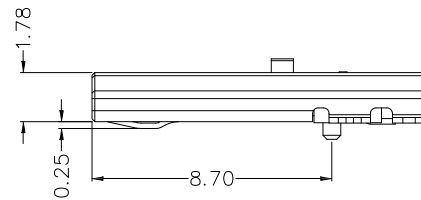



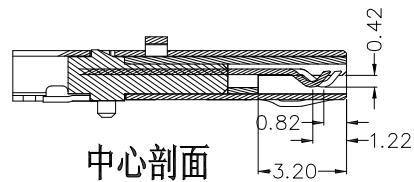

P.C.B LAYOUT MOUNTING PATTERN

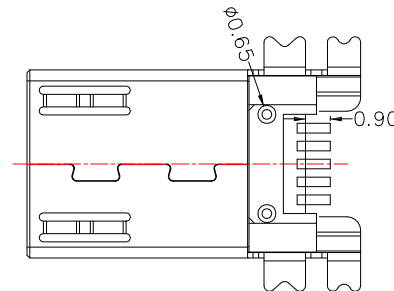

NOTES:

MATERIAL:

- 1.1 HOUSING: LCP UL94V-0 ,Black
- 1.2 COVER: LCP UL94V-0 ,Black
- 1.3 CONTACT: PHOSPHOR BRONZE
- 1.4 SHELL: SUS

Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall

- 2.2 Shell: Nickel under Plated surface layer

3.SPECIFICATION:

- 3.1 RATING: 1.0 A , 30VAC
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1min
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 TOTAL MATING FORCE: 3.70 Kgf MAX.
- 3.6 TOTAL UNMATING FORCE: 1.0 Kgf MIN.
0.81~2.05 Kgf MIN.
- 3.7 LIFE: 10,000 CYCLES
- 3.8 TEMPERATURE RANGE: -30°C ~ +80°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

MISB-PWRVEEP3-5B-LF
SERIES T T T T LEADFREE
MALE REVERSED POST 5 PIN B TYPE
90°SMT

DESCRIPTION: MICRO USB 5Pin 公頭反向 SMT type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com