

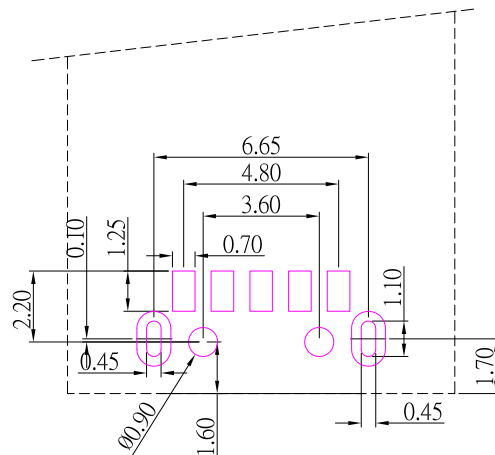


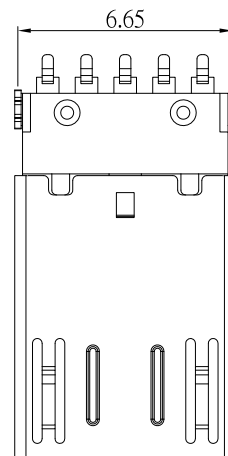


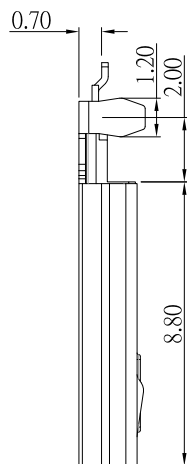

PCB LAYOUT MOUNTING PATTERN

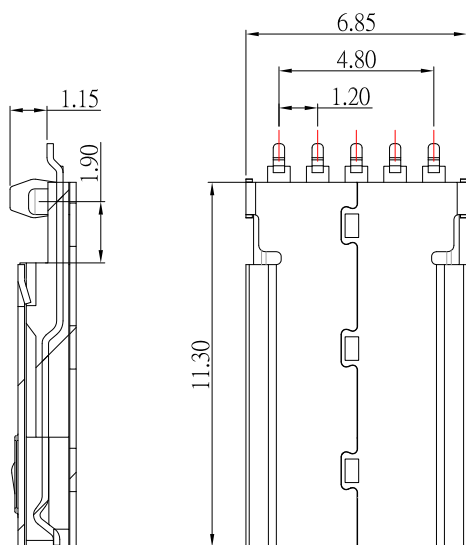

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.8 A(Pin1,Pin5) / 1.0 A(Pin2,3,4)
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 mΩ Max
- 4.Dielectric Withstanding Voltage: 500 V AC
- 5.Insulation Resistance: 100 MΩ Min

Environmental:

- 1.Operating Temperature: -20°C ~ 85°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISB-PWRVMP1-5B-LF
 SERIES T T T T LEADFREE
 MALE POST METAL FOOT
 REVERSED
 90°SMT

DESCRIPTION: MICRO USB 5 P 公頭貼板反向

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3°