
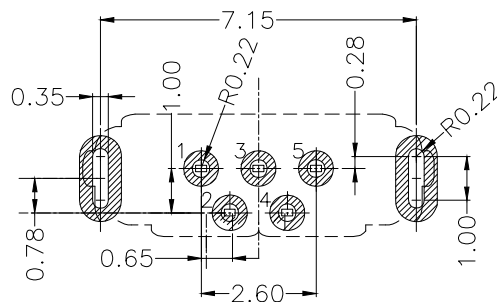
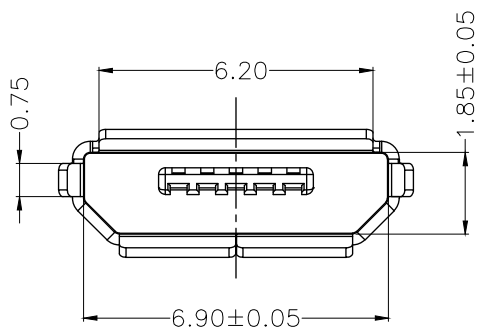
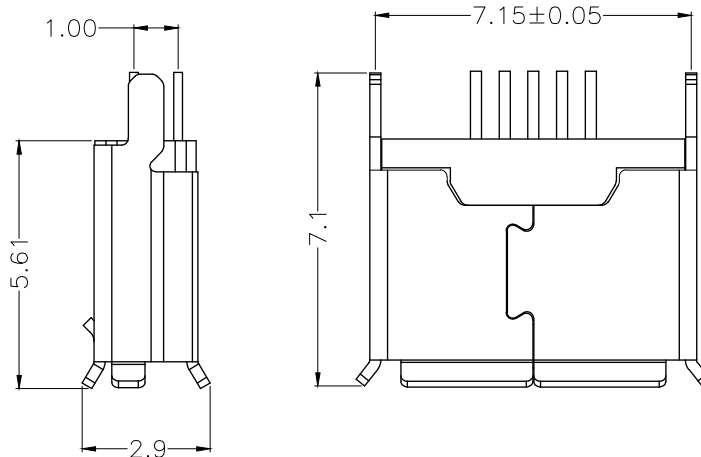


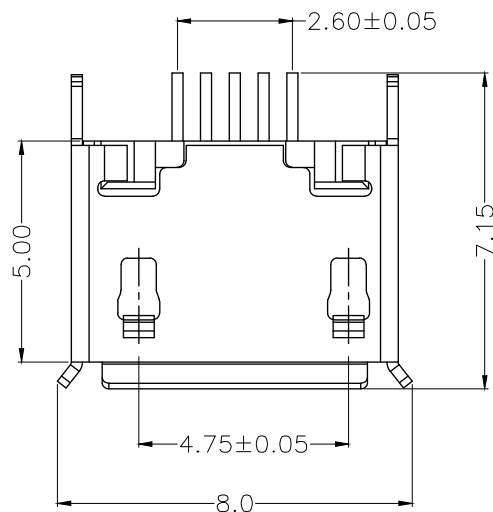

**RECOMMENDED P.C.B LAYOUT**

**备注:**

**1.产品规格:**

- 1-1.插入力:35N MAX.
- 1-2.拔出力:10N MIN.INITIAL 8-20N AFTER
- 1-3.额定电流:1.0A
- 1-4.额定电压:30V
- 1-5.耐久性:3000 CYCLES MIN.
- 1-6.耐电压:100V AC MIN.
- 1-7.接触阻抗:30mΩ MAX.INITIAL;40mΩ MAX
- 1-8.绝缘电阻:100MΩ MIN
- 1-9.工作温度:-30°TO +125°

**2.材質:**

- 2-1 膠芯: LCP UL 94-V0 BK.
- 2-2 端子: C5191 ,t=0.20mm.
- 2-3 外殼: SUS ,t=0.25mm.

**3.電鍍:**

- 3-1 端子: 鍍底50u"min, 鍍全金1u"min
- 3-2 外殼: 鍍霧錫50u"min.

**RoHS Compliant**

**TOLERANCES ARE**

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.20  
.XX ± 0.10  
.XXX ± 0.05  
ANG ± 2°

照片框

**ORDER INFORMATION**

**MISB-SDM2-5B-LF**

SERIES  
LEADFREE  
5 PIN B TYPE  
METAL FOOT  
DIP 180°  
FEMALE

DESCRIPTION: