


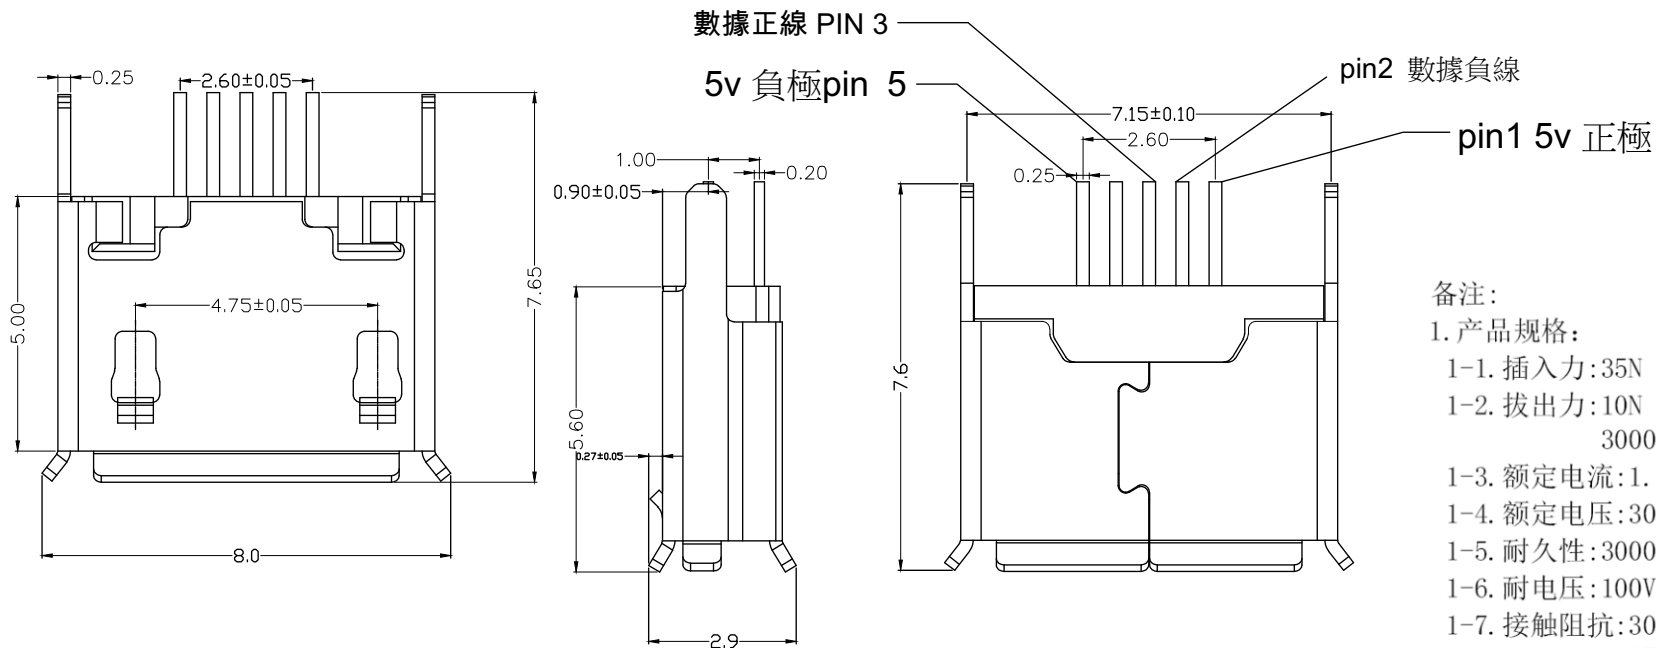

RECOMMEDED P.C.B LAYOUT

备注:

1. 产品规格:

1-1. 插入力: 35N MAX.

1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES

1-3. 额定电流: 1.0A

1-4. 额定电压: 30V

1-5. 耐久性: 3000 CYCLES MIN.

1-6. 耐电压: 100V AC MIN.

1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES

1-8. 绝缘电阻: 100MΩ MIN

1-9. 工作温度: -30° TO +80°

2. ??:

2.1 胶芯: LCP UL94V-0

2.2 端子: C5191, 镍底, 镀金1μ"

2.3 外壳: SUS

3. 所用材质须符合RoHS要求

4. 重点尺寸标识"▲"符号

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ± 0.03

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SDM2BX-5B-LF

SERIES

FEMALE

DIP 180°

METAL FOOT

LEADFREE

5 PIN B TYPE

NON BUMPS

B LAYOUT

DESCRIPTION: