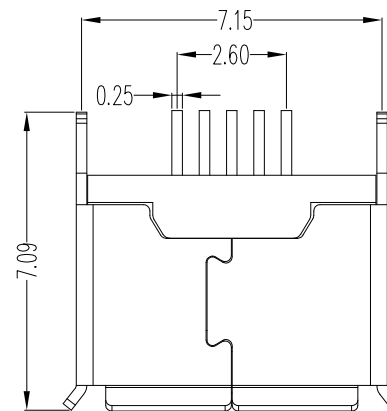
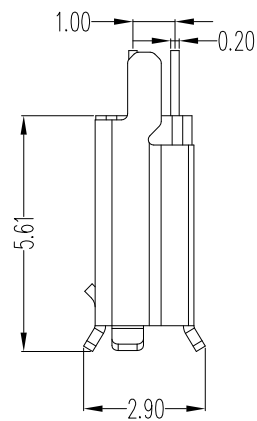
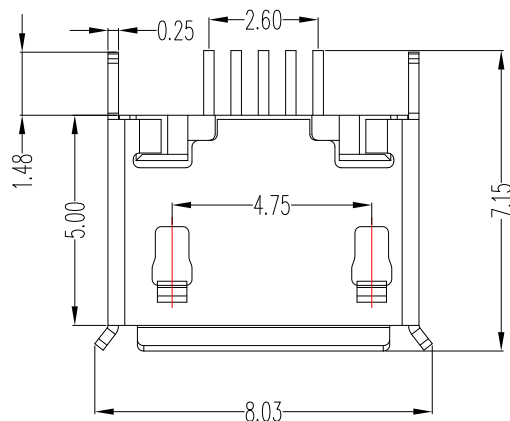


P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

1.Electrical:

- 1.1 Current Rating: 1.5Ampere Maximum for Pin1&Pin5
0.5Ampere Maximum for Pin2&Pin3&Pin4
- 1.2 Voltage Rating: 30V
- 1.3 Contact resistance : 30mΩ max.
- 1.4 Dielectric withstanding voltage : 100 V AC.
- 1.5 Insulation resistance : 100MΩ min.

2.Mechanical:

- Mate and unmate force:
- Mate force : 35N MAX
- Unmate force : 10N MIN

3.Environment:

- Operating Temperature : -30°C to +80°C.

4.Material:

- Housing : LCP,UL94V-0
- Contact: Phosphor Bronze
- Shell: SUS304

5.Plating Layer:

- Contact: Plated Gold in Mating Area ;
- Gold Plated on Solder Balls ;
- Nickel under plated overall
- Shell: Tin under Plated surface layer

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

MISB-SDM2R-5B-LF





SERIES | | | LEADFREE
5 PIN B TYPE
FEMALE | REEL
METAL FOOT
DIP 180°

DESCRIPTION: MICRO USB B TYPE 180 度 DIP 腳

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

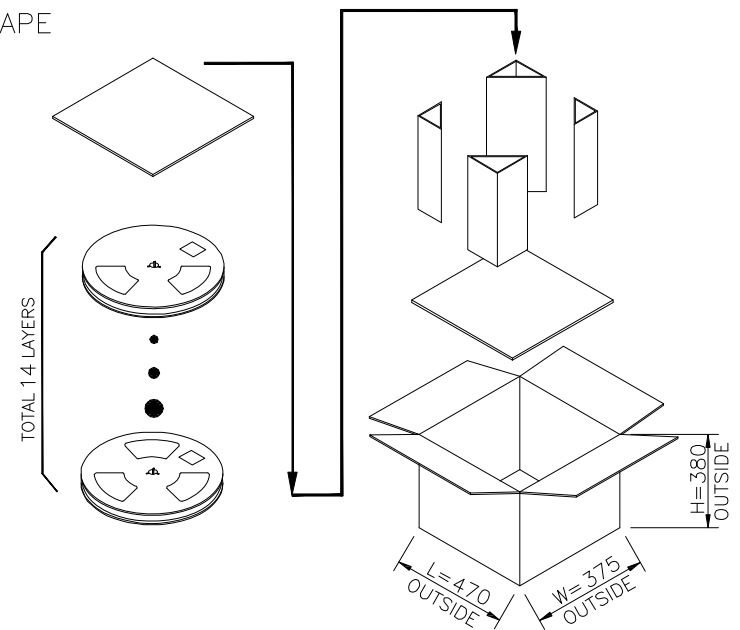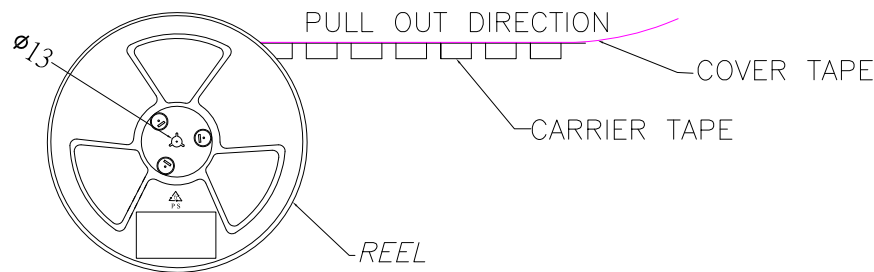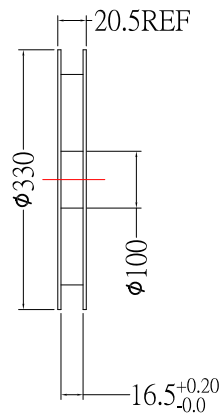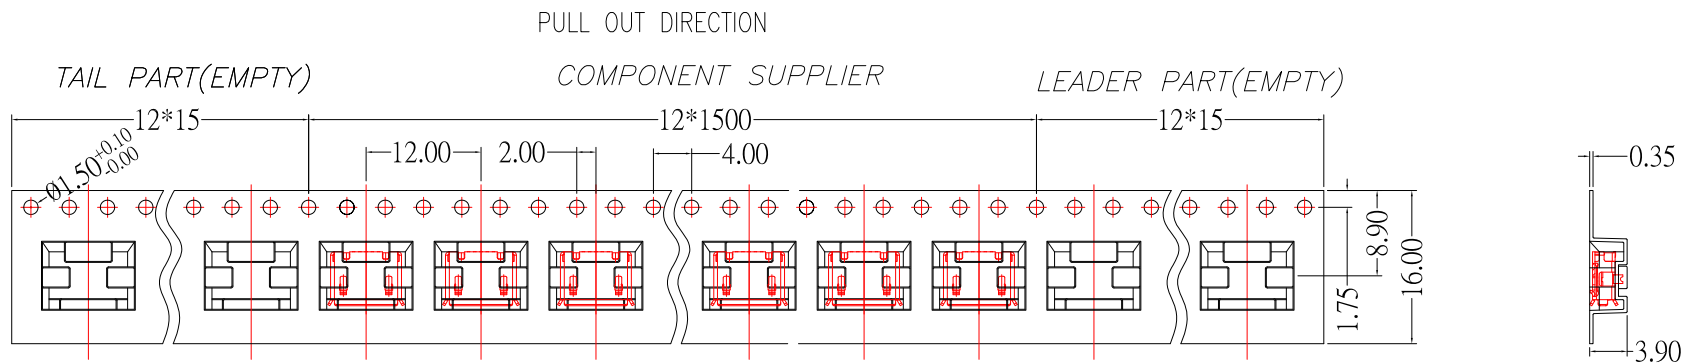

備注:

- 1.物料:CARRIER TAPE : POLYSTYREN (PS) ;
COVER TAPE : POLYSTYREN (PS) ; REEL : POLYSTYREN (PS)
- 2.包裝數:1500PCS/REEL , 14REEL/CARTON , 21,000PCS/CARTON
- 3.剝離力: 0.3N~1N (跳動量在0.3N內) ; 剝離角度: 165°~175°;剝離速度: 250~300mm/min
- 4.包裝方式: 自黏式; CARRY TAPE前部分與尾部分各留出240mm長度 (即15個空格) 不裝產品

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SDM2R-5B-LF

SERIES

FEMALE

REEL

METAL FOOT

DIP 180°

LEADFREE

5 PIN B TYPE

DESCRIPTION: