


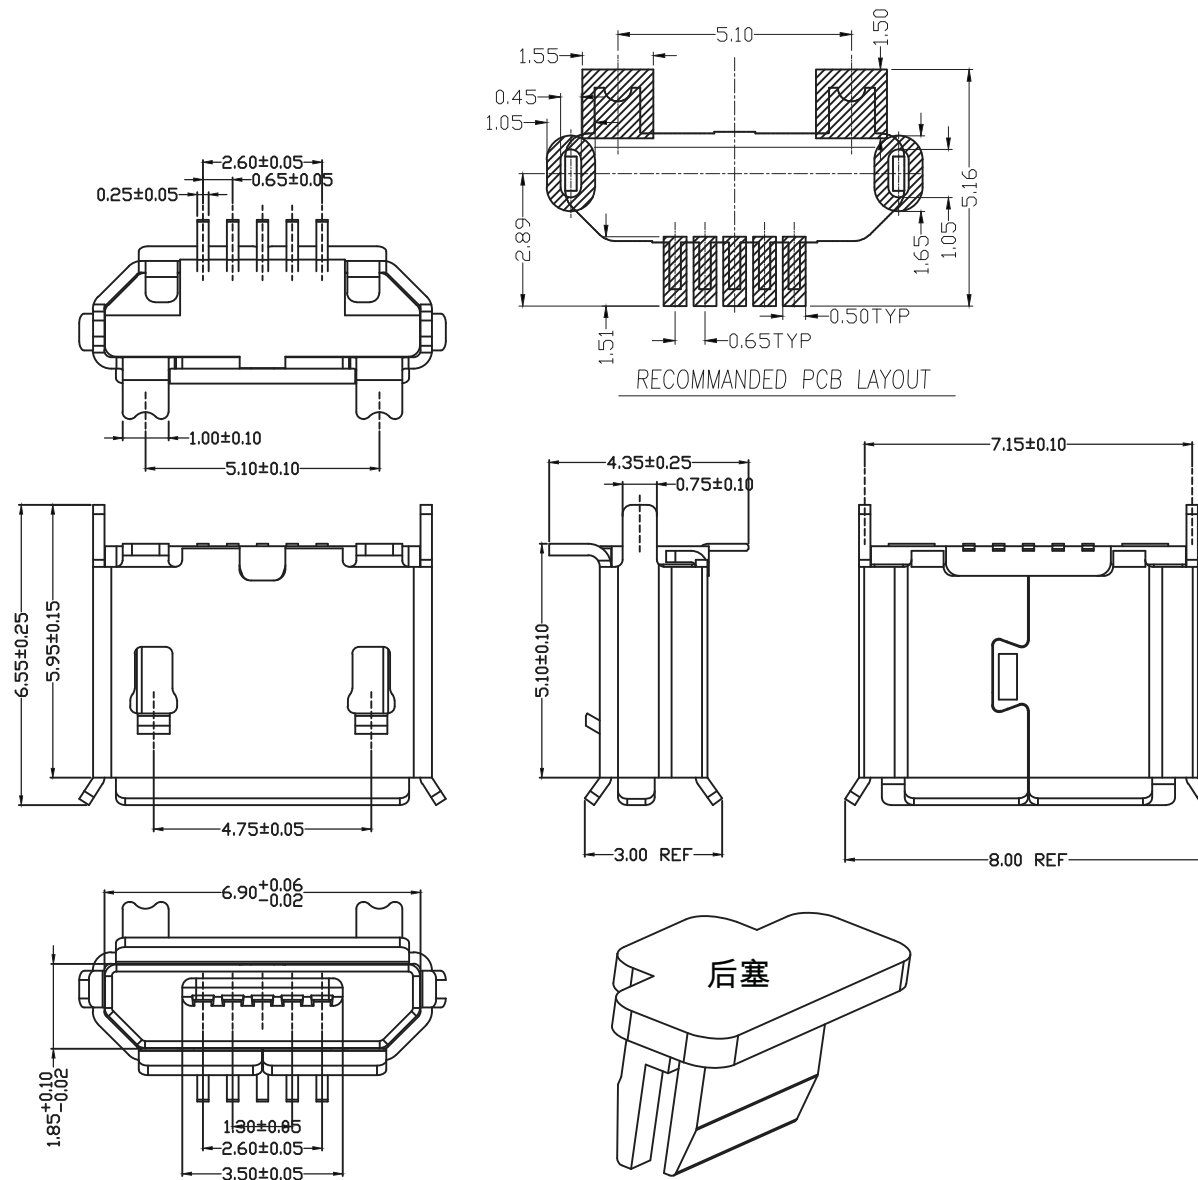

备注:


1. 产品规格:

- 1-1. 插入力: 35N MAX.
- 1-2. 拔出力: 8N MIN. INITIAL 8-25N AFTER 3000 CYCLES
- 1-3. 额定电流: 1.0A
- 1-4. 额定电压: 30V
- 1-5. 耐久性: 5000 CYCLES MIN.
- 1-6. 耐电压: 100V AC MIN.
- 1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES
- 1-8. 绝缘电阻: 100MΩ MIN
- 1-9. 工作温度: -30° TO +80°

2. 材质:

- 2.1 胶芯: LCP UL94V-0
- 2.2 端子: C2680R-H, 镍底, 镀全金 1μ"
- 2.3 外壳: SUS201/301, 表面镀雾锡/镀镍

3. 重点尺寸标识"▲"符号

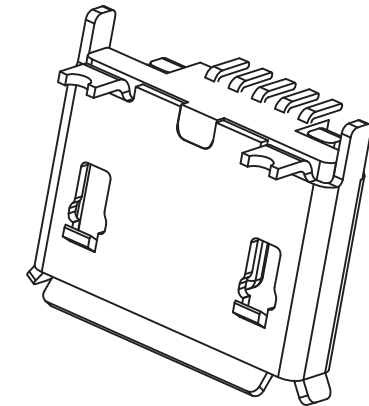

后塞

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4




X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

ORDER INFORMATION


MISB-SVEM2CR-5B-LF
SERIES
FEMALE
180°SMT
LEADFREE
5 PIN B TYPE
REEL
CAP
METAL FOOT
EAR

DESCRIPTION:

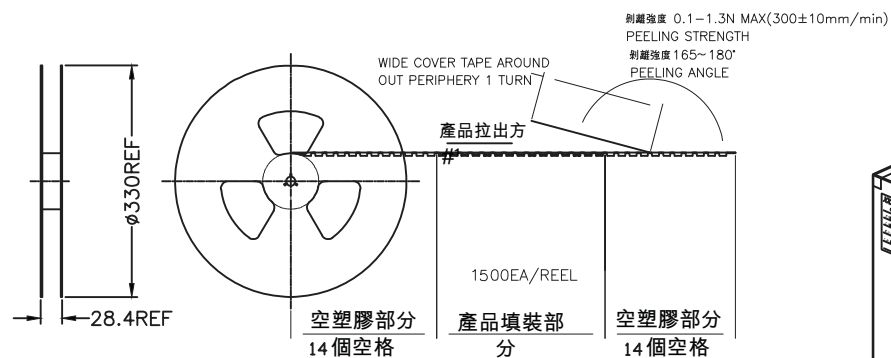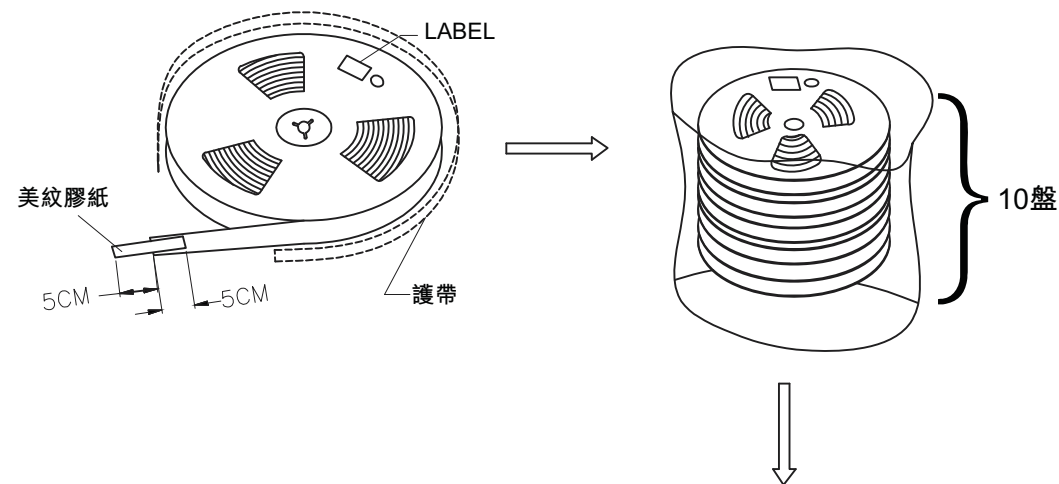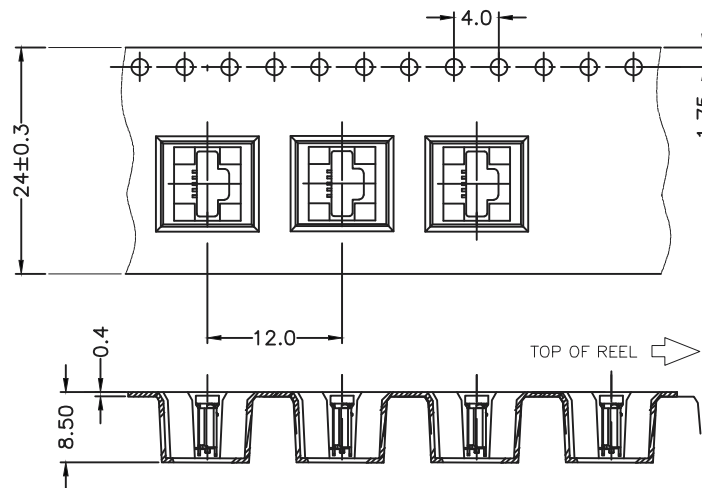

说明:

- 1.将检查合格的产品，放入承载带中，一盘包装700PCS;
- 2.将10盘承载带放入PE袋中，同时放入干燥剂;
- 3.将纸箱封装好，贴上标签，每箱装7000PCS.

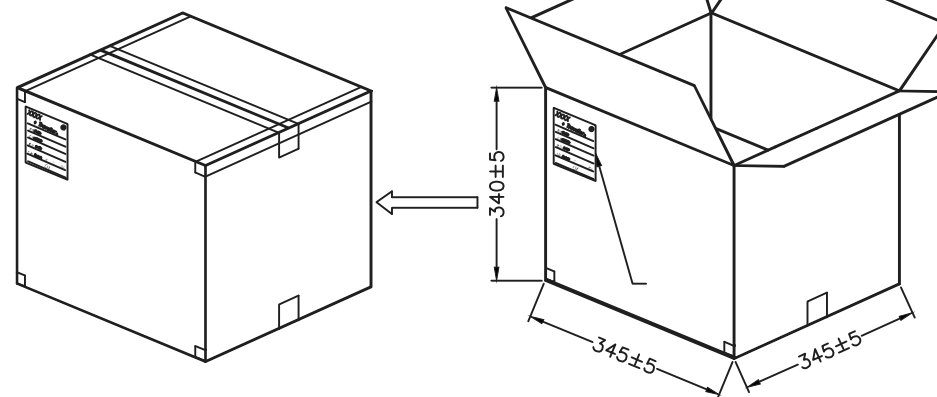

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SVEM2CR-5B-LF
SERIES REEL LEADFREE
5 PIN B TYPE
FEMALE 180°SMT REEL
CAP METAL FOOT
EAR

DESCRIPTION: