

**MATERIAL:**


- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Black.
- 1.2 Terminal: Copper Alloy.
- 1.3 Shell: Stainless Steel.

**ELECTRICAL:**

- 2.1 Current rating: 1.0A(2,3,4p) 1.8A(1,5p)
- 2.2 Voltage: 30VDC Max.
- 2.3 Contact resistance: 30 milliohms Max.
- 2.4 Insulation resistance: 1000 Megohms Min.
- 2.5 Withstanding voltage: 100V AC/Minute.
- 2.6 Temperature range: -25°C to +85°C.

**RoHS Compliant**


TOLERANCES ARE

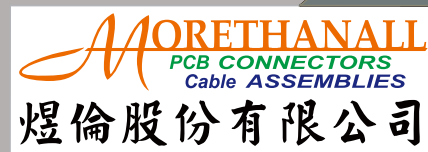

DRAWING BY CY		X ±
CHECKED BY GENIUS		.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XX ± 0.20
DATE		.XXX ± 0.10
		ANG ±

照片框

**ORDER INFORMATION**

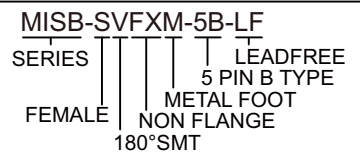

www.morethanall.com

SIZE A4 PROJECTION

DESCRIPTION: Micro USB 5Pin Female SMT VERTICAL TYPE