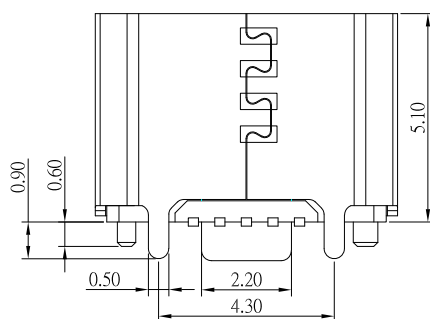
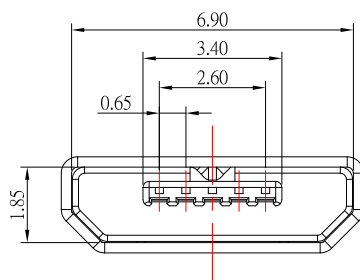
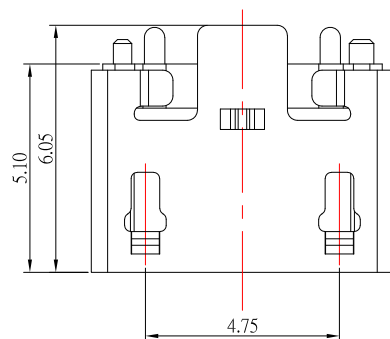



NOTES:

1.MATERIAL:


- 1.1 HOUSING: LCP,Black
- 1.2 CONTACT: BRASS
- 1.3 SHELL: SUS

2.Finish:

- 2.1 CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 SHELL: TIN OR NICKEL UNDER PLATED SURFACE LAYER

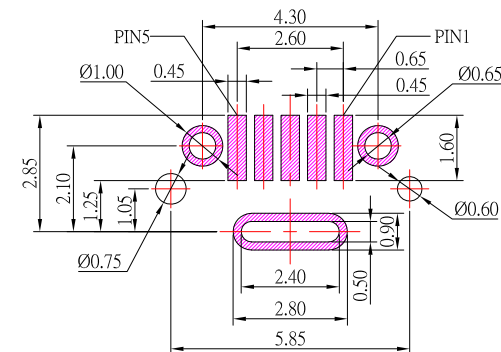

P.C.B LAYOUT MOUNTING PATTERN

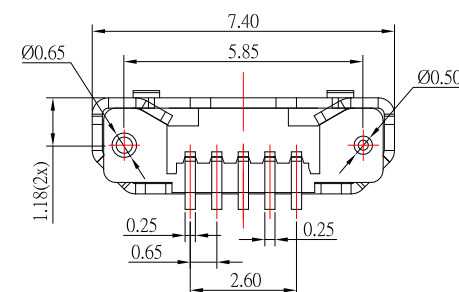

3.SPECIFICATION:

- 3.1 CURRENT RATING: 1.0 A
- 3.2 DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC / MINUTE
- 3.3 CONTACT RESISTANCE: 30 mΩ MAX.
- 3.4 INSULATION RESISTANCE: 100 MΩ MIN.
- 3.5 LIFE: 10,000 CYCLES

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

MISB-SVFXMPM-5B-LF
SERIES MISB SVFXMPM 5B LF
LEADFREE
5 PIN B TYPE
METAL FOOT
POST
METAL FOOT
NON FLANGE
FEMALE
180°SMT

DESCRIPTION: MICRO USB 直立式 SMT TYPE 無捲邊有框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

PPOJECTION