

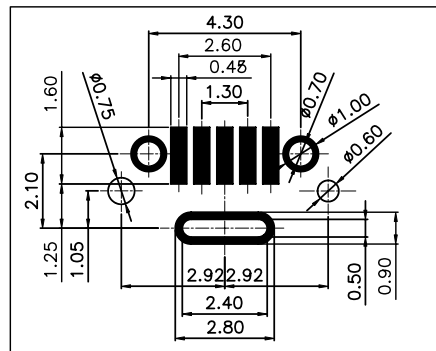
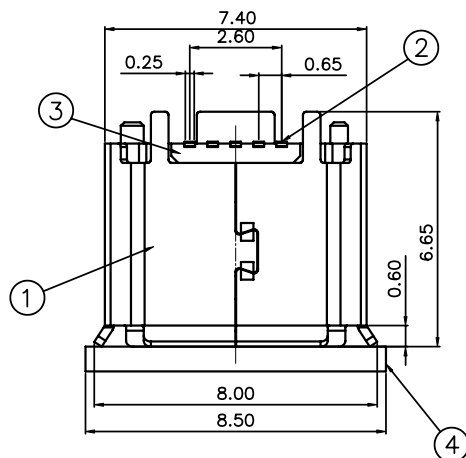
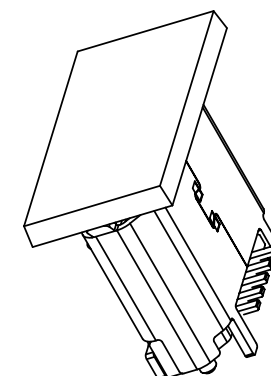
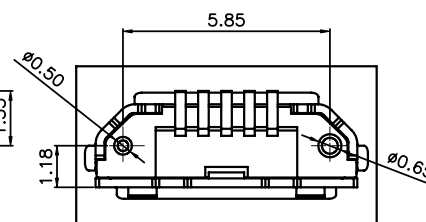



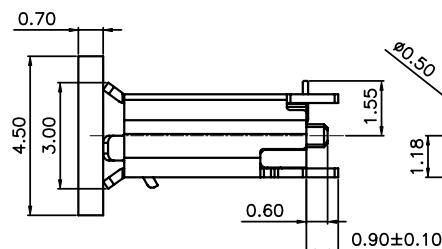


RECOMMENDED P.C.B. LAYOUT
TOLERANCE $\pm 0.03\text{mm}$

ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	SHELL	1	STAINLESS	50u" NICKEL
2	CONTACT	5	COPPER ALLOY	Gold FLASH(Min.); 50u" NICKEL
3	HOUSING	1	SYNTHETIC RESIN	(Black)
4	CAP	1	SYNTHETIC RESIN	(Black)

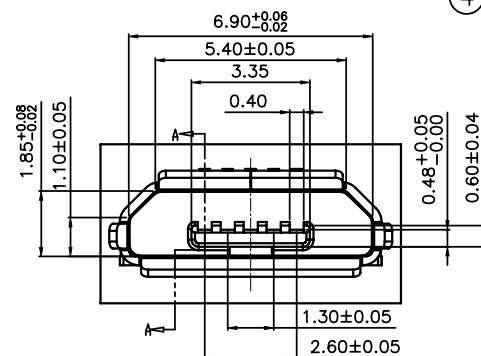

SPECIFICATION
MATERIAL
 See drawing
STANDARD DATA
 Rating current: 0.5A
ELECTRICAL
 Insulator resistance: 1000M ohms Min. @ 500 VDC
 Withstanding voltage: 100 VAC / minute
 Contact resistance: 30 m ohms
MECHANICAL
 Mating force: 35N(3.57kgf) Max.
 Unmating force (Without lock): 8N(0.81kgf) Min.
 Durability: 10000 cycles Min.
 Contact retention force: 2.1N(0.21kgf) Min

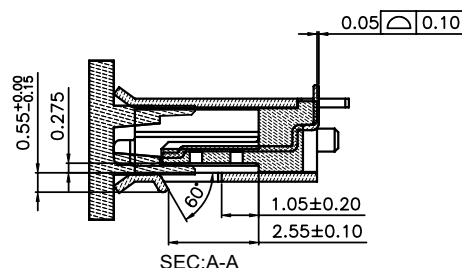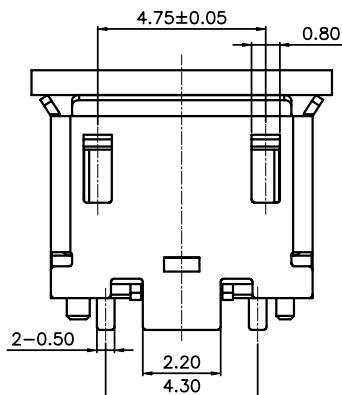

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISB-SVMPCR-5B-LF
 SERIES REEL LEADFREE
 5 WAY B TYPE
 FEMALE 180°SMT CAP POST METAL SHIELD

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1



DATE

SIZE A4



PPOJECTION

X, ±
 .X ± 0.50
 .XX ± 0.30
 .XXX ± 0.20
 ANG ± 5°


DESCRIPTION: I/O CONNECTOR(MICRO USB)

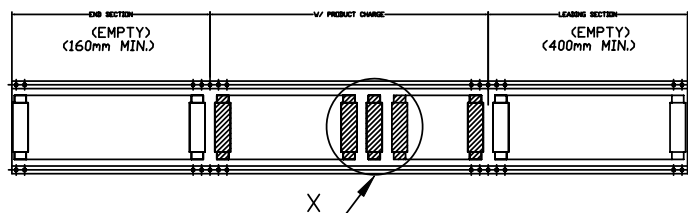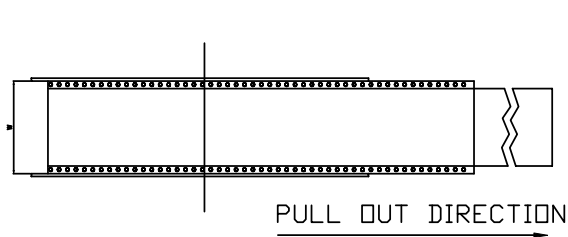


ITEM 項目	PARTS NAME 零件名稱	FINISH/REMARK 處理/備註
1	I/O CONNECTOR	4200 PCS/BOX
2	BOX	6PCS REEL/BOX
3	WATERPROOF BAG	1 PCS
4	REEL	700PCS/REEL
5	COVER TAPE	Wide=24mm
6	CARRIER TAPE	14.5/REEL
7	LABEL	批號標籤

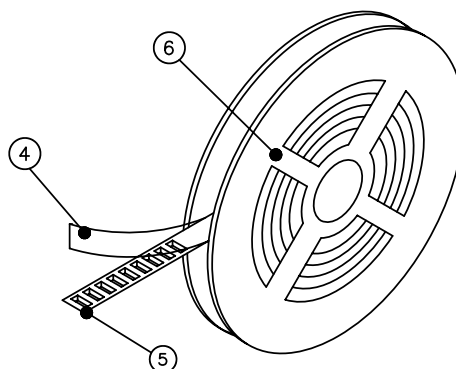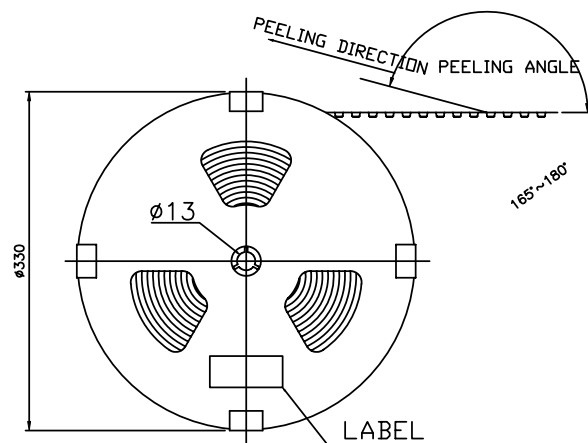

收料方向
CATCHER MATERIAL
DIRECTION

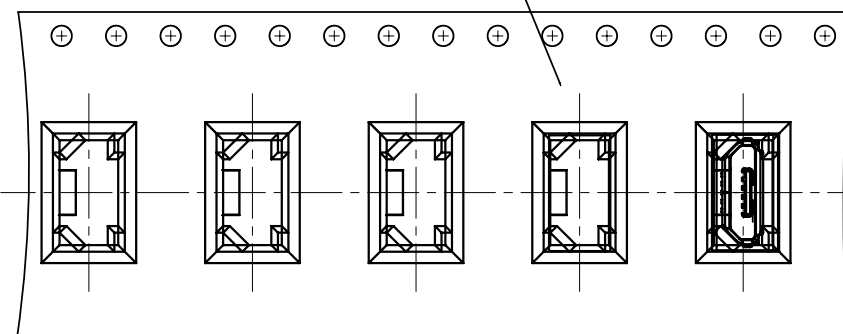

客戶放料方向
INPUT MATERIA
DIRECTION

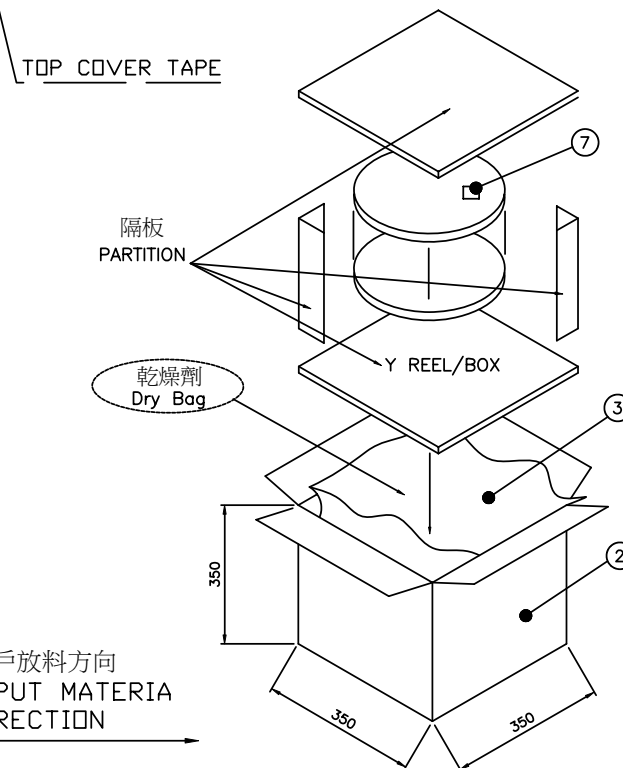

NOTES

1.MATERIAL: PS (透明白)

2.DEFORMATION(變形)&DAMAGE(損壞): NA.(不可)

3.All dimensions meet EIA-481-C requirements.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SVMP-5B-LF

SERIES

LEADFREE

5 WAY B TYPE

REEL

FEMALE 180°SMT

CAP POST METAL SHIELD

DESCRIPTION: I/O CONNECTOR(MICRO USB)