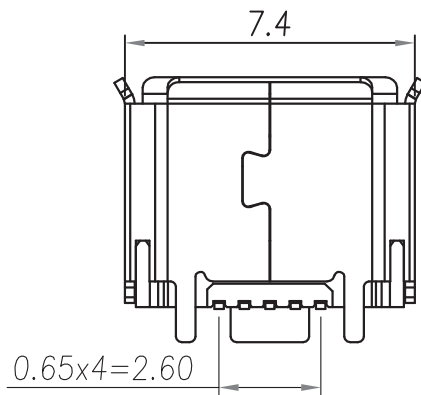
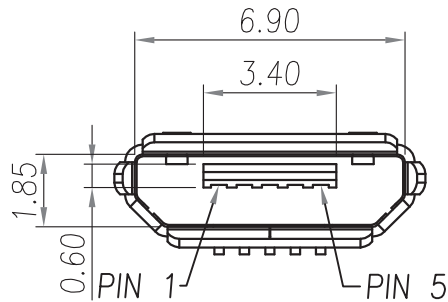
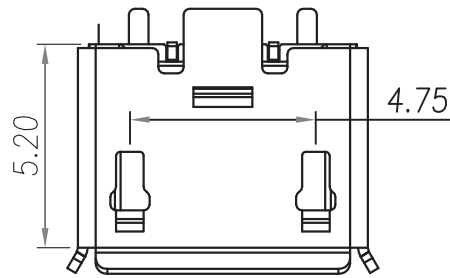


1. MATERIAL :



- 1-1. HOUSING : LCP UL94V-0 ; COLOR : BLACK
- 1-2. CONTACT : PHOSPHOR BRONZE
- 1-3. SHELL : STAINLESS STEEL
- 1-4. CAP : LCP UL94V-0 ; COLOR : BLACK

2. FINISH :

- 2-1. CONTACT : CONTACT AREA : SEE TABLE A
GOLD FLASH ON OTHER AREA
UNDERPLATED : SEE TABLE A
- 2-2. SHELL : MATTE TIN PLATED

3. Environmental :

- 3-1. Operation Temperature : -40°C~105°C

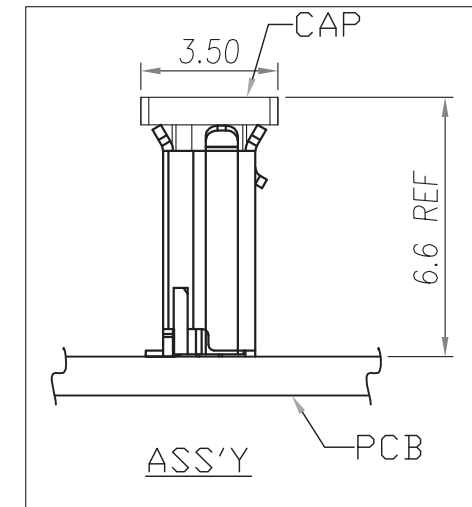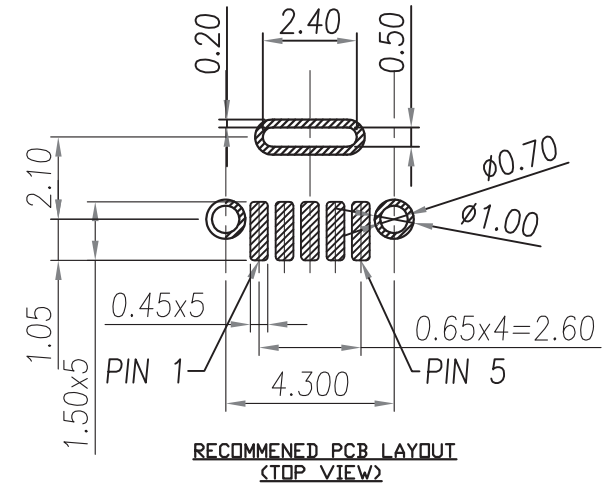

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

MISB-SVMXCR-5B-LF

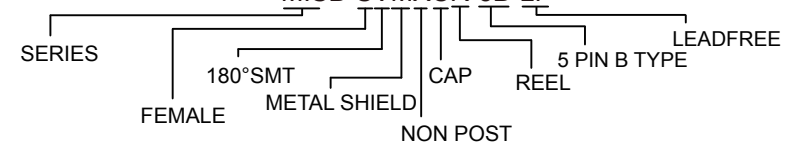



DESCRIPTION: MICRO USB 5PIN(F) 直立式 DIP

步驟一:

- 1.將成品一一放入包裝盤內,依同一方向置入.
- 2.包裝方式,如圖所示.
- 3.一個包裝盤內1100pcs.


步驟二:

- 1.一個紙箱可以裝14個包裝盤.
- 2.每盤1100pcs,每箱15400pcs.
- 3.將包裝盤放入防水袋中,包裝完後再封箱.

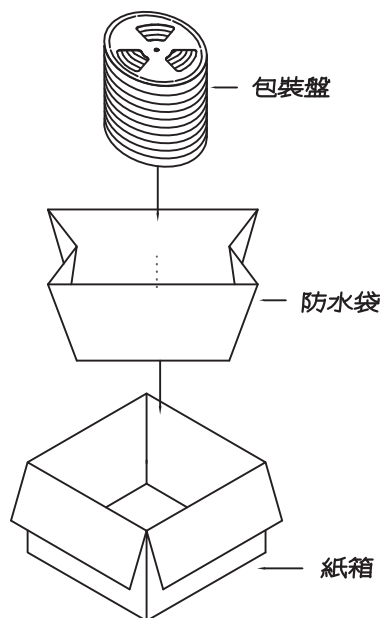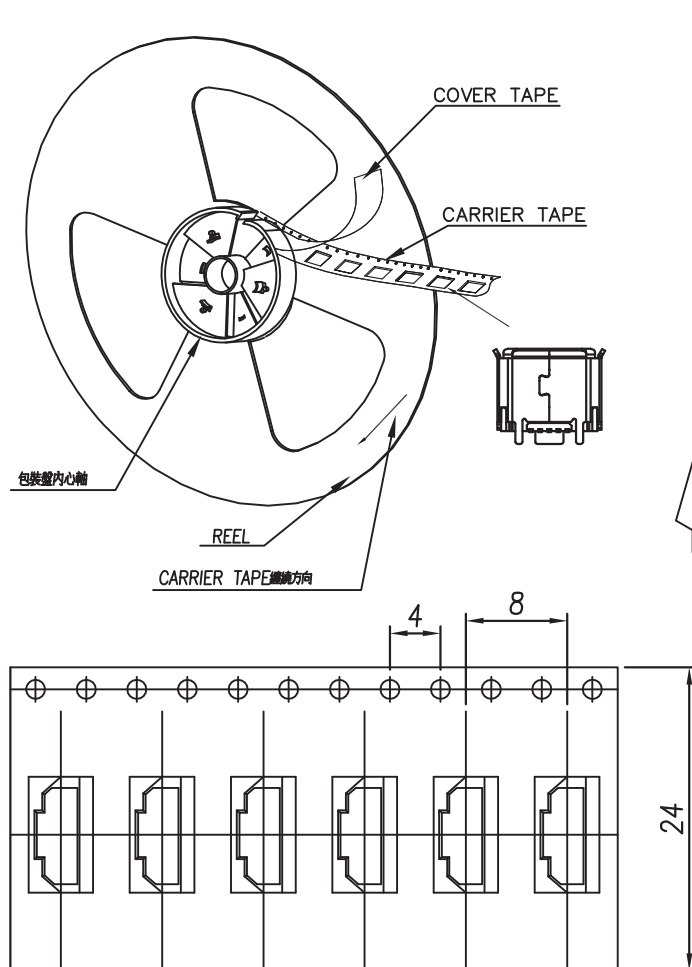

步驟三:

- 1.用膠帶將紙箱封實.
- 2.將標籤貼於紙箱上.

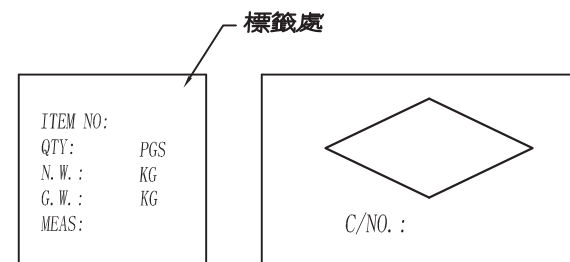

NOTE:

- 1.若有未裝滿之零數箱,必須以緩衝材塞滿.
- 2.在搬運過程中要輕拿輕放.
- 3.載運輸中不可堆放過多,不可有重壓現象.
- 4.在裝滿產品後,必須空留帶前和帶後15格以上,然後用紙膠布貼上.
- 5.上帶在貼下帶時必須平整,且黏貼處不要出現氣泡.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

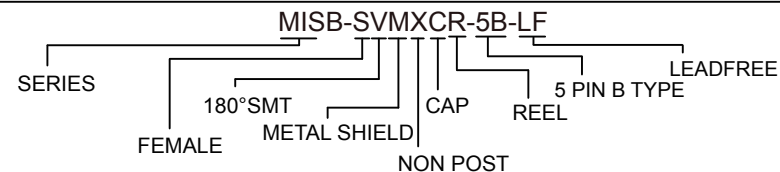

DESCRIPTION: MICRO USB 5PIN(F) 直立式 DIP