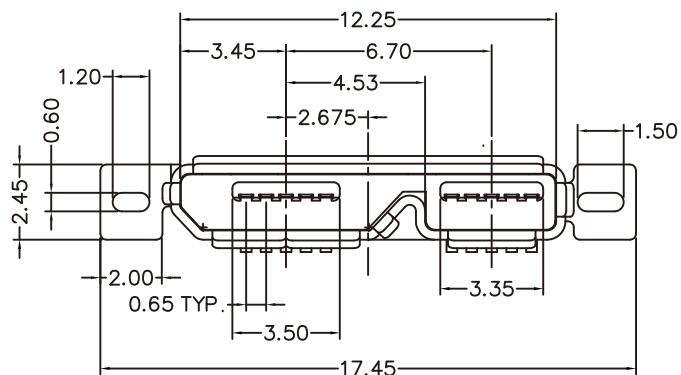


NOTE:

1. MATERIAL

HOUSING: HIGH TEMP. THERMOPLASTIC

CONTACT: BRASS




SHELL: BRASS

2. FINISHING


CONTACT: GOLDFLASH ALL AREA

NICKEL(50u" MIN.) UNDERPLATED OVER ALL.

SHELL: BRIGHT-TIN / NICKEL UNDERPLATED

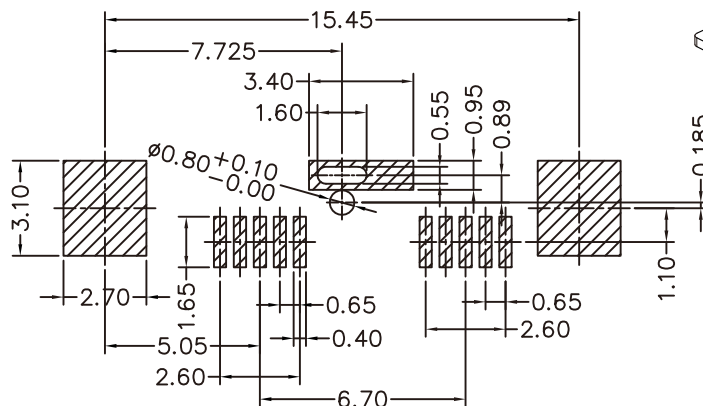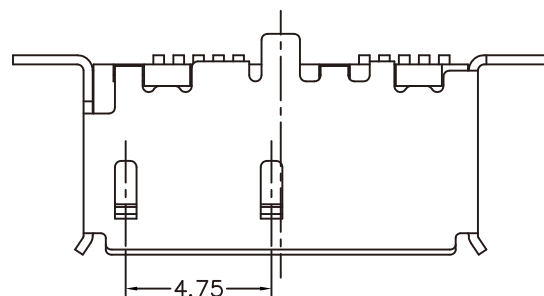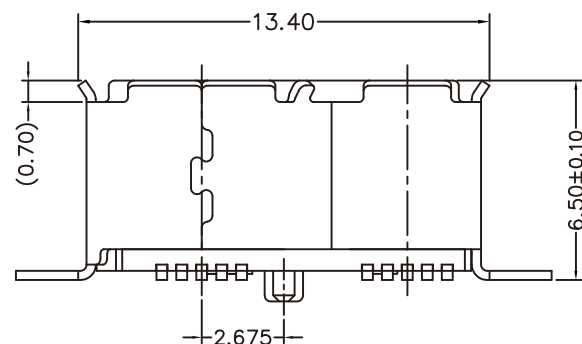

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

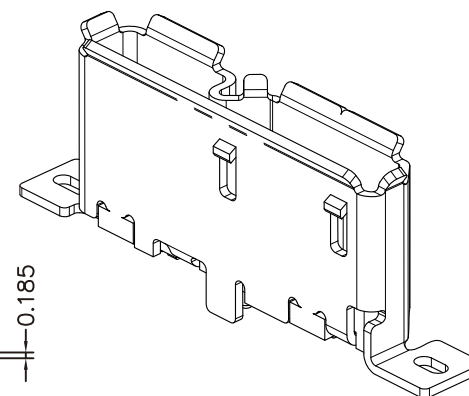

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.15
.XX ± 0.10
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MISB-SVPME-10B-LF

SERIES
LEAD FREE
10 PIN B TYPE
METAL EAR
POST
180°SMT
FEMALE

DESCRIPTION: USB3.0 Micro B SMT TYPE 180度 鐵腳DIP