
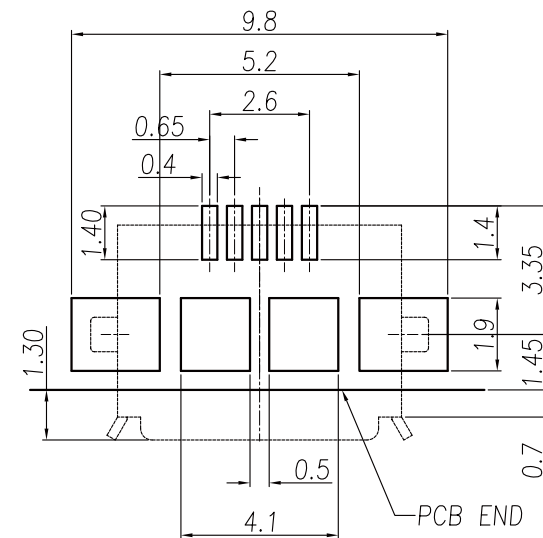

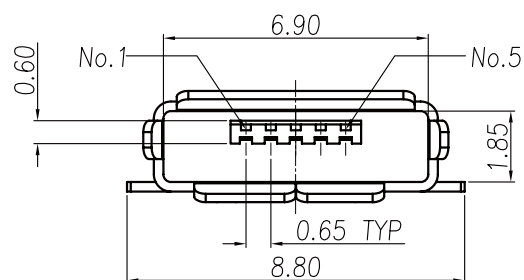
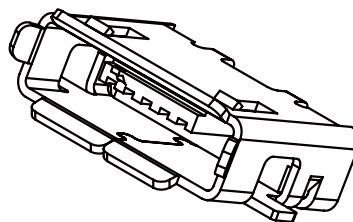


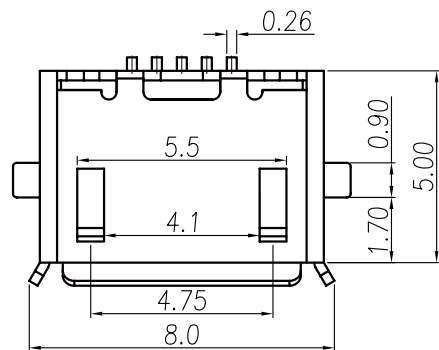

RECOMMEND P.C.B LAYOUT

NOTE:

1.ELECTICAL PROPERTIES:

1-1.CONTACT CURRENT RATING:1.8A(ONLY PIN1,5) AT THE SAME TIME
0.5A AT CONTACT PIN 2,3,4 OTHER 1A(ONLY PIN2,3 4).

1-2.CONTACT RESISTANCE:30m Ohm MAX

1-3.INSULATION RESISTANCE:100M Ohm MIN AT DC 500V.


1-4.DIELECTRIC WITHSTANDING VOLTAGE:AC 100V AC/1 MINUTE 10mA.

2.MATERIAL:

2-1.PIN:PHOSPHOR BRONZE.

2-2.HOUSING:LCP.

2-3.SHELL:STAINLESS #304.

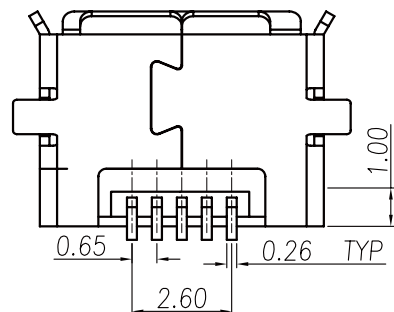

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

MISB-SW-5AB-LF

SERIES | LEADFREE
5 PIN AB TYPE
90°SMT
FEMALE

DESCRIPTION: MICRO USB 5P(F) AB TYPE