

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 50 milliohms Max
- 4.Dielectric Withstanding Voltage:
300 V AC AT Sec Level
- 5.Insulation Resistance: 100 MEGA ohms Min

Mechanical:

- 1.Connector Mate and Unmate Force
Mate force: 3.0 kgf (Max)
Unmate force: 0.7 kgf (Min)
- 2.Terminal Retention: 0.5 kgf (Min)

Material:

1.Housing:





High Temperature Thermal Plastics,
UL 94V-0 , LCP , Black

2.Contact: PHOSPHOR BRONZE


3.Shell: BRASS

Finish:

- 1.Contact: Plated Gold in Mating Area;
Tin on Solder Balls
- 2.Shell: Nickel Plating

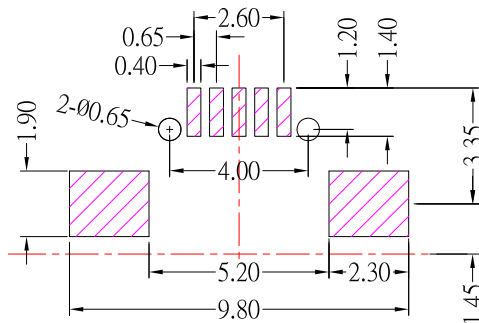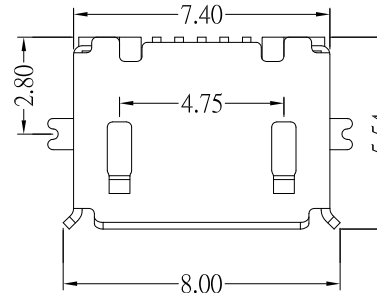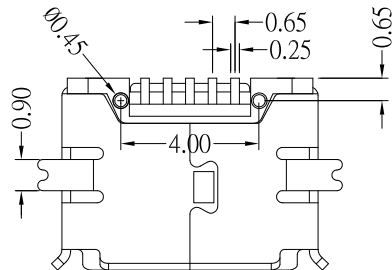

P.C.B LAYOUT MOUNTING PATTERN

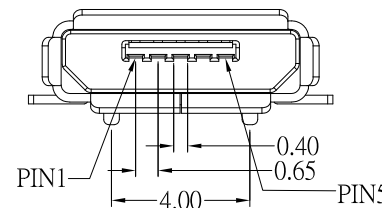

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±


照片框

ORDER INFORMATION

MISB-SWEP40R-5AB-LF
SERIES | | | | LEADFREE
FEMALE | | | | REEL
EAR POST 4.0mm
90°SMT

DESCRIPTION: MICRO USB 2.0 AB TYPE

包裝作業示意圖：

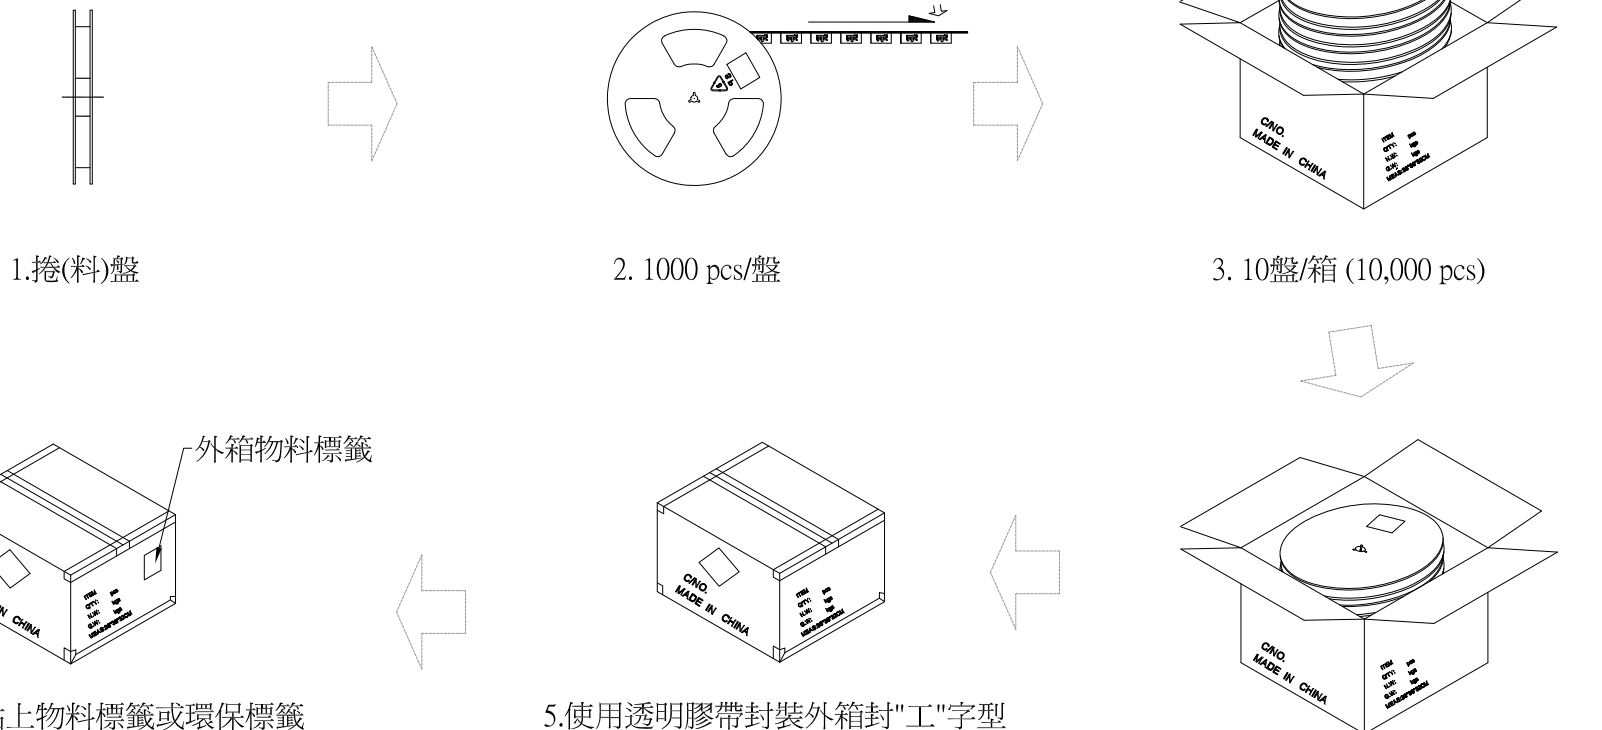

註記:

1. 捲(料)盤：380X28 mm；
2. 每盤裝1000 PCS；
3. 每箱裝10盤(10,000 pcs)；
4. 外箱尺寸：長X寬X高 36X36X32 cm；
5. 產品放入紙箱後，將紙箱擺放好，貼好包裝膠帶，然後在紙箱上貼上物料標籤，及環保標籤。

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWEP40R-5AB-LF

SERIES LEADFREE

5 PIN AB TYPE

FEMALE REEL POST 4.0mm

90°SMT

DESCRIPTION: MICRO USB 2.0 AB TYPE