
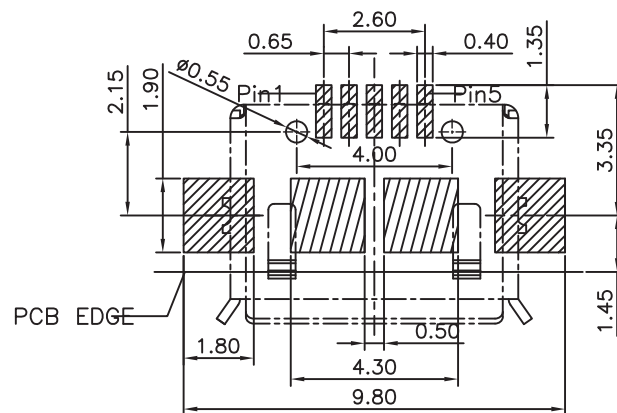
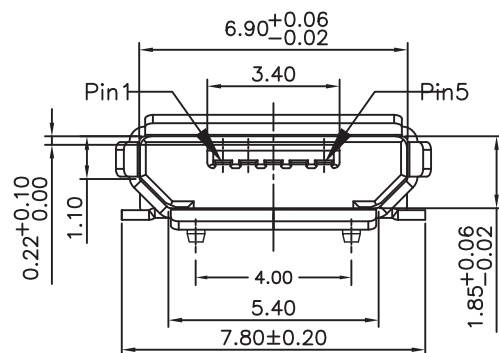
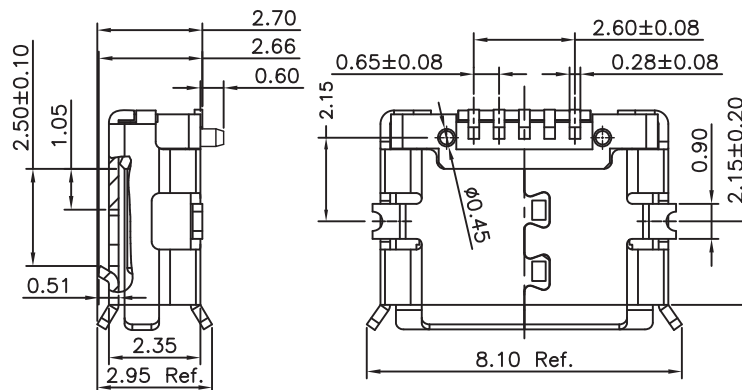
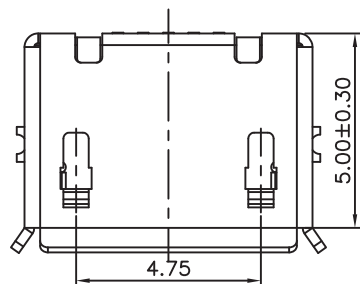



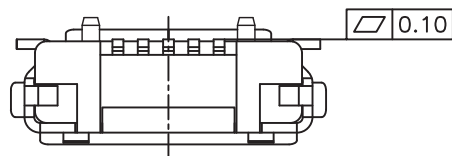

P.C.B LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: COPPER ALLOY & STAINLESS STEEL,
TIN PLATED & NICKEL PLATED
TERMINAL: COPPER ALLOY, GOLD PLATED OVER ALL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°




PPOJECTION

照片框

ORDER INFORMATION

MISB-SWEP40R-5B-LF
SERIES | | | | LEADFREE
FEMALE | | | | 5 PIN B TYPE
REEL
POST 4.0mm
EAR
90°SMT

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE, WITH POST

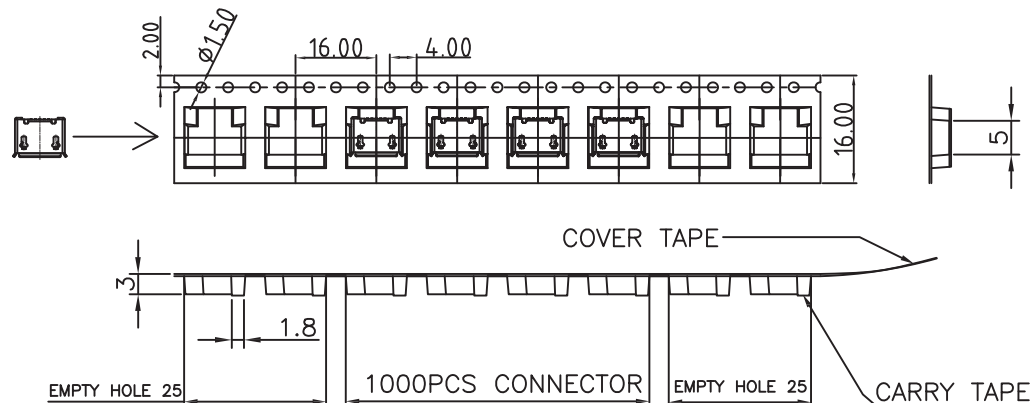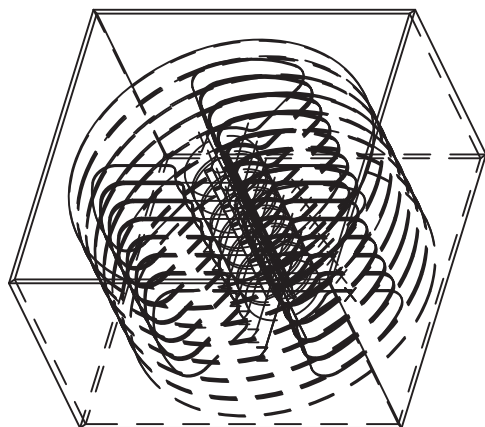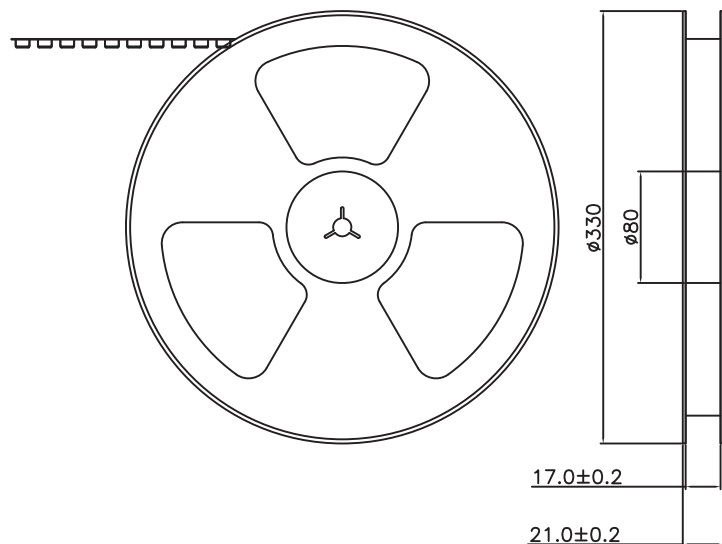

NOTE:

1. QUANTITY

1000PCS/REEL

10 REEL/CARTON

10000PCS/CARTON

2. DIMENSIONS & MATERIALS

CARRIER TAPE: POLYPROPYLENE

TOP TAPE: POLYESTER, POLYETHYLENE

REEL: POLYSTYRENE

CARTON A=B 360(L)*360(W)*320(H)MM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWEP40R-5B-LF

SERIES | | | | LEADFREE
5 PIN B TYPE
REEL
POST 4.0mm
FEMALE | EAR
90°SMT

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE, WITH POST